

# 2015 Robles Fish Passage Facility Progress Report

## U.S. Drought Monitor West

**August 11, 2015**  
(Released Thursday, Aug. 13, 2015)  
Valid 8 a.m. EDT

Drought Conditions (Percent Area)

	None	D0-D4	D1-D4	D2-D4	D3-D4	D4
<b>Current</b>	26.53	73.47	59.95	42.43	23.22	7.62
<b>Last Week</b> 8/4/2015	26.53	73.47	60.09	42.99	22.24	7.17
<b>3 Months Ago</b> 5/12/2015	22.69	77.31	63.10	38.04	17.54	7.95
<b>Start of Calendar Year</b> 12/31/2014	34.76	65.24	54.48	33.50	18.68	5.40
<b>Start of Water Year</b> 9/30/2014	31.48	68.52	55.57	35.65	19.95	8.90
<b>One Year Ago</b> 8/12/2014	27.11	72.89	59.80	43.63	21.43	8.90

Intensity:

- D0 Abnormally Dry
- D1 Moderate Drought
- D2 Severe Drought
- D3 Extreme Drought
- D4 Exceptional Drought


*The Drought Monitor focuses on broad-scale conditions. Local conditions may vary. See accompanying text summary for forecast statements.*

**Author:**

Brian Fuchs  
National Drought Mitigation Center



<http://droughtmonitor.unl.edu/>

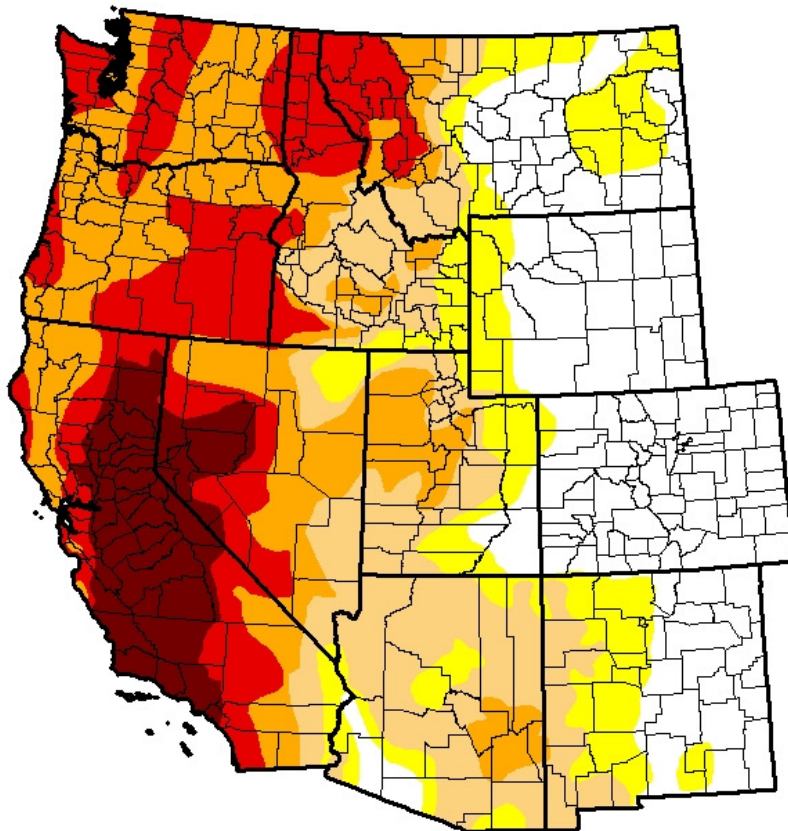

Map identifying the scope and strength of the current historic 4-year exceptional drought affecting much of California.

Casitas Municipal Water District  
1055 Ventura Avenue  
Oak View, California 93022

## TABLE OF CONTENTS

	Page
1.0 EXECUTIVE SUMMARY.....	4
2.0 GENERAL INTRODUCTION.....	5
3.0 UPSTREAM FISH MIGRATION IMPEDIMENT EVALUATION.....	7
3.1 <i>Sandbar Monitoring</i> .....	11
4.0 EVALUATE FISH MOVEMENT THROUGH THE PASSAGE FACILITY .....	14
4.1 <i>Water Velocity and Depth Validation Evaluation</i> .....	14
4.2 <i>Fish Attraction Evaluation</i> .....	14
4.3 <i>Downstream Fish Passage Evaluation</i> .....	17
5.0 DOWNSTREAM FISH MIGRATION THROUGH THE ROBLES REACH .....	18
6.0 LONG-TERM MONITORING COMPONENTS.....	19
6.1 <i>Monitor Robles Facility Operations</i> .....	19
6.1.1 Facility Status .....	19
6.1.2 Flow Observations and Control.....	20
6.1.3 Costs Associated with Operation and Monitoring .....	22
6.1.4 Water Velocity and Depth Validation Evaluation.....	22
6.1.5 Recommendations for Prioritization of Future Activities.....	23
6.1.6 Recommendations Deemed Necessary to the Operations .....	23
6.2 <i>Fish Passage Monitoring</i> .....	24
7.0 ADDITIONAL BIOLOGICAL AND ENVIRONMENTAL MONITORING STUDIES ...	29
7.1 <i>Oncorhynchus mykiss Presence/Absence Surveys</i> .....	29
7.2 <i>Adult Index Spawning Surveys</i> .....	30

7.3 *Ambient Water Quality Monitoring* ..... 31

7.4 *Estuary/Lagoon Monitoring*..... 32

7.5 *Surface Flow Monitoring*..... 32

7.6 *Photographic Index Sites*..... 33

7.7 *Underwater Video Monitoring* ..... 33

7.8 *Stranding Surveys* ..... 34

8.0 LITERATURE CITED AND BIBLIOGRAPHY ..... 35

9.0 APPENDICES ..... 41

## 1.0 EXECUTIVE SUMMARY

Casitas Municipal Water District (CMWD) is implementing the Robles Fish Passage Facility Project (Robles Fish Facility) described in the Proposed Action of the Bureau of Reclamation's Biological Assessment (BA); (USBOR 2003). The effects of the Robles Fish Facility were analyzed in the Biological Opinion (BO) prepared by the National Marine Fisheries Service (NMFS 2003a). This 2015 Robles Fish Passage Facility Progress Report, as described by the BO, is the culmination of monitoring, evaluation, and operational data collected during the reporting period of 01 July 2014 to 30 June 2015.

The monitoring and evaluation studies related to the Robles Fish Facility conducted during the 2014-2015 reporting period are included in two main sections of this progress report. The Fisheries Monitoring and Evaluation section includes: upstream fish migration impediment evaluation, sandbar monitoring at the mouth of the Ventura River, fish attraction evaluation, fish passage monitoring, downstream fish passage evaluations, and downstream fish migration through the Robles Reach. The Facility Operation section includes: information and data on the facility status, flow observations and control, costs associated with operation and monitoring, assessment of the effectiveness to provide fish passage, recommendations of priorities for future activities, and revisions deemed necessary to the operations.

The 2015 fish passage season was dominated by the effects from the continuing four-year exceptional drought throughout much of California (see cover figure). River flows during the drought were too low, or nonexistent, to collect data for most aspects of the monitoring and evaluation program. The sandbar at the mouth of the Ventura River was closed for a substantial period of time during the reporting period and provided little opportunity for volitional steelhead passage except for a brief period in December and January. No *O. mykiss* were detected passing through the Robles Fish Facility during the fish migration period of 2015.

## 2.0 GENERAL INTRODUCTION

NOAA Fisheries listed the southern California steelhead, *Oncorhynchus mykiss*, as endangered in 1997 (NMFS 1997) under the Endangered Species Act (ESA, 16 U.S.C. § 1531 et. seq.) of 1973, as amended. Steelhead were organized into stocks (i.e., groups) of evolutionary significant units (ESU) that were considered to be substantially reproductively isolated from other steelhead stocks and were an important part of the evolutionary legacy of the species. The southern California steelhead ESU included, at that time, steelhead populations from the Santa Maria River in San Luis Obispo County south to Malibu Creek in Los Angeles County. The ESU was later extended to the US/Mexican border in San Diego County during 2002 (NMFS 2003b). In a later delineating approach, NOAA Fisheries recognized the anadromous life history form of *O. mykiss* as a distinct population segment (DPS) as described under the ESA (NMFS 2005). The DPS policy differs from the ESU by delineating a group of organisms by “marked separation” rather than “substantial reproductive isolation” as originally listed. In the case of *O. mykiss* of the southern California steelhead ESU, this marked separation between the two life history forms was considered valid because of physical, physiological, ecological, and behavioral factors related to its anadromous life history characteristics. Both resident and anadromous *O. mykiss*, where the two forms co-occur and are not reproductively isolated, are still part of the ESU; however, the anadromous *O. mykiss* (i.e., steelhead) are now part of a smaller subset identified as the southern California steelhead DPS.

Rainbow trout (*O. mykiss*) can be generally organized into four large groupings (Behnke 1992; Scott and Crossman 1973): 1) coastal rainbow trout that extend from northern Baja California to northern Alaska near the Kuskokwim River and also the Kamchatkan Peninsula of northeastern Asia, 2) redband trout of the inland Columbia and Frazer River basins, 3) redband trout of the central valley of California, and 4) trout of the Gulf of California drainages. The taxonomic group of coastal rainbow trout, *O. m. irideus*, exhibit two life history forms; anadromous and resident. The common name for the anadromous life history form is termed steelhead trout and the resident form is generally

termed rainbow trout. Throughout the range of coastal rainbow trout, there is a widespread occurrence of the anadromous life history form (Behnke 1992). There are two general life history patterns exhibited by adult anadromous steelhead when they return from the ocean to spawn in fresh water. The patterns are grouped by either summer or winter spawning runs. There are many exceptions to this pattern, but this general characterization has been used to group steelhead runs by the season in which the peak spawning occurs as they return from the ocean (Busby et al. 1996). Summer steelhead are generally found in river systems that drain from farther inland, such as the Columbia River basin. Winter steelhead runs are typically found in the coastal systems where the river systems are not as large. The winter steelhead life history pattern is the most abundant anadromous life history within the natural range of the species (Busby et al. 1996).

#### Monitoring and Research of the Diversion and Fish Passage Facility

As stated in the BO (NMFS 2003a), the “Modifications to the Robles Diversion Facility and associated operation criteria have been targeted at improving fish passage conditions within the Robles Reach of the Ventura River while maintaining suitable conditions through the Fish Passage Facility.” The monitoring and evaluation studies and activities related to the modification of the Robles Facility, as outlined in the BO (NMFS 2003a), were intended to achieve three main objectives:

- I. Monitor Fish Passage Facility operations and performance.
- II. Determine if the Fish Passage Facility functions and operates in such a fashion that migrating steelhead:
  - a. Successfully navigate into and through the facility, and
  - b. Move through the facility in good physical condition.
- III. Determine if the operations at the Robles Diversion are enhancing the opportunity for:
  - a. Adult steelhead to migrate upstream to the Robles Facility, and
  - b. Smolts and kelts to migrate downstream through the Robles Reach.

### 5-year Reevaluation of Initial Evaluation and Monitoring Activities

As described in the BO, a 5-year reevaluation of the initial fish flow operations would be conducted to determine if monitoring and evaluations have been completed (NMFS 2003a). The initiation of the 5-year period began in 2006, which was the first year the Robles Fish Facility was fully operational. An annual and ongoing reevaluation began after the 2010 fish passage season. Through the Cooperative Decision Making Process, the Robles Biological Committee will review annually each of the specific evaluations and determine if the original objectives have been addressed and could be discontinued or if additional study would be needed. Due to the variable water conditions and insufficient numbers of adult and juvenile steelhead, the objectives of the monitoring and evaluation program have not been accomplished. This has only been exacerbated by the ongoing historic 4-year exceptional drought affecting California. Each aspect of the monitoring and evaluation program will be assessed annually to determine if sufficient information has been collected to complete each objective. It is recommended that all aspects of the monitoring and evaluation for the Robles Fish Facility be continued during 2016.

### 3.0 UPSTREAM FISH MIGRATION IMPEDIMENT EVALUATION

#### Introduction

The ability of adult steelhead to swim upstream can be impeded during the migration season at times of low-river flow (NMFS 2003a). Evaluations at shallow water habitat units (i.e., critical riffles) have been commonly used as a method to determine if impediments exist for adult and juvenile steelhead in California rivers (Dettman and Kelley 1986; Bratovich and Kelley 1988; Hagar 1996). The Robles Reach, which extends downstream from the Robles Fish Facility approximately 6.5 km (NMFS 2003a) to just upstream of the Santa Ana Boulevard bridge (Appendix 1), is a wide alluvial section of the Ventura River that is composed of active wash deposits of unconsolidated silt, sand, gravel, and boulders (Tan and Jones 2006). Due to this type of channel

morphology and geology, alluvial channels like the Robles Reach have high infiltration rates that cause channel surface flow to rapidly recede and cease shortly after storm events (Cooke et al. 1992).

An initial assessment of potential passage impediments in relation to river discharge was completed by ENTRIX (1999). The physical characteristics of seven potential impediments were evaluated using the Thompson (1972) passage criteria. The Thompson (1972) passage criteria for adult steelhead at critical riffles is a water depth of 0.6 ft for 25% of the total transect width and a continuous portion equal to 10% of the total transect width. ENTRIX (1999) also evaluated the potential impediments using criteria of 0.5 ft and 0.6 ft depth for 25% of the total width and a total of 8 ft width for both depths. The resulting discharge required was estimated to be between 40 and 65 cfs. There have been several modifications to the Thompson passage criteria by other researchers; Dettman and Kelly (1986) on the Carmel River used a depth of 0.6 ft over a 5 ft continuous section, a criteria of 0.6 ft depth over an 8 ft section was used on the Santa Ynez River (SYRTAC 2000), and Harrison et al. (2006) used a criteria of 0.6 ft depth over a 10 ft section on the Santa Clara River. Thompson's (1972) depth criterion of 0.6 ft was not based on actual migration observations and was never validated as a minimum condition for passage. It has been observed that adult salmonids can successfully move through riffles shallower than the 0.6 ft criterion (Mosley 1982).

The objective of the impediment evaluation is to assess factors that may impede steelhead's ability to migrate to the Robles Fish Facility (NMFS 2003a). Because of the potential for low-river flows to impede upstream fish migration in the Robles Reach, it will be the primary focus of the impediment evaluations (NMFS 2003a).

### Methods

Selected channel features that may pose an impediment to upstream passage were surveyed multiple times during the fish migration season (January through June) to measure water depth, velocity, and channel width along a transect at each site. The



selected sites were planned to be surveyed over a range of discharges from approximately 30-171 cfs (the upper limit is dependent on the ability to safely conduct the surveys), which is correlated with discharge at the Robles Fish Facility. The number of repeated surveys has been dependent on the number and duration of significant rain events, rate of hydrograph recession, and time constraints due to other aspects of the monitoring and evaluation program. Impediment surveys will likely be conducted over a number of years given the natural variation of water conditions. The selected impediment sites will be resurveyed as many times as needed to develop a statistically rigorous data set to evaluate fish passage in relation to Robles Fish Facility discharge.

During the initial phase, the Ventura River was surveyed from the mouth to the Robles Fish Facility (23 km) using standard stream survey techniques and was completed in 2008 (CMWD 2008). This provided physical measurements of all habitat units for the selection process. The survey methodology followed Moore et al. (2002) and was equivalent to a level IV survey as described in the California Salmonid Stream Habitat Restoration Manual (Flosi et al. 2002).

Over the course of three meetings and one conference call between 24 January and 18 June of 2009, the Biological Committee (BC) for the Robles Fish Facility completed an impediment site selection process that culminated in the original selection of eight sites that would be monitored for the impediment evaluation. The BC reviewed physical parameters of the 379 habitat units surveyed and general river characteristics that included: unit type, length, width, water depth, slope, longitudinal location (river km), step height on step units, discharge at Foster Park and the Robles Fish Facility at the time of the surveys, and a river profile for the 23 km of the Ventura River below the Robles Fish Facility. Upon completing an initial assessment of this data, a list of potential sites was developed that the BC visited in the field on 27 May 2009 to determine if monitoring was warranted. This data and field assessment included regular BC members (at the time of the assessment) Mike Kinsey (BOR), Stan Glowacki (NMFS), Mary Larson (CDFW), and Scott Lewis (CMWD). Mike Gibson (CMWD) and

hydrologists Bob Hughes (CDFW) and David Crowder (NMFS) were also involved in this assessment and selection process.

The flow event that peaked on 20 March 2011 at approximately 20,000 cfs at the USGS Foster Park gage station, a recurrence interval of about 6 years, significantly altered some impediments sites that necessitated modifications to the monitoring. See CMWD (2011) for a detailed description of the high-flow caused site alterations. A Biological Committee (BC) field assessment on 11 January 2012 was conducted to review alterations that occurred and select replacement sites for ones that no longer appeared to be impediments. Regular BC members (at the time of the assessment) Ned Gruenhagen (BOR), Rick Bush (NMFS), Mary Larson (CDFW), and Scott Lewis (CMWD) participated in this review and site-selection process; Mike Gibson (CMWD) and hydrologist Bob Hughes (CDFW) were also involved in this assessment and selection process. Based on this field review, Site 2 was no longer considered a potential impediment. Site 10 was identified as a replacement site during the January field trip. Site 8, which was originally selected during dry conditions, was not considered as restrictive as other potential sites after evaluating data collected during 2010 and 2011. Consequently, Site 8 was replaced with Site 9 during the January field trip. The complete list of current impediment sites that the BC visited and determined to be satisfactory for monitoring during the 2012 season can be found in Appendix 2. However, at the time the new site selections were made (i.e., 11 January 2012), insufficient flows were available to make final site selection or transect placements. Until March of 2014, the lack of precipitation and subsequent insufficient surface flow, did not allow for confirmation of these new sites. This confirmation was completed after the March 2014 storm provided the first notable surface flows in 3 years and allowed available members of the BC to visit sites 9 and 10 on 03 March 2014. The confirmation was conducted by Scott Lewis (CMWD), Dana McCanne (CDFW), and Mike Gibson (CMWD).

## ENTRIX Site Assessments

An effort was made to locate and determine the status of the ENTRIX (1999) study sites during 2009. Because there had been numerous bed-mobilizing runoff events after the study was completed, the current status of the sites was unknown. Based on the site descriptions in the ENTRIX (1999) study report, field surveys were conducted to locate and describe the existing channel conditions at the original site locations. Of the seven sites originally identified by ENTRIX (1999), only four sites were located with any degree of certainty. Of those four sites, all were no longer in the primary low-flow channel. A more detailed description of the ENTRIX sites can be found in a previous progress report (CMWD 2011).

## Results

During the reporting period, no BO-defined storm events occurred. Precipitation in the Ventura River basin ranged from approximately 40-60% of normal for the 2015 water year. A total of 18.5 inches of precipitation was measured in Matilija Canyon (Ventura County site 207c). Daily mean discharge into the Robles Fish Facility ranged from 0 to 42 cfs. However, flow evaluations were not able to be conducted in 2015 and no data were collected due to the ongoing exceptional 4-year drought. Even though no data were collected during 2015, Appendix 3 was included in this progress report to provide the current status of data collection for each impediment site.

### *3.1 Sandbar Monitoring*

#### Introduction

The Ventura River, like many other California rivers, frequently develops a seasonal sandbar at the mouth during the late spring or summer that is breached by higher river flows in the late fall or winter. If a sandbar develops, which occurs more often during dry years, the resulting lagoon can provide important rearing habitat for steelhead

juveniles because of the abundant food resources available that can facilitate the physiological and behavioral changes associated with smoltification (Cannata 1998) and can also enhance marine survival (Bond et al. 2008).

The primary objective of the sandbar monitoring is to determine if the criteria for initiation of the fish passage augmentation season have been met (NMFS 2003a). As stipulated in the BO, the fish passage augmentation season will extend from 01 January through 30 June of each year and will commence after the sandbar has been breached at least once during the current year's fish flow operations season. During the fish passage augmentation season, several Robles Fish Facility operation criteria must also be implemented (see NMFS 2003a for a complete list of operational criteria).

### Methods

During each sandbar inspection, observations and recordings were made that included: date, time, status of the sandbar, general location of the mouth, tidal stage, water temperature, and discharge at the Robles Fish Facility and the USGS Foster Park gage station. The sandbar was open on 02 January 2015 and its status was monitored once every two weeks through June. Outside of the fish passage augmentation season the sandbar was monitored at least monthly.

### Results

During the reporting period, July 2014 through June 2015, the mouth of the Ventura River was inspected 22 times to determine if the sandbar was open or closed. There were 14 observations that occurred during the fish passage augmentation season (January through June 2015) and 8 observations outside of the season. The sandbar was open only 14% of the time during the fish passage augmentation season (Appendix 4). At the beginning of the fish passage augmentation season, the sandbar was open and volitional passage into the estuary was possible. Only during three inspections was the sandbar open (middle of December and first half of January), and the sandbar was

closed for the remainder of the 2015 fish passage augmentation season. During five of the inspections when the sandbar was closed, there was evidence (i.e., wet sand on the lagoon side of the sandbar with a small debris line) that intermittent saltwater intrusions occurred that overtopped the sandbar. However, these overtoppings were not sufficient to erode the sandbar and cause water to exit the lagoon. This condition occurred was present during 32% of the closed sandbar observations. When the sandbar opened as a result of a December storm, the period was brief and the sandbar reformed. On the days the sandbar was inspected during the reporting period, the mean daily discharge at the USGS Foster Park gage station ranged from approximately 0 to 3 cfs and 0 to 16 cfs at the Robles Fish Facility. When the sandbar was open, the river was observed exiting from the west side of the estuary during the reporting period.

### Discussion

The sandbar at the mouth of the Ventura River tends to remain open during average and above average precipitation years and closes only during years with few significant rain events (Lewis et al. 2010). This typical pattern of the sandbar remaining open during the fish passage season is illustrated from 2008 to 2011 (Appendix 5). This pattern typically includes a period during the summer and into the fall months of sandbar closure. A single low precipitation year can produce a longer period of closure, as occurred in 2007 and 2012.

The tendency of the sandbar to remain open in all but very dry years is likely due to a few probable factors. Although the middle reach of the Ventura River goes dry every year, during most years subsurface water continues to flow and eventually begins to resurface just upstream of the confluence with San Antonio Creek and continues to increase slightly proceeding downstream. Additionally, treated effluent water from the Ojai Valley Sanitary District at rkm 7.5 increases the river discharge by approximately 3 cfs. Finally, tributary flow from San Antonio Creek also adds to the Ventura River through a surface or subsurface connection throughout the year. These factors likely contributed water to the Ventura River keeping the sandbar from fully forming and

therefore remaining open during most years. The status of the sandbar indicates changes in the estuary/lagoon that may help determine potential entry and exit conditions for adult steelhead and juvenile *O. mykiss* migrating to the ocean. It appears that passage conditions remain suitable during most seasons when steelhead are likely migrating. However, lagoon conditions optimal for juvenile rearing (i.e., when a sandbar closes and results in an estuary forming a deeper freshwater lagoon; Bond et al. 2008), appear to have been limited during the study period beginning in 2005. The ongoing drought of four consecutive years of below-normal precipitation (about 50-60% of average) have created conditions at the mouth of the Ventura River causing the sandbar to be closed for the majority of the time during the monitoring period. This has occurred even though some surface water has continued to flow into the lagoon. Furthermore, the amount of time the sandbar was closed over the last 3 years was the greatest since monitoring began in 2005 (Appendix 5).

#### 4.0 EVALUATE FISH MOVEMENT THROUGH THE PASSAGE FACILITY

##### 4.1 *Water Velocity and Depth Validation Evaluation*

Insufficient flows during the 2014-2015 season prevented data collection for the performance testing evaluation.

##### 4.2 *Fish Attraction Evaluation*

###### Introduction

River discharge has been shown to be one of several key environmental factors initiating and facilitating steelhead and other salmonids adult and juvenile migrations in natural fluvial environments (Shapovalov and Taft 1954; Banks 1969; Spina et al. 2005). As adults and juveniles approach fish passage facilities, sufficient discharge and water velocities become even more important to ensure successful passage through any facility (Clay 1995; Beeman and Maule 2001).

The entrance of the fish ladder at the Robles Fish Facility is located approximately 20 m downstream of the spillway gates and is where fish migrating upstream enter and where fish migrating downstream exit the facility (i.e., two-way passage facility). The downstream end of the ladder is adjacent to a large pool (entrance pool) that was scoured out after construction in 2005 and has been maintained by high discharges through the spillway gates. The ladder was designed for a maximum discharge at the exit of 171 cfs (50 cfs through the entire ladder and an additional 121 cfs can be supplemented at the lower end of the ladder). The distance downstream from the entrance pool to the lower most interim rock weir is approximately 200 m. This reach includes all four rock weirs and the facility's low-flow road crossing, which is also the weir used to measure discharge from the Robles Fish Facility. The habitat unit types that can be used by migrants in this reach include the four pools created by the weirs, a glide created by the low flow road crossing, a riffle, and the entrance pool.

The objective of the fish attraction evaluation is to determine if adult or juvenile steelhead are holding immediately downstream of the Robles Fish Facility during the fish passage augmentation season (NMFS 2003a).

### Methods

Three separate methods were employed to determine the presence of *O. mykiss* for the Fish Attraction Evaluation to encompass a range of spatial and temporal scales. The methods used included: 1) Weekly bank/snorkel survey during the fish passage season, 2) post-storm bank/snorkel surveys in the entrance pool during the BO-defined ramp-down period, and 3) post-storm underwater video monitoring at the fish ladder entrance during the ramp-down period.

1) Weekly bank/snorkel fish attraction surveys were conducted during the fish passage season from January through March of 2015 when water was present. The small December 2014 and January 2015 storms created surface flows and allowed surveys to be completed for approximately 3 months. This method has been used since 2007. The

particular survey methodology used (i.e., bank or snorkel) was determined based on water visibility, river discharge, expected steelhead life history stage present at the time of the survey, and safety of surveyors. A combination of bank and snorkel surveys were conducted during the 3-month period. Bank surveys were conducted by one or two surveyors in an upstream direction. The surveyors wore polarized sunglasses to reduce water-surface reflection. Snorkel surveys were conducted by one or two surveyors in an upstream direction. If present, fish species were identified and enumerated to the greatest extent possible permitted by the ambient river conditions and fish densities at the time of each survey. If *O. mykiss* were present, lengths of each fish was estimated to the nearest cm if only a few individuals (generally <10) were present. In order to collect additional information that may help determine *O. mykiss* upstream and downstream movements through the Robles Fish Facility, an upstream study reach was added in 2009. The upstream study reach included observations in the screenbay of the facility and the area immediately upstream of the low-flow fish exit in the forebay. The total distance of this upstream reach was approximately 140 m.

2) Post-storm bank/snorkel surveys were to be conducted in the entrance pool during the ramp-down period for any BO-defined storm. This would have consisted of daily surveys during the 12-day augmentation period. Beginning the day after a BO-defined peak event, a Secchi visibility would be measured in the entrance pool to determine when survey could begin. Bank surveys would be conducted while visibility was poor and snorkel surveys would be conducted after visibility increased (> 1.0 m Secchi), assuming this would allow *O. mykiss* to be observed.

3) The post-storm underwater video monitoring was to be conducted after BO-defined storm and ramp-down period. After the storm event occurred, video cameras would be installed at the entrance of the fish ladder during the 12-day ramp down period. The video cameras would be mounted on a bracket adjacent to the fish ladder entrance and lowered into place to provide monitoring following the storm event.



## Results

1) A total of 12 surveys were completed during the weekly surveys and no *O. mykiss* were observed (Appendix 6). During the 3-month period, a total of 3,380 m were surveyed by either bank or snorkel methods. The water temperatures during the study period ranged from 14°C in January to 19°C in March and turbidity was less than 2 NTUs when the surveys were conducted. The mean daily discharge at the Robles Fish Facility ranged from 0 to 5 cfs at the time of the surveys. Flowing water remained in the upper portions of the survey reach (< 1 cfs) even though no flow was passing over the weir before the entire survey reach went dry.

2) There were no BO-defined storm events thus no post-storm fish attraction surveys were conducted.

3) There were no BO-defined storm events thus no post-storm underwater monitoring was conducted.

### *4.3 Downstream Fish Passage Evaluation*

#### Introduction

Passage evaluations of salmonids migrating through fish passage facilities have been conducted throughout the western United States for many years (Odeh 2000). Methods to determine if a facility is operating as designed and not causing harm to the intended fish species vary. Early work typically entailed trapping and tagging fish before entering a facility and recapturing them after exiting. Trapping and visual inspections for injuries, PIT tagging, radio telemetry, and acoustical telemetry has been conducted extensively as well.

There are two objectives for the downstream fish passage evaluation. The first objective is to determine if downstream migrants are successfully passing through the

Robles Fish Facility. The second objective is to capture and examine steelhead smolts and kelts and determine if injuries are occurring as they pass downstream through the Robles Fish Facility (NMFS 2003a).

### Methods

Due to low precipitation, trapping was not conducted during 2015 and no data were collected for the Downstream Passage Evaluation. For a full description of evaluation methods, see the 2016 CMWD monitoring and evaluation study plan (Lewis et al. 2015).

## 5.0 DOWNSTREAM FISH MIGRATION THROUGH THE ROBLES REACH

### Introduction

When the number of fish physically handled in a study is of concern, such as with an endangered species, radio telemetry can be a useful method over others like extensive trapping (Hockersmith et al. 2000). Telemetry migration information of steelhead smolts in the Ventura River would allow for the determination of survival, travel time and rates through select reaches, migration relative to river discharge, habitat use, and passage success through critical riffles. By tracking the tagged fish until the batteries die, it is anticipated that downstream migration can be monitored all the way to the Ventura River estuary/lagoon and could provide important data on estuary rearing and emigration behavior.

The purpose of the downstream migration evaluation is to determine how successful smolts are at migrating through the Robles Reach (NMFS 2003a). Because of the limited number of steelhead smolts likely passing downstream through the facility, a NMFS approved pilot study using radio telemetry was used for evaluations.

Due to low precipitation, trapping was not conducted during 2015 and no data were collected for the Downstream Fish Migration through the Robles Reach evaluation. For

a full description of evaluation methods, see the 2016 CMWD monitoring and evaluation study plan (2015).

## 6.0 LONG-TERM MONITORING COMPONENTS

### 6.1 *Monitoring Robles Facility Operations*

#### 6.1.1 Facility Status

The Robles Fish Passage Facility started the 2014-2015 season in a fully functional mode. The 2014-2015 season was characterized by a below average rainfall year as measured at Casitas Dam. Only 11.3 inches of rain were measured at Casitas Dam during the reporting period. The average rainfall at the dam is 23.91 inches. This was the fourth straight year with below average rainfall, and third year in a row with less than 50 percent of average rainfall. No water was downloaded from Lake Matilija to Robles and no valves were operated at Matilija Dam.

The 2014 Report identified several projects to be completed during the summer and fall. The principal projects were:

- Modify the differential level sensors at the fish ladder entrance to individually read water levels.
- Install Sontek IQ flow measurement devices in the fish passage and the auxiliary flow pipe.

A brief description of each project and the project's status is listed below:

Modify the differential level sensors at the fish ladder entrance to individually read water levels-Casitas is continuing to work with the instrumentation engineer to record the fish ladder entrance pool level. This is not a BO requirement.

The Sontek IQ flow measurement devices were installed in the fish passage and the auxiliary flow pipe. There was insufficient data to determine if the Sontek IQ's functioned properly because of the lack of measurable surface flow this year.

### 6.1.2 Flow Observations and Control

Flow and level measurement devices are located at various locations within the Robles Fish Passage Facility. The primary points of measuring and recording stream flows entering, flowing through, and leaving the Robles Fish Passage Facility are:

- Matilija Creek at Matilija Hot Springs – located approximately 2,100 feet downstream of Matilija Dam – good rating for low to moderate flows – operated by Casitas Municipal Water District, formerly a USGS station; A second gaging station at this location is operated by the County.
- Matilija Dam Stage Bubbler-Located at the dam, this gage provides the lake elevation. Under high flows, the dam acts as a weir. This is the primary flow measurement location under high flows and to determine if a peak has occurred.
- North Fork Matilija Creek – located approximately 3,000 feet upstream of its confluence with Matilija Creek – good rating for low to moderate flows – operated by the Ventura County Watershed District;
- Robles-Casitas Diversion Canal – located on the diversion canal approximately 1,300 feet downstream of the Robles headworks – trapezoidal channel with a good rating for flows up to 600 cfs;
- Ventura River near Meiners Oaks (VRNMO or Measurement Weir) – located approximately 540 feet downstream of the Robles Fish Passage spillway – concrete weir section – good rating to 100 cfs, use of equations above 100 cfs with no verifications at higher flows above 1000 cfs. This is the most reliable flow measurement for the fish passage and downstream releases with a 50-year plus history. This site was formerly a USGS site.
- Fish Ladder-A 4 path flow meter by Accusonics located near the Riverwatcher. This flow meter has not been accurate since the installation of the replacement Vaki shroud. This flow measurement device was functional during the 2013-14 and 2014-15 seasons but the readings were very volatile. It appears that the Vaki shroud is still influencing the readings at this location. A Sontek IQ Plus has been added to this location to measure flow in the fish passage.

- Auxiliary Water Supply-An American Sigma flow meter. This meter has not provided reliable readings. Troubleshooting the problem is problematic because of infrequent flows necessitating the use of the auxiliary (attraction flow) flow system and because NMFS interpretation of the BO does not allow the system to be dewatered for inspections. This meter read “zero” even though there were flows in the pipe. This meter will be left in place and the back-up transducer will be used in the future. A Sontek IQ Pipe has been installed to obtain flow measurements in the auxiliary water supply.

All of the instruments can suffer from inaccuracies from time to time. The inaccuracies can be caused by clogging of bubbler lines, electronic creep, debris accumulating on sensors, changes to the measured cross sections, human interactions and equipment problems. For this reason, the data is verified against field measurements and observations. The information gathered from each of these locations has been reduced to the mean daily flows in cfs (Appendix 7). From January 27 through February 11, 2015, the computer that operates the SCADA facility software malfunctioned due to an undetermined reason and no data for the fishway was recorded for that period of time. The mean daily Robles Fish Facility discharge and corresponding turbidity and temperature measurements for the entire Fish Passage Season are presented in Appendix 8.

Surface flow over the measurement weir was first observed from December 2, 2014 through December 4, 2014. Surface flow began again on December 12, 2014 and continued over the weir until March 10, 2015 and remained dry for the remainder of the fish passage season. No BO-defined peak flow events occurred during the 2015 fish passage season.

Water diversions occurred over a 25-hour period beginning at around 11:00 a.m. on December 12, 2015 with peak inflow measured at 99 cfs. During diversion, the facility was operated under the historical Trial Operating Criteria as defined in the BO. No further surface diversions occurred during the 2014-2015 season (to date).

### 6.1.3 Costs Associated with Operation and Monitoring

The BA/BO specified that the District provide the costs that are associated with the activity. The following is a summary of the direct costs incurred by the District during the 2014-15 fiscal year:

- **Fisheries Monitoring:**

Salaries & Benefits	\$394,385
Equipment/Material	<u>\$ 14,522</u>
	\$408,907
  
- **Facility Operations:**

Salaries & Benefits	\$ 30,493
Equipment/Materials	\$ 5,277
Outside Contracts	\$ 0
Utilities	\$ 1,492
Permit	<u>\$ 565</u>
	\$37,827
  
- **Capital Improvements:**

Two Sontek IQ flowmeters were installed at the facilities using Casitas personnel. The cost of the installation is included above.

### 6.1.4 Water Velocity and Depth Validation Evaluation

Casitas entered into an agreement with HydroScientific West to complete the first phase of the performance (hydraulic) testing. Performance testing of the fish screen was completed March 25, 2011.

Because of inadequate flows, no additional performance testing was completed during the 2014-2015 season. Casitas priorities for 2015-2016 season include completing flow measurements in the spillway-entrance box channel (per NMFS request) and completing flow measurements at the auxiliary water screen in the entrance box. Both of these measurements require flows of 671 CFS for a minimum of 24 hours to complete.

Additionally, Casitas has purchased a Hach (Marsh-McBirney) FH 950 flow meter to assist in obtaining flow measurements in the fish ladder under the criteria specified in the Performance Evaluation Program. These measurements can be completed under moderate flow conditions.

All performance testing will be completed in general accordance with the NMFS approved Performance Evaluation Program and Biological Committee recommendations.

#### 6.1.5 Recommendations Regarding the Prioritization of Future Activities

The District has completed its tenth season with the Robles Fish Facility operational. Several projects have been identified to improve the functionality and reliability of the system. Other items require repairs. The summer and fall work list for 2015 included:

- Modify the differential level sensors at the fish ladder entrance to individually read water levels or install an additional level sensor.
- Design and submit for approval an alternate diffuser design for the fish screens and the auxiliary water supply.

#### 6.1.6 Recommendations Deemed Necessary to the Operations

Casitas continues to recommend that the construction of the 15-weir portion of the project be put on hold at least until the Matilija Dam Removal Project is completed. Preliminary plans for the High Flow Sediment Bypass and High Flow Fish Passage portion of the Matilija Dam Removal Project require this area to be graded to new elevations. The existing temporary weir system has proven to be passable by adult *O. mykiss*.

Casitas will be submitting to USBR a recommendation for modification to the diffuser panels behind the fish screens and at the auxiliary flow exit.

## 6.2 Fish Passage Monitoring

### Introduction

Monitoring of migratory fish moving through fish passage facilities has been conducted using many different methods that include: visual counting, trapping and hand counting, continuous video recording, PIT tagging, radio telemetry, and acoustical telemetry. In each fish passage application, the particular physical and biological conditions (e.g., variable discharge, turbidity, debris, size of facility, and number of fish) usually dictate which method would be most effective. New technologies have been employed to improve fish passage monitoring in turbid conditions specifically. One such monitoring device is the Vaki Riverwatcher<sup>®</sup> (Riverwatcher). The Riverwatcher has the capability to operate in greater turbidity than more traditional monitoring equipment. Because of this advertised capability, the Riverwatcher was selected to be used in the Robles Fish Facility by the Technical Advisory Group during original facility design.

The primary objective of fish passage monitoring is to provide a long-term index of the number of upstream adults and downstream kelts migrating through the Robles Fish Facility (NMFS 2003a). The Riverwatcher has the ability to detect smolt-sized steelhead, but it's recommended for fish body depths  $\geq 40$  mm by the manufacturer (Vaki 2003). Consequently, it was not known how well it would work at detecting smolt-sized fish given the debris load of the Ventura River (NMFS 2003a).

### Methods

Fish migrating upstream and downstream through the Robles Fish Facility were monitored using the Riverwatcher. The Riverwatcher is located in the fish bypass channel, which is the channel between the fish ladder and fish screens. The Riverwatcher consists of two scanner plates with light diodes that transmit beams of infrared light through the water to a corresponding receiver plate. When a fish swims (or debris drifts) through the infrared light beams, it breaks the light signal and a digital



silhouette of the fish is recorded on a computer. Other data recorded when the Riverwatcher scanner is triggered are: date and time, total length (TL) of the fish (from a length/height ratio), swimming speed (m/sec), and direction of the fish movement (upstream or downstream). In addition, the scanner triggers an underwater camera to record a 10-second video clip (25 frames/sec). Only fish swimming upstream can be recorded in the Riverwatcher computer video system because it was designed for one camera, and that camera was placed on the upstream side of the scanner. An additional two cameras were installed in 2008-09 so that video of fish moving downstream could be captured on a digital video recorder (DVR). Both downstream cameras are located upstream of the Riverwatcher scanners in an aluminum tunnel along with the upstream Riverwatcher camera. The downstream digital cameras recorded continuously at 12 frames/sec and captured about 4-5 weeks of data until the DVR data storage drive was full (each week of data required up to approximately 4 h to review Riverwatcher detections). These two downstream cameras are independent of the Riverwatcher system and have to be reviewed separately for downstream detections. Once the DVR memory is full, it is exchanged with a second DVR and the data are reviewed before the DVRs have to be exchanged again.

The Riverwatcher scanner and cameras are positioned at the bottom of an aluminum frame (crowder) covered with 1/2 inch aluminum bars, spaced 1 1/2 inches on center resulting in 1-inch spacing between the bars, which directs the fish to swim between the scanner plates. The crowder can be raised and lowered in guide slots of the fish bypass channel with the aid of an A-frame hoist for cleaning or repair. The Riverwatcher is usually operated during the entire flow augmentation season as long as sufficient water elevations in the fish bypass are present and debris and turbidity are low enough so that the crowder will not be damaged and the Riverwatcher will function. The Riverwatcher was operated from 03 December 2014 to 14 April 2015 of the reporting period. During this fish passage season, the crowder was removed from the fish bypass channel and cleaned or inspected 16 times. Typically, during times of higher debris, the cleaning and inspections occur multiple times per day, and at times of low debris, cleaning and inspections occur only once every 2-3 days. At times of very low flow (< 1-2 cfs), the

crowder may only be cleaned once per week. The crowder was removed for cleaning for a combined total of approximately 4 h during the operation period. The Riverwatcher was operated a total of 104 days, which was 98.8% of the time any surface water was in the Robles Fish Facility during the fish augmentation period. During the fish augmentation season, flow through the fish bypass channel was greater than 10 cfs for only 16 hours and the Riverwatcher operated 100% of the time. There were technical problems with the Riverwatcher video malfunctioning that resulted in the loss of video clips for upstream detections. As a result, the DVR system had to be used exclusively for detections when a Riverwatcher video clip was not available. The Riverwatcher system will be repaired prior to the start of the 2016 operation season.

Prior to 2010, each upstream and downstream Riverwatcher detection was reviewed and classified as either: an adult steelhead, *O. mykiss* non-adult steelhead, other species if identifiable, unknown fish, fish probable, or false detection (see Appendix 9 for detection classification flow chart). At the request of NMFS, this classification system was modified during the review process of the 2010 progress report. All confirmed *O. mykiss* were classified solely as *O. mykiss*. The classifications were determined by using a combination of the silhouette images, estimated lengths, and video clips. In addition, if larger adult sized *O. mykiss* were detected and a useful video clip was recorded, measurements of eye diameter and standard length (SL) were estimated from the video clip to calculate morphometric ratios that were compared to known steelhead and rainbow trout. A commonly used morphological method to discriminate differences is to develop ratios of body measurements for comparison to remove the effects of body size (Strauss and Bond 1990). This is done by comparing SL to the ratio of eye diameter in linear regression. Standard length is the length from the snout to the end of the hypural plate near the end of the fleshy caudal peduncle, which is unaffected by caudal fin deformities (Anderson and Neumann 1996). Before 2010, the adult steelhead classification was used if the fish observed was an *O. mykiss* and displayed the typical characteristics of an anadromous adult steelhead, such as black spotting on dorsal, adipose, and caudal fins, black spotting on dorsal side of body, silvery body, vertical edge to caudal fin,  $\geq 38$  cm TL (Shapovalov and Taft 1954), and

had an eye diameter/SL ratio  $\leq 0.045$  (CMWD 2008). The new classification method may include juvenile resident, smolts, adult resident, and adult anadromous *O. mykiss* migrating throughout the basin. Conceivably, after more data are collected from the downstream trapping component, or from other Ventura River basin research projects, a more thorough classification system of Riverwatcher detections could be used again.

The “fish unknown” classification was used if a detection was identified to be a fish based on video evidence, but further classification could not be determined due to high turbidity or an inadequate amount of the fish captured within the camera’s field of view. The “fish probable” classification was used if no fish was observed in the video, but the silhouette was similar to that of a typical fish silhouette confirmed by video evidence. Even with reasonably good video coverage, smaller fish are still able to pass through the Riverwatcher undetected by the video cameras. This occurs if fish swim very close, high, or low relative to the cameras. In addition, this can happen if a fish swims upstream through the scanners but stops before entering the video field of view. High turbidity can also obscure the video detection and identification of fish. The “false detection” classification was used when no fish was observed in the video and the silhouette was not similar to that of a typical fish silhouette. Because false detections tended to occur frequently during higher discharges, when turbidity and debris also were high, it was likely that most false detections during these periods are caused by debris, high turbidity, and water turbulence. A third video camera was added for the 2014 season directed at the Riverwatcher scanner plates to help determine the cause of many of the false detections. After reviewing selected times where many assumed false detections occurred, it was concluded that debris, air bubbles, and turbulence were indeed the source of the detections. During low-flow periods (<10 cfs), which was about half of the time the Riverwatcher was operating, surface water turbulence was likely the cause of most false detections. When turbidity exceeds about 100 NTUs, hundreds of false detections can occur per hour due to high concentration of suspended solids breaking the infrared beams of the scanner plates. When turbidity is less than about 100 NTUs, false detections from suspended solids are not typical, but poor camera visibility does not always allow for video confirmation, depending on how close

to the camera that a fish swims during passage. Once the turbidity falls below about 25-30 NTUs, turbidity does not limit the Riverwatcher’s capability for detecting and confirming fish (Table 1).

Table 1. Riverwatcher general operational status for ranges of water turbidity (NTUs).

Approximate Turbidity (NTUs)	Riverwatcher status
> 200	Not functional
100-200	Many false scanner detections, not fully functional
30-100	Scanner functional, but unable to confirm with video
< 30	Scanner functional, grid detectable for video confirmation

Results

During the 2015 fish migration season, the Riverwatcher did not record any fish detections. Only false detections were recorded, of which 29 were upstream and 40 were downstream (Appendix 10).

Discussion

There were 69 false detections recorded by the Riverwatcher. All detections were assumed to be false detections from debris, turbulence, air bubbles, and settings of the Riverwatcher to detect smaller fish. The review of the third camera directed at the Riverwatcher scanner plates provides confidence that these are the likely causes of the false detections. None of the detections produced silhouettes that appeared to be fish based on previous experience operating the Riverwatcher. In the event that one of these silhouettes could have been caused by a fish, all upstream detection video clips were reviewed and no fish were observed and a 25% subsample of downstream video clips was reviewed and no fish were observed. For the 2015 season, the minimum height remained at 28 mm so that a large number of false detections could be eliminated while still attempting to detect steelhead smolts. Based on available data from the Ventura Basin, a height of 28 mm was determined to be similar to some of the

smallest steelhead smolts expected to emigrate downstream through the Robles Fish Facility. This height corresponds to 146 mm TL and 139 mm FL. The estimated fish detection rate from a Riverwatcher verification study indicated that up to 93% of smolt sized *O. mykiss* will not be detected by the Riverwatcher (Lewis et al. 2015).

Additionally, it was concluded that larger-sized fish (i.e., height > 80 mm) appeared to be detected nearly 100% of the time. This height is equal to about 475 mm TL.

Shapovalov and Taft's (1954) 9-year study documented only 4% of the total number of adult steelhead were smaller than 475 mm. Therefore, the number of small adult steelhead that may not be detected would likely be low. However, the vast majority of adult steelhead would be detected.

## 7.0 ADDITIONAL BIOLOGICAL AND ENVIRONMENTAL MONITORING STUDIES

### 7.1 *O. mykiss* Presence/Absence Surveys

#### Methods

In addition to the fish attraction monitoring, *O. mykiss* presence/absence surveys were conducted in the Ventura River mainstem between the Robles Fish Facility and the Ventura River mouth and San Antonio Creek. Surveys were conducted upstream of the Robles Fish Facility in Matilija and North Fork Matilija creeks. These additional sites were surveyed using both bank and snorkeling methods (depending on water conditions and expected life history stage) but were conducted primarily after storm events for adults and during the rest of the year for smolts, parr, and fry. Methods to estimate fish size and numbers were the same as those used in the fish attraction evaluation. A total of 14 sites were monitored and both pool and riffle habitat at each site were included (Appendix 11). These additional areas were surveyed to determine if adult steelhead were entering the Ventura River, migrating upstream, holding and spawning, and if they were successfully passing through the Robles Fish Facility. Also, juvenile *O. mykiss* (smolts and residents) were surveyed to learn spatial and temporal patterns.

The sites were initially selected based on ease of access, coverage of basin, and presumed chance of detecting *O. mykiss*. However, after all habitat surveys were completed, site selection was also based on quantitative measurements identifying high-quality habitats used for *O. mykiss* juvenile rearing and adult holding.

## Results

Peak snorkel counts within each year have generally been between 350 and 400 *O. mykiss* until 2013. Due to the exceptional drought in its fourth year, the peak numbers of *O. mykiss* have dropped substantially (Appendix 12). The peak count of *O. mykiss* was 65 during 2015 and largely due to fry observed after adding an additional unit in San Antonio Creek. This was, however, an increase in peak snorkel count of only 14 *O. mykiss* in 2014 (Appendix 12).

### 7.2 *O. mykiss* Index Spawning Surveys

## Methods

Spawning surveys were conducted throughout the Ventura Basin that is accessible to adult steelhead and only resident rainbow upstream of Matilija Dam. A total of 21 index sites or reaches were subjectively selected (Appendix 13) with small to medium size gravel that are suitable for steelhead spawning (Shapovalov and Taft 1954; Orcutt et al. 1968). During 2008, the spawning index sites selected were initially distributed broadly within the basin to capture general spawning locations and timing. Since 2008, longer reaches have been added to incorporate and replace previously surveyed discrete sites to accommodate for spawning gravel redistribution after storm events. Additional sites have been added to capture quality spawning habitat and to be more representative of each surveyed sub-basin. This initial information will be used to establish long-term index sites to capture population trends. The spawning surveys were conducted biweekly from January through June, or until no further spawning was observed, and observations were made at sites to identify and count *O. mykiss* redds; redds were

identified by typical characteristics (Orcutt et al. 1968; Chapman 1988). Once a redd was identified, physical measurements similar to those recorded by Zimmerman and Reeves (2000) were collected to characterize the redd. The physical measurements were only recorded during the first three years because it was felt sufficient data was collected to characterize redds. Currently, only larger redds (likely anadromous) have all measurements collected. Pit and tailspill lengths were measured from the upstream end to the downstream end of each, respectively. Redd width was measured at the widest point of the tailspill (Appendix 14). Water depth was measured at four locations: in the pit, adjacent to the pit, upstream of the pit, and at the tailspill. The surface median ( $D_{50}$ ) and maximum substrate size of each redd tailspill was estimated. All adjacent measurements were taken on the thalweg side of each redd. Photos and GPS locations were also recorded for all redds identified. This information will help determine steelhead spawning habitat selection characteristics.

## Results

Spawning surveys started in 2008, numbers initially increased from only 3 redds to a high of 165 redds in 2012. Over the last 4 years, as the current drought intensified, the available habitat diminished, causing dramatic losses to the adult and juvenile *O. mykiss* populations resulting in significantly lower redd counts. In 2015, the total redd count was 20 redds (Appendix 15).

### *7.3 Ambient Water Quality Monitoring*

In order to fully evaluate several aspects of the monitoring and evaluation program, water quality data is collected throughout the Ventura River basin (Appendix 16). Water temperatures are recorded at 12 locations throughout the Ventura River basin. The locations include the Ventura River estuary and mainstem, Coyote Creek, San Antonio Creek, North Fork Matilija Creek, and Matilija Creek upstream and downstream of Matilija Dam. The loggers record at 30-min intervals. Monthly grab samples are also collected at the same locations with a multiprobe that record: dissolved oxygen, pH,

conductivity, salinity, TDS, and temperature. A monthly water quality profile is also collected in the estuary/lagoon. The profiles are collected at approximately the mid-point of the estuary/lagoon and at least four depths are recorded. A continuous turbidity probe is also installed in the Robles Fish Facility near the Riverwatcher. It records water turbidity at 1-hr intervals when the bypass is operational. Turbidity measurements are also collected at several sites upstream, downstream, and within the Robles Fish Facility to ensure the continuous probe is located in a position that will be representative of the turbidity in the Ventura River. All locations are monitored if sufficient water was present. Given the current drought, many of the monitoring sites were dry. A weather station has been installed at the Robles Fish Facility to collect various atmospheric data including rainfall, temperature, pressure, wind, humidity, and dew point (Appendix 17).

#### *7.4 Estuary/Lagoon Monitoring*

The sandbar is monitored during the fish passage season to determine if it is open. If open, Robles Fish Facility operating criteria must be met per the BO. Outside of the passage season, monitoring has been conducted and expanded to better understand the nature of the Ventura River sandbar and how it may affect fish passage year round, and also potential rearing capacity. The estuary/lagoon has been monitored monthly for water depth as part of the water quality monitoring. In addition, the surface area has been measured every 6 months. Together, these physical measurements can provide some general index of relative rearing capacity of the Ventura River estuary/lagoon over time. From 2008 through 2011, which were wetter years, the sandbar status and estuary/lagoon depth and size varied with conditions. However, since the beginning of the current drought in 2012, conditions have remained somewhat comparable (Appendix 18).

#### *7.5 Surface Flow Monitoring*

The Ventura River, like most rivers in southern California, have significant reaches that lose surface flow during most years after storm flows recede. To quantify this natural



pattern, surface flows have been observed and documented beginning at the end of 2007. Like the sandbar monitoring, clear patterns have become apparent. During normal precipitation years, there are typically surface flows throughout the length of the Ventura River mainstem during the fish passage season. Even during normal years, the Robles Reach goes dry shortly after storms occur. However, beginning with the current drought, the Robles Reach has been dry for extensive periods of time, even extending downstream of the San Antonio Creek confluence (Appendix 19).

### *7.6 Photographic Index Sites*

Photographic index sites were established throughout the Ventura River basin in 2007 to monitor general changes of the stream channel morphology, water conditions, and riparian zones. There are a total of 14 sites where an upstream and downstream photo are taken (Appendix 20). The sites are re-visited twice per year, during March and September. As a representation of the general patterns within the mainstem of the Ventura River, Appendix 21 shows the general trend that has been observed of increasing riparian and within channel vegetation over time since the 2008 channel clearing storm.

### *7.7 Underwater Video Monitoring*

As time allowed, a pilot study of an underwater video monitoring system was continued to determine if remote monitoring for adults or smolts is feasible within the Ventura River or tributaries. The monitoring system was placed at selected locations when water conditions were suitable to record fish rearing, holding, or migrating. The system consisted of an underwater video camera attached to a DVR that can record for 6-8 hours at a time. The system was powered by a 12 volt DC battery so the system could be placed anywhere within the basin. The video was reviewed to determine presence or absence and relative numbers of steelhead, if present. If this pilot study is successful, it may be expanded and developed into a more quantitative monitoring tool. This is the same system that was used at the fish ladder entrance during post-storm

observations. Underwater video monitoring was not conducted during the 2015 fish passage season.

### *7.8 Stranding Surveys*

No stranding surveys were conducted due to dry river conditions during the reporting period.

## 8.0 LITERATURE CITED AND BIBLIOGRAPHY

- Adams, N. S., D. W. Rondorf, S. D. Evans, and J. E. Kelly. 1998. Effects of surgically and gastrically implanted radio transmitters on growth and feeding behavior of juvenile Chinook salmon. *Transaction of the American Fisheries Society*, 127:128-136.
- Anderson, R. O., and R. M. Neumann. 1996. Length, weight, and associated structural indices. Pages 477-482 in B. R. Murphy and D. W. Willis, editors. *Fisheries techniques*, 2nd edition. American Fisheries Society, Bethesda, Maryland.
- Ando, D., T. Kitamura, and S. Mizuno. 2005. Quantitative analysis of body silvering during smoltification in masu salmon using chromameter. *North American Journal of Aquaculture*, 67:160-166.
- Banks, J. W. 1969. A review of the literature on the upstream migration of adult salmonids. *Journal of Fish Biology*, 1:85-136.
- Beeman, J. W., and A. G. Maule. 2001. Residence time and diel passage distribution of radio-tagged juvenile spring Chinook salmon and steelhead in a gatewell and fish collection channel of a Columbia River dam. *North American Journal of Fisheries Management*, 21:455-463.
- Beeman, J. W., D. W. Rondorf, M. E. Tilson, and D. A. Venditti. 1995. A nonlethal measure of smolt status of juvenile steelhead based on body morphology. *Transactions of the American Fisheries Society* 124:764-769.
- Behnke, R. J. 1992. Native trout of western North America. *American Fisheries Society Monograph* 6.
- Bond, M. H., A. A. Hayes, G. V. Hanson, and R. B. MacFarlane. 2008. Marine survival of steelhead (*Oncorhynchus mykiss*) enhanced by a seasonally closed estuary. *Canadian Journal of Fisheries and Aquatic Sciences*, 65: 2242-2252.
- Bratovich, P. M., and D. W. Kelley. 1988. Investigation of salmon and steelhead in Lagunitas Creek, Marin County, California. Volume 1. Migration, spawning, embryo incubation and emergence, juvenile rearing, emigration. Marin Municipal Water District. Corte Madera, California.
- Brown, R. S., S. J. Cooke, W. G. Anderson, and R. S. McKinley. 1999. Evidence to challenge the "2% rule" for biotelemetry. *North American Journal of Fisheries Management*, 19:867-871.

- Busby, P. B., T. C. Wainwright, G. J. Bryant, L. J. Lierheimer, R. S. Waples, F. W. Waknitz, and Lagomarsino. 1996. Status review of west coast steelhead from Washington, Idaho, Oregon, and California. National Marine Fisheries Service. NOAA technical memorandum NMFS-NWFSC-27, August 1996.
- Cannata, S. T. 1998. Observations of steelhead trout (*Oncorhynchus mykiss*), coho salmon (*O. kisutch*) and water quality of the Navarro River estuary/lagoon, May 1996 to December 1997. Draft report, Humboldt State University Foundation. Humboldt, CA.
- Chapman, D. W. 1988. Critical review of variables used to define effects of fines in redds of large salmonids. Transactions of the American Fisheries Society 117(1):1-21.
- Chrisp, E. Y., and T. C. Bjornn. 1978. parr-smolt transformations and seaward migration of wild and hatchery steelhead trout in Idaho. Idaho Cooperative Fishery Research Unit, University of Idaho, Moscow, Idaho. Final project report F-49-R.
- Clay, H. C. 1995. Design of fishways and other fish facilities, 2<sup>nd</sup> edition. CRC Press, Inc., Boca Raton, FL.
- Cooke, R. U., A. Warren, and A. S. Goudie. 1992. Desert geomorphology. UCL Press, London.
- CMWD. 2005. 2005 progress report for the Robles Diversion Fish Passage Facility. Casitas Municipal Water District, Oak View, CA.
- CMWD. 2006. 2006 progress report for the Robles Diversion Fish Passage Facility. Casitas Municipal Water District, Oak View, CA.
- CMWD. 2007. 2007 progress report for the Robles Diversion Fish Passage Facility. Casitas Municipal Water District, Oak View, CA.
- CMWD. 2008. 2008 progress report for the Robles Diversion Fish Passage Facility. Casitas Municipal Water District, Oak View, CA.
- CMWD. 2009. 2009 progress report for the Robles Diversion Fish Passage Facility. Casitas Municipal Water District, Oak View, CA.
- CMWD. 2010. 2010 progress report for the Robles Diversion Fish Passage Facility. Casitas Municipal Water District, Oak View, CA.
- CMWD. 2011. 2011 progress report for the Robles Diversion Fish Passage Facility. Casitas Municipal Water District, Oak View, CA.

- CMWD, Wood Rogers, and ENTRIX Inc. 2002. Preliminary draft technical memorandum of operation constraint assessment of the Robles Fish Passage Facility. Prepared for US Bureau of Reclamation.
- Dauble, D. D., T. L. Page, and W. Hanf. 1989. Spatial distribution of juvenile salmonids in the Hanford Reach, Columbia River. *Fishery Bulletin*, 87:775-790.
- Dettman, D. H., and D. W. Kelley. 1986. Assessment of the Carmel River steelhead resource, Volume 1. biological investigations. Monterey Peninsula Water Management District, Monterey, CA.
- ENTRIX. 1999. Evaluations of natural passage barriers on the Ventura River downstream of Robles Diversion. ENTRIX, Walnut Creek, CA.
- ENTRIX. 2000. Results of fish passage monitoring at the Vern Freeman diversion facility Santa Clara River, 1994-1998. ENTRIX, Walnut Creek, CA.
- Flosi, G., S. Downie, J. Hopelain, M. Bird, R. Coey, and B. Collins. 2002. California salmonid stream habitat restoration manual, Volume I, 3rd edition. California Department of Fish and Game. Inland Fisheries Division, Sacramento, CA.
- Hagar, J. 1996. Salinas River steelhead status and migration flow requirements. Monterey County Water Resources Agency. Salinas, California.
- Haner, P. V., J. C. Faler, R. M. Schrock, D. W. Rondorf, and A. G. Maule. 1995. Skin reflectance as a nonlethal measure of smoltification for juvenile salmonids. *North American Journal of Fisheries Management*, 15:814-822.
- Hockersmith, E. E., W. D. Muir, S. G. Smith, B. P. Sandford, N. S. Adams, J. M. Plumb, R. W. Perry, and D. W. Rondorf. 2000. Comparative performance of sham radio-tagged and PIT-tagged juvenile salmon. US Army Corps of Engineers, Walla Walla District.
- Harrison, L. R., E. A. Keller, E. Kelley, and L. A. K. Mertes. 2006. Minimum flow requirements for southern steelhead passage on the lower Santa Clara River, CA. University of California, Santa Barbara.
- Hasler, A. D., and A. T. Scholz. 1983. Olfactory imprinting and homing in salmon. Springer-Verlag, New York.
- Jepsen, N., L. E. Davis, C. B. Schreck, and B. Siddens. 2001. The physiological response of Chinook salmon smolts to two methods of radio-tagging. *Transactions of the American Fisheries Society* 130:495-500.
- Leopold, L. B., M. G. Wolman, and J. P. Miller. Fluvial processes in geomorphology. W. H. Freeman and Company, San Francisco.

- Lewis, S. D. 2001. Movements of hatchery steelhead smolts in Lake Billy Chinook and Squaw Creek during 2000. Portland General Electric. Portland, Oregon.
- Lewis, S. D. 2002. Movements of hatchery steelhead smolts in Lake Billy Chinook and Squaw Creek during 2001. Portland General Electric. Portland, Oregon.
- Lewis, S. D. 2003. Movements of hatchery steelhead smolts in Lake Billy Chinook and Squaw Creek during 2002. Portland General Electric. Portland, Oregon.
- Lewis, S. D., M. W. Gibson, and J. L. Switzer. 2010. Ventura River basin *Oncorhynchus mykiss irideus* monitoring, evaluation, and research: 2010 annual program report. Casitas Municipal Water District, Oak View, California.
- Lewis, S. D., M. W. Gibson, J. L. Switzer, and A. L. Bonsignori. 2015. Verification testing of the Robles Fish Facility Vaki Riverwatcher. Casitas Municipal Water District, Oak View, California.
- Lewis, S. D., M. W. Gibson, and J. L. Switzer. 2015. 2016 monitoring and evaluation study plan for the Robles Fish Passage Facility and related studies. Casitas Municipal Water District, Oak View, California.
- Matthews, K. R., and N. H. Berg. 1997. Rainbow trout responses to water temperature and dissolved oxygen stress in two southern California stream pools. *Journal of Fish Biology*, 50:50-67.
- Matthews, K. R., N. H. Berg, D. L. Azuma, and T. R. Lambert. 1994. Cool water formation and trout habitat use in a deep pool in the Sierra Nevada, California. *Transactions of the American Fisheries Society*, 123:549-564.
- Moore, K., K. Jones, and J. Dambacher. 2002. Methods for stream habitat surveys, Version 12.1. Oregon Department of Fish and Wildlife, Aquatic Inventories Project, Natural Production Program, Corvallis, OR.
- Mosley, M. P. 1982. Critical depths for passage in braided river, Canterbury, New Zealand. *New Zealand Journal of Marine and Freshwater Research*, Vol. 16:351-357.
- National Marine Fisheries Service. 1997. Endangered and Threatened Species: Listing of Several Evolutionary Significant Units (ESUs) of West Coast Steelhead. Federal Register, 50 CFR Parts 222 and 227 [Docket No. 960730210-7193-02; I.D. 050294D] RIN 0648-XX65. Vol. 62, page 43937.
- National Marine Fisheries Service. 2003a. Biological opinion for the Robles diversion fish passage facility, Ventura River, CA. Protected Resource Division, Southwest Region, March 31, 2003.

National Marine Fisheries Service. 2003b. Endangered and Threatened Species: Range Extension for Endangered Steelhead in Southern California. Federal Register, 50 CFR Part 224 [Docket No. 001025296-2079-02; I.D. 072600A] RIN 0648-AO05. Vol. 67 page 21586.

National Marine Fisheries Service. 2005. Endangered and Threatened Species: Request for Comment on Alternative Approach to Delineating 10 Evolutionarily Significant Units of West Coast *Oncorhynchus mykiss*. 50 CFR Parts 223 and 224 [Docket No. 040525161-5274-05; I.D. No. 052104F] RIN No. 0648-AR93. Vol. 70 page 67130.

National Marine Fisheries Service. 2009. Letter addressed to Scott Lewis (Casitas Municipal Water District) addressing the downstream fish passage evaluation. Letter dated 28 April 2009, SWR/2002/1871:SCG.

Orcutt, D. R., B. R. Pulliam, and A. Arp. 1968. Characteristics of steelhead trout redds in Idaho streams. Bureau of Commercial Fisheries, Boise, Idaho.

Odeh, M. 2000. Advances in fish passage technology: engineering design and biological evaluation. American Fisheries Society, Bethesda, Maryland.

Quinn, T. H. 2005. The behavior and ecology of Pacific salmon and trout. American Fisheries Society, Bethesda, Maryland.

Scott, W. B. and E. J. Crossman. 1973. Freshwater fishes of Canada. Fisheries Research Board of Canada, Ottawa, Bulletin 184.

Shapovalov, L. and A. C. Taft. 1954. The life histories of the steelhead rainbow trout (*Salmogairdnerigairdneri*) and silver salmon (*Oncorhynchus kisutch*), with special reference to Waddell Creek, California, and recommendations regarding their management. State of California Department of Fish and Game, fish bulletin No. 98.

Spina, A. P., M. A. Allen, and M. Clarke. 2005. Downstream migration, rearing abundance, and pool habitat associations of juvenile steelhead in the lower main stem of a south-central California stream. North American Journal of Fisheries Management, 25:919-930.


Stoecker, M. 2010. North Fork Matilija Creek adult steelhead below Ojai Quarry barriers. Letter sent on 30 March 2010 about adult steelhead observations, 5 p.

Strauss, R. E., and C. E. Bond. 1990. Taxonomic methods: In Schreck C. B. and P. B. Moyle, editors. Methods for fish biology. AFS, Bethesda, Maryland.

- Summerfelt, R. C., and L. S. Smith.1990. Anesthesia, surgery, and related techniques. Pages 213-272 in C. B. Schreck and P. B. Moyle, editors. *Methods for Fish Biology*. American Fisheries Society, Bethesda, Maryland.
- SYRTAC (Santa Ynez River Technical Advisory Committee). 1999. Adult steelhead passage flow analysis for the Santa Ynez River. Santa Ynez River Consensus Committee, Santa Barbara, CA.
- SYRTAC (Santa Ynez River Technical Advisory Committee).2000. Lower Santa Ynez River fish management plan. SantaYnez River Consensus Committee, Santa Barbara, CA.
- Tan, S. S., and T. A. Jones.2006. Geologic map of the Matilija 7.5' quadrangle Ventura County, California: a digital database. Version 1.0, Los Angeles, CA.
- Thompson, K. 1972. Determining stream flows for fish life. Pacific Northwest River Basins Commission, instream flow requirements workshop. Portland, Oregon. Proceedings: 31-50.
- U.S. Bureau of Reclamation. 2003. Revised biological assessment for diversion operations and fish passage facilities at the Robles Diversion, Ventura River, CA. South-Central California Area Office, February 21, 2003.
- Vaki.2003. User manual for Riverwatcher. Vaki Aquaculture Systems Ltd., Iceland.
- Wagner, H. H., R. L. Wallace, and H. J. Campbell.1963. The seaward migration and return of hatchery-reared steelhead trout, *Salmo gairdneri* Richardson, in the Alsea River, Oregon. Transactions of the American Fisheries Society, 92(3):202-210.
- Zimmerman, C. E., and G. H. Reeves. 2000. Population structure of sympatric anadromous and nonanadromous *Oncorhynchus mykiss*: evidence from spawning survey and otolith microchemistry. Canadian Journal of Fisheries and Aquatic Sciences, 57:2152-2162.



## 9.0 APPENDICES

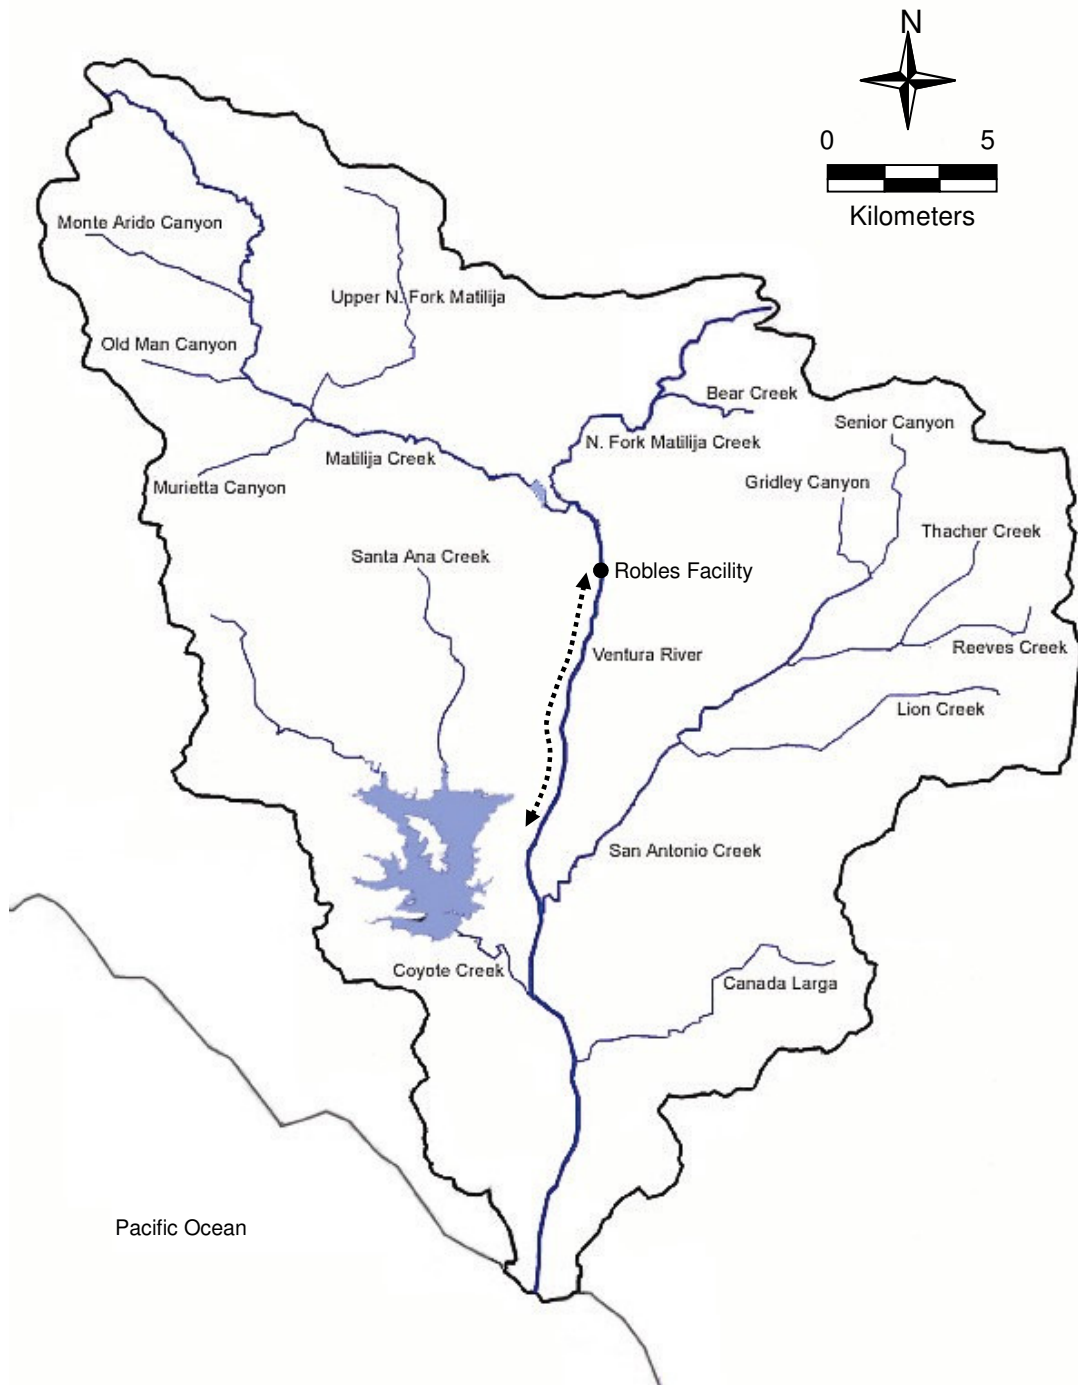

Appendix 1. Basin map of the Ventura River. The Robles Fish Passage Facility is identified by the black dot and the Robles Reach is identified by the dashed line downstream of the Robles Facility.

Appendix 2. Summary data of impediment sites selected for upstream fish migration impediment evaluations.

Site No.	Latitude (N)	Longitude (W)	km	Habitat Type <sup>a</sup>	Site Description	Length (m)	Slope (%)	Percent Substrate <sup>b</sup>						Active Channel Width (m)
								SO	SD	GR	CB	BD	BR	
10	34.365265°	119.311082°	11	RI	Near Casitas Springs at bottom of levy	38.2	1.0	0	0	10	70	20	0	44.5
3-2	34.373789°	119.308417°	12	RB	Near Casitas Springs at top of levy	22.0	3.7	10	5	10	65	10	0	27.0
4	34.384743°	119.310030°	14	RI	0.5 km upstream of San Antonio Cr. confluence	23.8	5.0	0	0	0	15	85	0	27.9
5-2	34.396095°	119.309537°	15	RI	0.4 km downstream of Santa Ana Blvd. bridge	8.4	7.0	0	5	5	45	45	0	50.6
6-2	34.411318°	119.301491°	17	CB	1.4 km upstream of Santa Ana Blvd. bridge	26.1	5.0	0	0	0	65	35	0	33.8
9	34.426708°	119.301831°	19	RI	0.2 km upstream of Hwy 150 bridge	67.9	1.5	0	0	0	30	70	0	32.4
7	34.438184°	119.299528°	20	RB	1.1 km upstream of Hwy 150 bridge	31.6	2.0	5	0	10	40	45	0	65.9

<sup>a</sup>The habitat types are: RB = rapid with protruding boulders, RI = riffle, and CB = cascade over boulders.

<sup>b</sup>The substrate types are: SO = silt and organics, SD = sand, GR = gravel, CB = cobble, BD = boulders, and BR = bedrock.

Appendix 3. Completed transects at impediment sites for ramp down target discharges from the Robles Fish Facility through 2015.

Robles Discharge (cfs)	Impediment Sites						
	3-2	4	5-2	6-2	7	9	10
171	x						
100		x			x		
82	x	x			x	x	x
74		x	x, x	x, x	x		
68	x				x		
62		x, x, x, x	x	x			
56	x		x	x			dry
50		x	x		x, x	x	
40	x	x, x, x	x, x	x	x, x, x	x	
30	x	x, x	x	x	x, x, x	x	
20		x					


Completed transects rounded to nearest Robles discharge (e.g., the four transects measured at site 4 ranged from 61-63 cfs) based on a 2 rkm/hr lag time and averaging hourly discharge of released water from Robles. Colors correspond to year of survey: x = 2010, x = 2011, x = 2014.

Appendix 4. Ventura River sandbar monitoring data from July 2014 through June 2015.

Date	Sandbar Breached (Y/N)	Time (24h)	Tide Height (ft)	Tidal State	High Tide		Low Tide		Mean Daily Discharge at Foster <sup>a</sup> (cfs)	Mean Daily Discharge at Robles (cfs)	Notes
					Time (24h)	Height (ft)	Time (24h)	Height (ft)			
07/16/2014	N	10:55	3.87	ebb	9:58	4.08	14:58	1.72	0.4	0	If breached, west bank
08/15/2014	N	10:15	2.80	flood	13:48	5.32	7:22	1.01	0.1	0	If breached, west bank
08/28/2014	N <sup>b</sup>	11:40	4.85	slack	11:37	4.85	17:50	1.38	0	0	If breached, west bank
09/25/2014	N	9:35	5.19	flood	10:24	5.39	4:20	1.06	0	0	If breached, west bank
10/17/2014	N	10:00	3.28	ebb	7:00	4.29	12:43	2.45	0.1	0	If breached, west bank
11/06/2014	N	10:00	5.40	ebb	8:10	6.61	15:07	-0.75	0	0	If breached, west bank
11/18/2014	N	9:45	3.10	ebb	8:10	6.61	13:13	0.83	0	0	If breached, west bank
12/12/2014	Y	16:50	1.95	ebb	12:17	4.01	19:42	0.90	0.1	18	Open, west bank
01/02/2015	Y	13:00	-0.21	ebb	6:12	0.29	14:18	-0.72	0	3	Open, west bank
01/08/2015	Y	17:00	0.09	ebb	10:26	5.05	17:34	0.02	0	2	Open, west bank
01/21/2015	N <sup>b</sup>	8:20	6.17	flood	9:19	6.54	3:15	1.25	0	2	Open, west bank
02/02/2015	N	10:30	4.07	ebb	8:04	5.71	15:10	-0.68	0	2	If breached, west bank
02/18/2015	N	11:10	3.77	ebb	8:26	6.40	15:17	-1.39	1.4	<1	If breached, west bank
03/04/2015	N	9:05	5:04	ebb	8:24	5.18	15:05	-0.20	2.3	<1	If breached, west bank
03/20/2015	N <sup>b</sup>	9:05	5.26	flood	10:04	5.66	4:03	-0.27	2.5	0	If breached, west bank
03/31/2015	N <sup>b</sup>	8:45	5.35	ebb	8:21	5.41	14:51	-0.59	2.6	0	If breached, west bank
04/15/2015	N <sup>b</sup>	9:00	4.25	ebb	7:26	4.91	13:56	-0.29	3.0	0	If breached, west bank
05/01/2015	N <sup>b</sup>	15:30	1.15	flood	20:49	5.16	14:41	0.97	2.3	0	If breached, west bank
05/15/2015	N	11:13	2.34	ebb	8:15	4.31	14:02	0.56	1.80	0	If breached, west bank
05/27/2015	N	10:45	1.47	ebb	6:01	3.29	5:07	1.21	2.7	0	If breached, west bank
06/17/2015	N	10:00	3.40	flood	11:31	3.99	5:07	-1.07	3.1	0	If breached, west bank
06/30/2015	N	10:16	3.66	ebb	9:47	3.71	14:37	1.97	1.3	0	If breached, west bank

<sup>a</sup>USGS gauging station number 11118500, downstream of Foster Park.

<sup>b</sup>Sandbar was closed at low tide, but intermittent saltwater intrusions occurred overtopping the sandbar during some high tides.

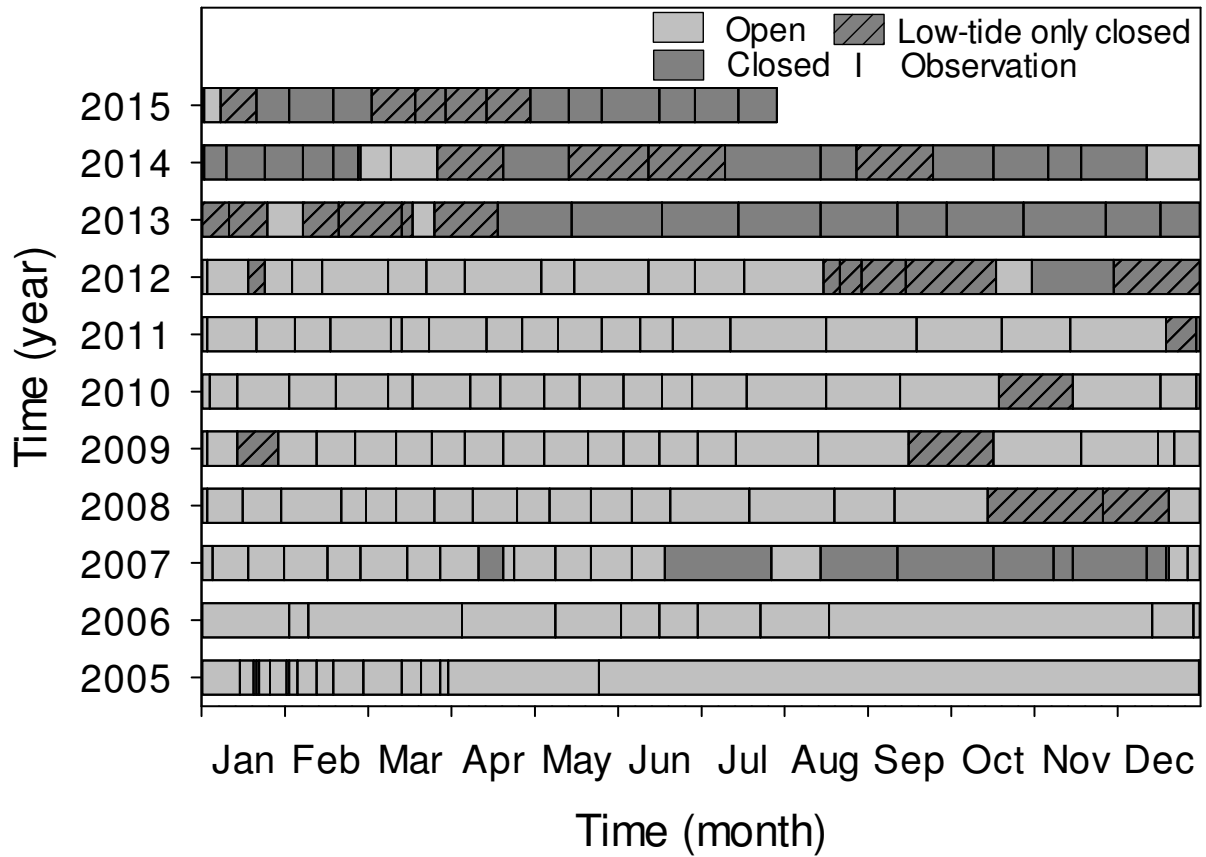

Appendix 5. Sandbar status at the mouth of the Ventura River from 2005 through July of 2015. Each observation is indicated by vertical lines and the sandbar status was assumed to remain the same until the next observation.

Appendix 6. Weekly fish attraction counts at the Robles Fish Facility during 2015.

Date	Method	Direction	Length (m)	Temp. (°C)	Turbidity (NTU)	Robles Mean Discharge (cfs)	Species <sup>a</sup>	Count
01/08/2015	Bank	Downstream	200	14	1	1	NFO	0
01/08/2015	Bank	Upstream	140	14	1	1	NFO	0
01/14/2015	Snorkel	Downstream	200	11	1	5	NFO	0
01/14/2015	Snorkel	Upstream	140	11	1	5	NFO	0
01/21/2015	Bank	Downstream	200	12	1	3	NFO	0
01/21/2015	Bank	Upstream	140	12	1	3	NFO	0
01/28/2015	Bank	Downstream	200	15	1	3	NFO	0
01/28/2015	Bank	Upstream	140	15	1	3	NFO	0
02/05/2015	Bank	Downstream	200	16	-	1	NFO	0
02/05/2015	Bank	Upstream	140	16	-	1	NFO	0
02/12/2015	Snorkel	Downstream	200	12	2	1	NFO	0
02/12/2015	Snorkel	Upstream	140	12	2	<1	NFO	0
02/19/2015 <sup>b</sup>	Snorkel	Downstream	140	17	1	<1	NFO	0
02/19/2015	Snorkel	Upstream	140	17	1	<1	NFO	0
02/26/2015 <sup>b</sup>	Bank	Downstream	140	14	1	<1	NFO	0
02/26/2015	Bank	Upstream	140	14	1	<1	NFO	0
03/04/2015 <sup>b</sup>	Snorkel	Downstream	140	14	1	<1	NFO	0
03/04/2015	Snorkel	Upstream	140	14	1	<1	NFO	0
03/11/2015 <sup>b</sup>	Bank	Downstream	40	16	1	0	NFO	0
03/11/2015	Bank	Upstream	140	16	1	0	NFO	0
03/19/2015 <sup>b</sup>	Snorkel	Downstream	40	15	2	0	NFO	0
03/19/2015	Snorkel	Upstream	140	15	2	0	NFO	0
03/27/2015 <sup>b</sup>	Bank	Downstream	40	19	-	0	NFO	0
03/27/2015 <sup>b</sup>	Bank	Upstream	100	19	-	0	NFO	0
		Upstream	1,640 m				Upstream	0
		Downstream	1,740 m				Downstream	0
		Total	3,380 m				Total	0

<sup>a</sup>OMY = *O. mykiss* and NFO = no fish observed.

<sup>b</sup>Partial survey due to dry habitat unit.

## Ventura River Flow Assessment

Appendix 7. Monthly flow summary for Robles Fish Facility, reporting year 2014-2015.

	(1)	(2)	(1) + (2)	B.O. Required Flow Release (cfs)	(3)	(4)	(5)	(4) + (5)
	Source Stream Mean Daily Flows				Robles Facility Mean Daily Flows			
	Matilija Ck D/S Dam (cfs)	North Fork Matilija Ck.* (cfs)	Sum of Creek Flows (cfs)		Fishway Ladder (cfs)	VRNMO Weir (cfs)	Diversion Canal (cfs)	Total Inflow (cfs)
<b>Jul-14</b>								
1	2.0	0.3	2.3	20	0	0	0	0
2	2.0	0.3	2.3	20	0	0	0	0
3	1.9	0.2	2.2	20	0	0	0	0
4	1.9	0.2	2.1	20	0	0	0	0
5	1.9	0.2	2.1	20	0	0	0	0
6	1.8	0.2	2.0	20	0	0	0	0
7	1.7	0.2	1.9	20	0	0	0	0
8	1.7	0.2	1.9	20	0	0	0	0
9	1.7	0.2	1.9	20	0	0	0	0
10	1.6	0.2	1.8	20	0	0	0	0
11	1.6	0.2	1.8	20	0	0	0	0
12	1.6	0.2	1.8	20	0	0	0	0
13	1.5	0.2	1.7	20	0	0	0	0
14	1.5	0.2	1.7	20	0	0	0	0
15	1.5	0.2	1.7	20	0	0	0	0
16	1.5	0.2	1.7	20	0	0	0	0
17	1.3	0.2	1.5	20	0	0	0	0
18	1.3	0.2	1.5	20	0	0	0	0
19	1.3	0.2	1.5	20	0	0	0	0
20	1.3	0.2	1.5	20	0	0	0	0
21	1.2	0.2	1.4	20	0	0	0	0
22	1.2	0.2	1.4	20	0	0	0	0
23	1.2	0.2	1.4	20	0	0	0	0
24	1.1	0.2	1.3	20	0	0	0	0
25	1.1	0.2	1.3	20	0	0	0	0
26	1.1	0.2	1.3	20	0	0	0	0
27	1.0	0.2	1.2	20	0	0	0	0
28	1.0	0.2	1.2	20	0	0	0	0
29	1.0	0.2	1.2	20	0	0	0	0
30	1.0	0.2	1.2	20	0	0	0	0
31	0.9	0.2	1.1	20	0	0	0	0
<b>Totals</b>	<b>45</b>	<b>6</b>	<b>51</b>	<b>620</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>

\*Data are provisional and subject to revision (VCWPD)

Biofouling in bubbler line. Data interpolated between known gage heights.



	(1)	(2)	(1) + (2)	B.O. Required Flow Release (cfs)	(3)	(4)	(5)	(4) + (5)
	Source Stream Mean Daily Flows				Robles Facility Mean Daily Flows			
	Matilija Ck D/S Dam (cfs)	North Fork Matilija Ck.* (cfs)	Sum of Creek Flows (cfs)		Fishway Ladder (cfs)	VRNMO Weir (cfs)	Diversion Canal (cfs)	Total Inflow (cfs)
Aug-14								
1	0.9	0.2	1.1	20	0	0	0	0
2	0.9	0.2	1.1	20	0	0	0	0
3	0.8	0.2	1.0	20	0	0	0	0
4	0.8	0.2	1.0	20	0	0	0	0
5	0.8	0.2	1.0	20	0	0	0	0
6	0.7	0.2	0.9	20	0	0	0	0
7	0.7	0.2	0.9	20	0	0	0	0
8	0.7	0.2	0.9	20	0	0	0	0
9	0.7	0.2	0.9	20	0	0	0	0
10	0.6	0.2	0.8	20	0	0	0	0
11	0.6	0.2	0.8	20	0	0	0	0
12	0.6	0.2	0.8	20	0	0	0	0
13	0.6	0.2	0.8	20	0	0	0	0
14	0.6	0.2	0.8	20	0	0	0	0
15	0.6	0.2	0.8	20	0	0	0	0
16	0.5	0.2	0.7	20	0	0	0	0
17	0.6	0.2	0.8	20	0	0	0	0
18	0.6	0.2	0.9	20	0	0	0	0
19	0.6	0.2	0.9	20	0	0	0	0
20	0.6	0.2	0.8	20	0	0	0	0
21	0.5	0.2	0.7	20	0	0	0	0
22	0.5	0.2	0.7	20	0	0	0	0
23	0.5	0.2	0.7	20	0	0	0	0
24	0.5	0.2	0.7	20	0	0	0	0
25	0.5	0.2	0.8	20	0	0	0	0
26	0.4	0.2	0.7	20	0	0	0	0
27	0.4	0.2	0.7	20	0	0	0	0
28	0.5	0.2	0.7	20	0	0	0	0
29	0.6	0.2	0.8	20	0	0	0	0
30	0.6	0.2	0.9	20	0	0	0	0
31	0.6	0.3	0.8	20	0	0	0	0
Totals	19	7	26	620	0	0	0	0

\*Data are provisional and subject to revision (VCWPD)

Biofouling in bubbler line. Data interpolated between known gage heights.

	(1)	(2)	(1) + (2)	B.O. Required Flow Release (cfs)	(3)	(4)	(5)	(4) + (5)
	Source Stream Mean Daily Flows				Robles Facility Mean Daily Flows			
	Matilija Ck D/S Dam (cfs)	North Fork Matilija Ck.* (cfs)	Sum of Creek Flows (cfs)		Fishway Ladder (cfs)	VRNMO Weir (cfs)	Diversion Canal (cfs)	Total Inflow (cfs)
Sep-14								
1	0.4	0.3	0.7	20	0	0	0	0
2	0.4	0.3	0.7	20	0	0	0	0
3	0.5	0.3	0.7	20	0	0	0	0
4	0.4	0.3	0.7	20	0	0	0	0
5	0.4	0.3	0.7	20	0	0	0	0
6	0.4	0.3	0.7	20	0	0	0	0
7	0.4	0.3	0.7	20	0	0	0	0
8	0.4	0.3	0.7	20	0	0	0	0
9	0.4	0.3	0.7	20	0	0	0	0
10	0.4	0.3	0.7	20	0	0	0	0
11	0.4	0.3	0.7	20	0	0	0	0
12	0.4	0.3	0.7	20	0	0	0	0
13	0.4	0.3	0.7	20	0	0	0	0
14	0.4	0.3	0.7	20	0	0	0	0
15	0.4	0.3	0.7	20	0	0	0	0
16	0.5	0.3	0.8	20	0	0	0	0
17	0.5	0.1	0.6	20	0	0	0	0
18	0.5	0.1	0.6	20	0	0	0	0
19	0.5	0.1	0.6	20	0	0	0	0
20	0.5	0.1	0.6	20	0	0	0	0
21	0.5	0.1	0.6	20	0	0	0	0
22	0.5	0.1	0.6	20	0	0	0	0
23	0.5	0.1	0.6	20	0	0	0	0
24	0.5	0.1	0.6	20	0	0	0	0
25	0.5	0.1	0.6	20	0	0	0	0
26	0.5	0.1	0.6	20	0	0	0	0
27	0.5	0.1	0.6	20	0	0	0	0
28	0.5	0.1	0.6	20	0	0	0	0
29	0.5	0.1	0.6	20	0	0	0	0
30	0.5	0.1	0.6	20	0	0	0	0
Totals	14	6	20	600	0	0	0	0

\*Data are provisional and subject to revision (VCWPD)

Estimated daily data (VCWPD)

	(1)	(2)	(1) + (2)	B.O. Required Flow Release (cfs)	(3)	(4)	(5)	(4) + (5)
	Source Stream Mean Daily Flows				Robles Facility Mean Daily Flows			
	Matilija Ck D/S Dam (cfs)	North Fork Matilija Ck.* (cfs)	Sum of Creek Flows (cfs)		Fishway Ladder (cfs)	VRNMO Weir (cfs)	Diversion Canal (cfs)	Total Inflow (cfs)
Oct-14								
1	0.4	0.1	0.5	20	0	0	0	0
2	0.3	0.1	0.4	20	0	0	0	0
3	0.3	0.1	0.4	20	0	0	0	0
4	0.3	0.1	0.4	20	0	0	0	0
5	0.3	0.1	0.4	20	0	0	0	0
6	0.3	0.1	0.4	20	0	0	0	0
7	0.4	0.1	0.5	20	0	0	0	0
8	0.3	0.1	0.4	20	0	0	0	0
9	0.4	0.1	0.5	20	0	0	0	0
10	0.4	0.1	0.5	20	0	0	0	0
11	0.4	0.1	0.5	20	0	0	0	0
12	0.3	0.1	0.5	20	0	0	0	0
13	0.4	0.1	0.5	20	0	0	0	0
14	0.4	0.1	0.5	20	0	0	0	0
15	0.4	0.1	0.5	20	0	0	0	0
16	0.3	0.1	0.5	20	0	0	0	0
17	0.3	0.1	0.5	20	0	0	0	0
18	0.3	0.1	0.5	20	0	0	0	0
19	0.4	0.1	0.5	20	0	0	0	0
20	0.4	0.1	0.5	20	0	0	0	0
21	0.3	0.1	0.5	20	0	0	0	0
22	0.3	0.1	0.5	20	0	0	0	0
23	0.4	0.2	0.5	20	0	0	0	0
24	0.4	0.2	0.5	20	0	0	0	0
25	0.3	0.2	0.5	20	0	0	0	0
26	0.3	0.2	0.5	20	0	0	0	0
27	0.3	0.2	0.5	20	0	0	0	0
28	0.3	0.2	0.5	20	0	0	0	0
29	0.3	0.2	0.5	20	0	0	0	0
30	0.3	0.2	0.5	20	0	0	0	0
31	0.3	0.3	0.6	20	0	0	0	0
Totals	11	4	15	620	0	0	0	0

\*Data are provisional and subject to revision (VCWPD)

Estimated daily data (VCWPD)

	(1)	(2)	(1) + (2)	B.O. Required Flow Release (cfs)	(3)	(4)	(5)	(4) + (5)
	Source Stream Mean Daily Flows				Robles Facility Mean Daily Flows			
	Matilija Ck D/S Dam (cfs)	North Fork Matilija Ck.* (cfs)	Sum of Creek Flows (cfs)		Fishway Ladder (cfs)	VRNMO Weir (cfs)	Diversion Canal (cfs)	Total Inflow (cfs)
Nov-14								
1	0.4	0.3	0.7	20	0	0	0	0
2	0.3	0.3	0.7	20	0	0	0	0
3	0.3	0.4	0.7	20	0	0	0	0
4	0.3	0.4	0.7	20	0	0	0	0
5	0.3	0.4	0.7	20	0	0	0	0
6	0.3	0.4	0.7	20	0	0	0	0
7	0.4	0.4	0.7	20	0	0	0	0
8	0.4	0.4	0.8	20	0	0	0	0
9	0.4	0.4	0.8	20	0	0	0	0
10	0.5	0.4	0.9	20	0	0	0	0
11	0.5	0.4	0.9	20	0	0	0	0
12	0.7	0.4	1.1	20	0	0	0	0
13	0.8	0.4	1.2	20	0	0	0	0
14	0.9	0.4	1.3	20	0	0	0	0
15	0.9	0.4	1.3	20	0	0	0	0
16	0.8	0.4	1.2	20	0	0	0	0
17	0.6	0.4	1.0	20	0	0	0	0
18	0.6	0.4	1.0	20	0	0	0	0
19	0.6	0.4	1.0	20	0	0	0	0
20	0.7	0.4	1.1	20	0	0	0	0
21	0.8	0.4	1.3	20	0	0	0	0
22	0.7	0.4	1.1	20	0	0	0	0
23	0.8	0.4	1.2	20	0	0	0	0
24	0.6	0.4	1.0	20	0	0	0	0
25	0.5	0.4	1.0	20	0	0	0	0
26	0.6	0.4	1.0	20	0	0	0	0
27	0.8	0.4	1.2	20	0	0	0	0
28	0.9	0.4	1.3	20	0	0	0	0
29	1.0	0.4	1.4	20	0	0	0	0
30	1.3	0.4	1.7	20	0	0	0	0
Totals	19	12	31	600	0	0	0	0

\*Data are provisional and subject to revision (VCWPD)

Estimated daily data (VCWPD)

	(1)	(2)	(1) + (2)	B.O. Required Flow Release (cfs)	(3)	(4)	(5)	(4) + (5)
	Source Stream Mean Daily Flows				Robles Facility Mean Daily Flows			
	Matilija Ck D/S Dam (cfs)	North Fork Matilija Ck.* (cfs)	Sum of Creek Flows (cfs)		Fishway Ladder (cfs)	VRNMO Weir (cfs)	Diversion Canal (cfs)	Total Inflow (cfs)
Dec-14								
1	1.4	0.4	1.8	20	0	0	0	0
2	9.9	3.8	14	20	3	4	0	4
3	6.6	3.5	10	20	5	6	0	6
4	2.5	1.6	4.1	20	1	0.3	0	0
5	1.6	1.3	2.9	20	0.1	0	0	0
6	1.5	1.2	2.7	20	0	0	0	0
7	1.7	1.1	2.8	20	0	0	0	0
8	2.1	1.0	3.1	20	0	0	0	0
9	2.6	1.0	3.5	20	0	0	0	0
10	2.5	0.9	3.5	20	0	0	0	0
11	2.7	1.0	3.6	20	0	0	0	0
12	48	21	69	20	18	16	26	42
13	24	3.6	28	20	18	20	5	25
14	13	2.2	15	20	12	14	0	14
15	10	2.1	13	20	9	11	0	11
16	9.5	2.0	12	20	8	10	0	10
17	14	2.5	16	20	12	14	0	14
18	10	1.8	12	20	9	11	0	11
19	9.3	1.6	11	20	8	10	0	10
20	8.8	1.5	10	20	7	9	0	9
21	9.4	1.4	11	20	6	9	0	9
22	8.0	1.3	9.3	20	5	7	0	7
23	7.9	1.3	9.2	20	4	6	0	6
24	8.0	1.3	9.3	20	4	6	0	6
25	8.2	1.2	9.4	20	5	6	0	6
26	7.5	1.3	8.8	20	4	5	0	5
27	7.6	1.3	8.9	20	5	6	0	6
28	7.6	1.3	8.9	20	4	6	0	6
29	7.7	1.3	9.0	20	4	6	0	6
30	7.9	1.3	9.2	20	4	6	0	6
31	7.4	1.3	8.7	20	4	5	0	5
Totals	269	69	339	620	162	191	31	222

\*Data are provisional and subject to revision (VCWPD)

Estimated daily data (VCWPD)

	(1)	(2)	(1) + (2)	B.O. Required Flow Release (cfs)	(3)	(4)	(5)	(4) + (5)
	Source Stream Mean Daily Flows				Robles Facility Mean Daily Flows			
	Matilija Ck D/S Dam (cfs)	North Fork Matilija Ck.* (cfs)	Sum of Creek Flows (cfs)		Fishway Ladder (cfs)	VRNMO Weir (cfs)	Diversion Canal (cfs)	Total Inflow (cfs)
<b>Jan-15</b>								
1	7.2	1.3	8.5	30	4	5	0	5
2	7.1	1.3	8.4	30	3	4	0	4
3	6.9	1.3	8.2	30	4	3	0	3
4	6.8	1.3	8.1	30	4	3	0	3
5	6.7	1.2	7.9	30	3	3	0	3
6	6.5	1.2	7.7	30	3	1	0	1
7	6.2	1.2	7.4	30	3	2	0	2
8	6.2	1.2	7.4	30	2	1	0	1
9	6.1	1.2	7.3	30	3	1	0	1
10	6.6	1.3	7.9	30	2	1	0	1
11	14	3.2	17	30	10	12	0	12
12	9.2	2.1	11	30	7	8	0	8
13	8.6	1.9	10	30	5	7	0	7
14	8.4	1.8	10	30	4	5	0	5
15	8.2	1.7	9.9	30	4	5	0	5
16	8.0	1.7	9.7	30	4	5	0	5
17	8.0	1.6	9.6	30	3	3	0	3
18	7.8	1.6	9.4	30	3	3	0	3
19	7.7	1.5	9.2	30	4	3	0	3
20	7.7	1.5	9.2	30	3	2	0	2
21	7.2	1.5	8.7	30	2	3	0	3
22	7.0	1.5	8.5	30	3	2	0	2
23	7.0	1.4	8.4	30	2	2	0	2
24	6.9	1.4	8.3	30	3	2	0	2
25	6.8	1.4	8.2	30	3	2	0	2
26	6.8	1.3	8.1	30	4	2	0	2
27	7.0	1.4	8.4	30	4	4	0	4
28	6.7	1.4	8.1	30	3	3	0	3
29	6.5	1.4	7.9	30	2	2	0	2
30	6.5	1.4	7.9	30	1	1	0	1
31	6.5	1.5	8.0	30	2	2	0	2
Totals	228	47	275	930	110	104	0	104

\*Data are provisional and subject to revision (VCWPD)

SCADA malfunction, no separate readings available for fishway. Fishway discharge set equal to weir.

	(1)	(2)	(1) + (2)	B.O. Required Flow Release (cfs)	(3)	(4)	(5)	(4) + (5)
	Source Stream Mean Daily Flows				Robles Facility Mean Daily Flows			
	Matilija Ck D/S Dam (cfs)	North Fork Matilija Ck.* (cfs)	Sum of Creek Flows (cfs)		Fishway Ladder (cfs)	VRNMO Weir (cfs)	Diversion Canal (cfs)	Total Inflow (cfs)
<b>Feb-15</b>								
1	6.2	1.4	7.6	30	1	1	0	1
2	6.1	1.3	7.4	30	2	2	0	2
3	5.7	1.3	7.0	30	1	1	0	1
4	5.6	1.3	6.9	30	1	1	0	1
5	5.5	1.3	6.8	30	1	1	0	1
6	5.3	1.3	6.6	30	1	1	0	1
7	6.6	1.5	8.1	30	3	3	0	3
8	6.2	1.4	7.6	30	4	4	0	4
9	5.7	1.2	6.9	30	1	1	0	1
10	5.5	1.2	6.7	30	1	1	0	1
11	5.3	1.1	6.4	30	1	1	0	1
12	4.9	1.1	6.0	30	0	1	0	1
13	4.8	1.0	5.8	30	0	1	0	1
14	4.8	1.0	5.8	30	0	1	0	1
15	4.7	1.0	5.7	30	0	1	0	1
16	4.7	1.0	5.7	30	0	0.3	0	0
17	4.7	0.9	5.7	30	0	0.2	0	0
18	4.7	0.9	5.7	30	0	0.1	0	0
19	4.7	0.9	5.6	30	0	0.2	0	0
20	4.7	0.9	5.7	30	0	1	0	1
21	4.8	0.9	5.7	30	0	1	0	1
22	5.9	1.1	7.0	30	0	1	0	1
23	5.5	1.2	6.7	30	0	2	0	2
24	4.9	0.9	5.8	30	0	1	0	1
25	4.6	0.9	5.6	30	0	1	0	1
26	4.7	0.9	5.6	30	0	1	0	1
27	4.5	0.9	5.4	30	0	1	0	1
28	5.3	1.0	6.3	30	0	1	0	1
<b>Totals</b>	<b>147</b>	<b>31</b>	<b>178</b>	<b>840</b>	<b>17</b>	<b>29</b>	<b>0</b>	<b>29</b>

\*Data are provisional and subject to revision (VCWPD)

SCADA malfunction, no separate readings available for fishway. Fishway discharge set equal to weir.

	(1)	(2)	(1) + (2)	B.O. Required Flow Release (cfs)	(3)	(4)	(5)	(4) + (5)
	Source Stream Mean Daily Flows				Robles Facility Mean Daily Flows			
	Matilija Ck D/S Dam (cfs)	North Fork Matilija Ck.* (cfs)	Sum of Creek Flows (cfs)		Fishway Ladder (cfs)	VRNMO Weir (cfs)	Diversion Canal (cfs)	Total Inflow (cfs)
Mar-15								
1	6.4	1.4	7.8	30	0	3	0	3
2	5.7	1.3	7.0	30	0	3	0	3
3	5.0	1.1	6.1	30	0	1	0	1
4	4.6	1.1	5.7	30	0	1	0	1
5	4.5	1.0	5.5	30	0	1	0	1
6	4.4	0.9	5.4	30	0	1	0	1
7	4.4	0.9	5.2	30	0	0.4	0	0
8	4.3	0.8	5.2	30	0	0.3	0	0
9	4.3	0.9	5.2	30	0	0.2	0	0
10	4.2	0.8	5.0	30	0	0.2	0	0
11	4.3	0.8	5.0	30	0	0	0	0
12	4.2	0.8	5.0	30	0	0	0	0
13	3.9	0.6	4.5	30	0	0	0	0
14	3.8	0.5	4.3	30	0	0	0	0
15	3.7	0.5	4.2	30	0	0	0	0
16	3.6	0.5	4.1	30	0	0	0	0
17	4.1	0.5	4.6	30	0	0	0	0
18	5.0	0.7	5.7	30	0	0	0	0
19	4.6	1.0	5.6	30	0	0	0	0
20	3.7	0.8	4.5	30	0	0	0	0
21	3.7	0.8	4.5	30	0	0	0	0
22	3.7	0.9	4.6	30	0	0	0	0
23	3.8	0.9	4.7	30	0	0	0	0
24	4.0	0.9	4.8	30	0	0	0	0
25	3.3	0.7	4.0	30	0	0	0	0
26	3.3	0.7	4.0	30	0	0	0	0
27	3.2	0.6	3.8	30	0	0	0	0
28	3.4	0.6	4.1	30	0	0	0	0
29	3.3	0.6	3.9	30	0	0	0	0
30	3.2	0.6	3.7	30	0	0	0	0
31	3.2	0.6	3.8	30	0	0	0	0
Totals	127	25	152	930	0	10	0	10

\*Data are provisional and subject to revision (VCWPD)



	(1) (2) (1) + (2)			B.O. Required Flow Release (cfs)	(3) (4) (5) (4) + (5)			
	Source Stream Mean Daily Flows				Robles Facility Mean Daily Flows			
	Matilija Ck D/S Dam (cfs)	North Fork Matilija Ck.* (cfs)	Sum of Creek Flows (cfs)		Fishway Ladder (cfs)	VRNMO Weir (cfs)	Diversion Canal (cfs)	Total Inflow (cfs)
Apr-15								
1	3.2	0.7	3.9	30	0	0	0	0
2	3.0	0.7	3.7	30	0	0	0	0
3	2.9	0.6	3.5	30	0	0	0	0
4	2.8	0.6	3.3	30	0	0	0	0
5	2.8	0.6	3.4	30	0	0	0	0
6	2.9	0.5	3.4	30	0	0	0	0
7	3.8	0.9	4.7	30	0	0	0	0
8	3.6	1.1	4.7	30	0	0	0	0
9	3.1	0.9	3.9	30	0	0	0	0
10	2.9	0.8	3.8	30	0	0	0	0
11	2.9	0.8	3.7	30	0	0	0	0
12	2.7	0.7	3.4	30	0	0	0	0
13	2.7	0.6	3.3	30	0	0	0	0
14	2.8	0.6	3.4	30	0	0	0	0
15	2.4	0.6	3.0	30	0	0	0	0
16	2.4	0.5	2.9	30	0	0	0	0
17	2.2	0.5	2.7	30	0	0	0	0
18	2.2	0.6	2.7	30	0	0	0	0
19	2.2	0.5	2.7	30	0	0	0	0
20	2.2	0.5	2.7	30	0	0	0	0
21	2.3	0.5	2.8	30	0	0	0	0
22	2.4	0.6	3.0	30	0	0	0	0
23	2.5	0.7	3.2	30	0	0	0	0
24	2.8	0.9	3.7	30	0	0	0	0
25	2.7	0.9	3.5	30	0	0	0	0
26	2.6	0.7	3.4	30	0	0	0	0
27	2.5	0.6	3.0	30	0	0	0	0
28	2.2	0.6	2.8	30	0	0	0	0
29	2.1	0.5	2.6	30	0	0	0	0
30	2.1	0.5	2.6	30	0	0	0	0
Totals	80	20	100	900	0	0	0	0


\*Data are provisional and subject to revision (VCWPD)

	(1) + (2)			B.O. Required Flow Release (cfs)	(4) + (5)			
	Source Stream Mean Daily Flows				Robles Facility Mean Daily Flows			
	(1) Matilija Ck D/S Dam (cfs)	(2) North Fork Matilija Ck.* (cfs)	(1) + (2) Sum of Creek Flows (cfs)		(3) Fishway Ladder (cfs)	(4) VRNMO Weir (cfs)	(5) Diversion Canal (cfs)	(4) + (5) Total Inflow (cfs)
May-15								
1	2.0	0.5	2.5	30	0	0	0	0
2	2.0	0.5	2.5	30	0	0	0	0
3	2.0	0.5	2.5	30	0	0	0	0
4	2.1	0.5	2.6	30	0	0	0	0
5	2.1	0.5	2.6	30	0	0	0	0
6	2.2	0.5	2.7	30	0	0	0	0
7	2.3	0.5	2.8	30	0	0	0	0
8	2.3	0.6	2.9	30	0	0	0	0
9	2.4	0.6	3.0	30	0	0	0	0
10	2.3	0.5	2.9	30	0	0	0	0
11	2.2	0.5	2.7	30	0	0	0	0
12	2.1	0.5	2.6	30	0	0	0	0
13	2.1	0.5	2.6	30	0	0	0	0
14	2.2	0.6	2.8	30	0	0	0	0
15	2.3	0.6	2.9	30	0	0	0	0
16	2.1	0.5	2.6	30	0	0	0	0
17	2.1	0.5	2.6	30	0	0	0	0
18	2.1	0.5	2.6	30	0	0	0	0
19	2.0	0.5	2.5	30	0	0	0	0
20	2.0	0.5	2.5	30	0	0	0	0
21	2.0	0.5	2.5	30	0	0	0	0
22	2.1	0.5	2.6	30	0	0	0	0
23	2.0	0.5	2.5	30	0	0	0	0
24	2.0	0.5	2.5	30	0	0	0	0
25	2.0	0.5	2.5	30	0	0	0	0
26	1.8	0.5	2.2	30	0	0	0	0
27	1.7	0.5	2.2	30	0	0	0	0
28	1.7	0.5	2.2	30	0	0	0	0
29	1.7	0.5	2.2	30	0	0	0	0
30	1.7	0.5	2.1	30	0	0	0	0
31	1.6	0.5	2.1	30	0	0	0	0
Totals	63	16	79	930	0	0	0	0


\*Data are provisional and subject to revision (VCWPD)

	(1)	(2)	(1) + (2)	B.O. Required Flow Release (cfs)	(3)	(4)	(5)	(4) + (5)
	Source Stream Mean Daily Flows				Robles Facility Mean Daily Flows			
	Matilija Ck D/S Dam (cfs)	North Fork Matilija Ck.* (cfs)	Sum of Creek Flows (cfs)		Fishway Ladder (cfs)	VRNMO Weir (cfs)	Diversion Canal (cfs)	Total Inflow (cfs)
Jun-15								
1	1.5	0.5	2.0	30	0	0	0	0
2	1.5	0.5	2.0	30	0	0	0	0
3	1.5	0.5	1.9	30	0	0	0	0
4	1.6	0.4	2.0	30	0	0	0	0
5	1.7	0.3	2.0	30	0	0	0	0
6	1.5	0.3	1.9	30	0	0	0	0
7	1.4	0.3	1.7	30	0	0	0	0
8	1.3	0.3	1.6	30	0	0	0	0
9	1.5	0.4	1.8	30	0	0	0	0
10	1.6	0.4	2.0	30	0	0	0	0
11	1.4	0.4	1.8	30	0	0	0	0
12	1.4	0.3	1.7	30	0	0	0	0
13	1.4	0.3	1.7	30	0	0	0	0
14	1.3	0.3	1.7	30	0	0	0	0
15	1.3	0.3	1.6	30	0	0	0	0
16	1.2	0.3	1.5	30	0	0	0	0
17	1.1	0.3	1.4	30	0	0	0	0
18	1.1	0.3	1.4	30	0	0	0	0
19	1.0	0.3	1.3	30	0	0	0	0
20	1.0	0.3	1.2	30	0	0	0	0
21	0.9	0.3	1.3	30	0	0	0	0
22	0.9	0.3	1.3	30	0	0	0	0
23	0.9	0.3	1.2	30	0	0	0	0
24	0.9	0.3	1.2	30	0	0	0	0
25	0.8	0.3	1.2	30	0	0	0	0
26	0.8	0.3	1.1	30	0	0	0	0
27	0.8	0.3	1.1	30	0	0	0	0
28	0.8	0.3	1.1	30	0	0	0	0
29	0.8	0.3	1.1	30	0	0	0	0
30	0.7	0.3	1.0	30	0	0	0	0
Totals	36	10	46	900	0	0	0	0

\*Data are provisional and subject to revision (VCWPD)

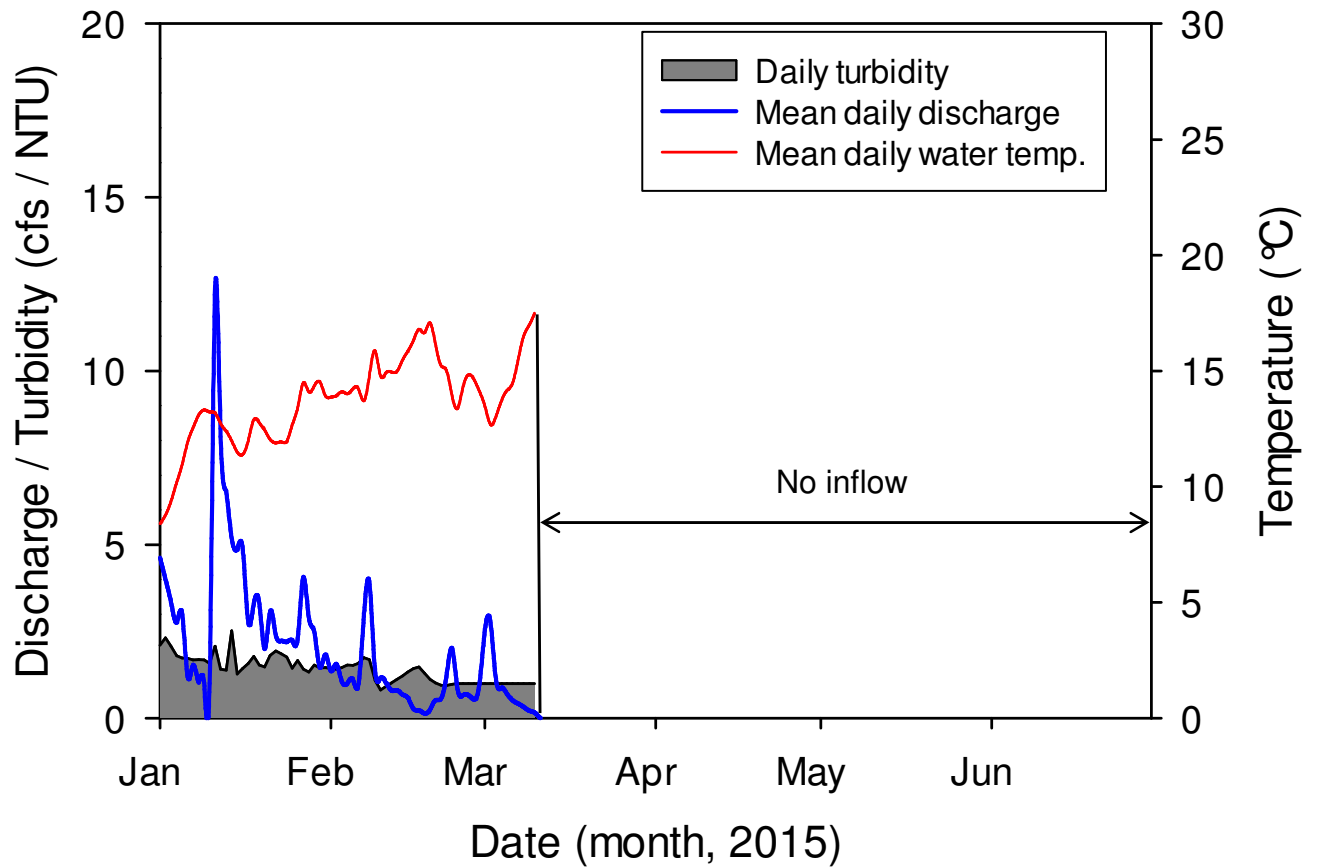

Appendix 8. Mean daily discharge, water temperature, and turbidity at the Robles Fish Facility during the 2015 fish passage season.

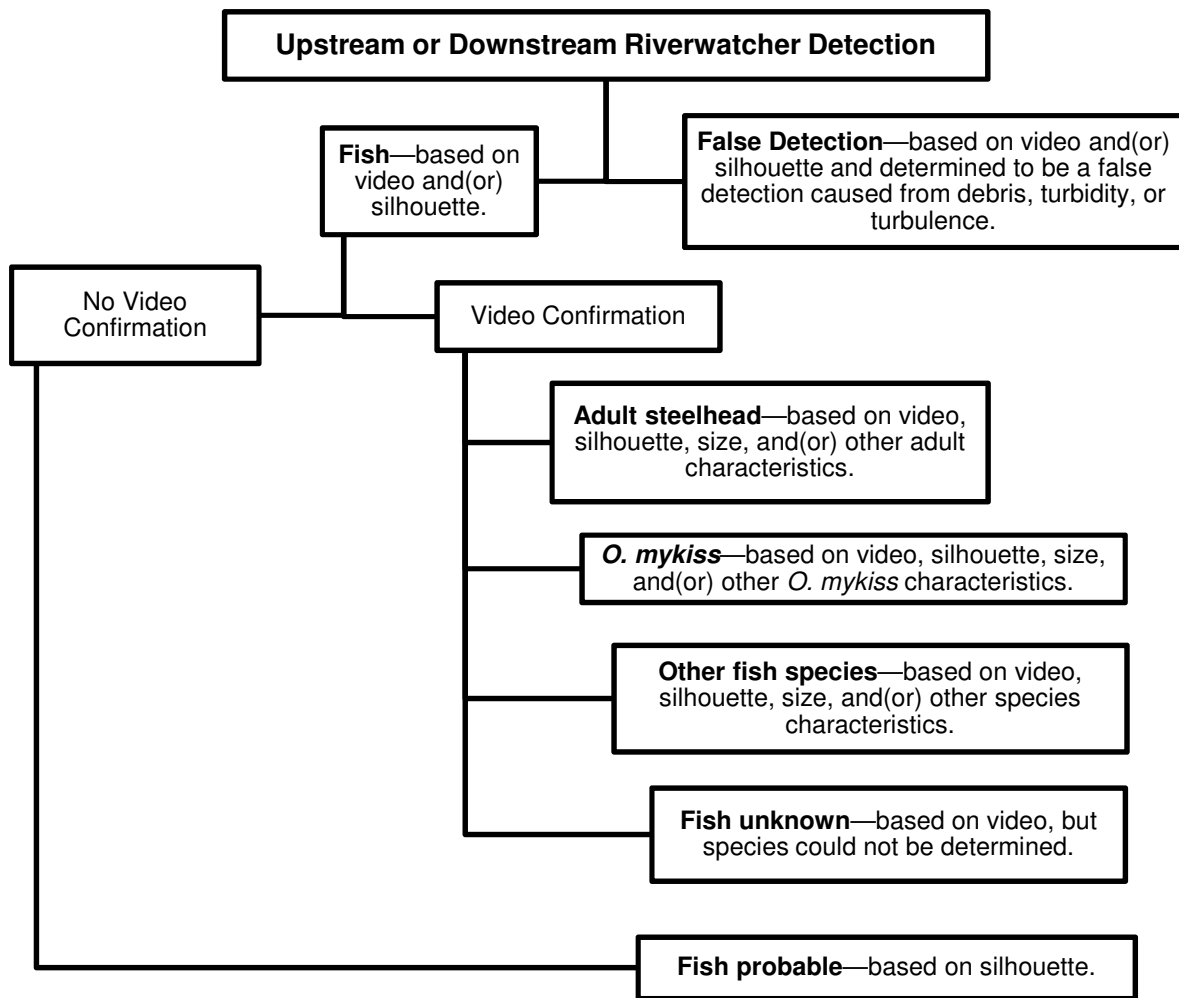


Appendix 9. Riverwatcher detection classification flow chart that outlines the pathways for upstream and downstream detections.

Appendix 10. Summary of Riverwatcher detections classified as fish probable and *O. mykiss* from January through April of 2015.

	Upstream	Downstream
<i>O. mykiss</i>	0	0
Fish, non <i>O. mykiss</i>	0	0
Fish, unknown	0	0
Fish, probable	0	0
False detections	29	40
<b>Total</b>	<b>29</b>	<b>40</b>
Mean date - <i>O. mykiss</i>	n/a	n/a
Mean date - fish, non <i>O. mykiss</i>	n/a	n/a
Mean date - fish, unknown	n/a	n/a
Mean date - fish, probable	n/a	n/a
Mean time - <i>O. mykiss</i> (24h)	n/a	n/a
Mean time - fish, non <i>O. mykiss</i> (24h)	n/a	n/a
Mean time - fish, unknown (24h)	n/a	n/a
Mean time - fish, probable (24h)	n/a	n/a
Mean length- <i>O. mykiss</i> (cm)	n/a	n/a
Mean length- fish, non <i>O. mykiss</i> (cm)	n/a	n/a
Mean length- fish, unknown (cm)	n/a	n/a
Mean length- fish, probable (cm)	n/a	n/a
Mean daily temperature - <i>O. mykiss</i> (°C)	n/a	n/a
Mean daily temperature - fish, non <i>O. mykiss</i> (°C)	n/a	n/a
Mean daily temperature - fish, unknown (°C)	n/a	n/a
Mean daily temperature - fish, probable (°C)	n/a	n/a
Mean daily turbidity - <i>O. mykiss</i> (NTU)	n/a	n/a
Mean daily turbidity - fish, non <i>O. mykiss</i> (NTU)	n/a	n/a
Mean daily turbidity - fish, probable (NTU)	n/a	n/a
Mean daily turbidity - fish, unknown (NTU)	n/a	n/a
Mean daily turbidity - false detections (NTU)	2	3
Mean daily discharge - <i>O. mykiss</i> (cfs)	n/a	n/a
Mean daily discharge - fish, non <i>O. mykiss</i> (cfs)	n/a	n/a
Mean daily discharge - fish, probable (cfs)	n/a	n/a
Mean daily discharge - fish, unknown (cfs)	n/a	n/a
Mean daily discharge - false detections (cfs)	1	<1

Appendix 11. *O. mykiss* presence/absence survey index sites in the Ventura Basin.

Site No.	Location	River km	Site	Lat.	Long.	Length (m)	Width (m)
1	Ventura River	0.9	Main Street pool	34.28126	-119.30887	25.1	10.0
		0.9	Main Street riffle	34.28164	-119.30893	34.0	8.0
2	Ventura River	9.4	Foster Park pool 1	34.35236	-119.30790	25.0	15.4
		10.0	Foster Park pool 2	34.35508	-119.30988	46.0	16.0
		9.7	Foster Park riffle	34.35308	-119.30877	45.0	11.0
3	Ventura River	13.0	San Antonio conf. pool 1	34.38042	-119.30752	33.0	22.0
		13.0	San Antonio conf. riffle	34.38011	-119.30755	42.0	14.0
		12.9	San Antonio conf. pool 2	34.37969	-119.30781	50.0	10.0
4	Ventura River	18.8	Hwy 150 pool 1	34.42643	-119.30220	43.3	14.0
		18.8	150 pool 2	34.42689	-119.30123	49.5	9.0
		18.7	Hwy 150 riffle	34.42576	-119.30258	43.6	11.0
5	Ventura River	22.1	Land Cons. pool 1	34.45342	-119.29314	50.1	19.1
		22.2	Land Cons. pool 2	34.45448	-119.29293	48.6	15.1
		22.1	Land Cons. Riffle	34.45411	-119.29315	44.6	18.8
6	Ventura River	23.2	Robles weir pools	34.46306	-119.29058	58.7	19.0
		23.3	Robles glide	34.46368	-119.29065	78.3	17.3
		23.4	Robles entrance pool	34.46446	-119.29058	39.8	21.8
		23.4	Fish ladder entrance box	34.46460	-119.29062	15.0	3.0
		23.5	Robles screenbay	34.46451	-119.29133	42.2	13.5
		23.5	Robles forebay	34.46503	-119.29053	33.0	17.2
7	San Antonio Cr.	0.2	Lower San Antonio pool 1	34.38088	-119.30542	16.0	6.0
		0.2	Lower San Antonio riffle	34.38098	-119.30711	20.2	3.5
		0.4	Lower San Antonio pool 2	34.38103	-119.30657	40.0	6.0
8	San Antonio Cr.	9.4	Upper San Antonio riffle	34.43268	-119.25090	25.0	5.0
		9.5	Upper San Antonio pool	34.43241	-119.25095	19.8	5.5
9	NF Matilija Cr.	0.1	Lower NF pool 1	34.48508	-119.30105	7.3	13.3
		0.1	Lower NF pool 2	34.48533	-119.30138	7.9	10.9
		0.2	Lower NF riffle	34.48523	-119.30198	17.8	8.0
10	NF Matilija Cr.	6.6	Upper NF pool	34.50956	-119.27520	29.0	9.0
		6.6	Upper NF riffle	34.50933	-119.27528	33.1	7.5
11	Matilija Cr.	0.3	Lower Matilija pool	34.48282	-119.30170	21.1	24.7
		0.3	Lower Matilija riffle	34.48302	-119.30154	15.9	8.0
12	Matilija Cr.	2.1	Upper Matilija pool	34.49190	-119.31599	89.4	13.7
		2.1	Upper Matilija riffle	34.49233	-119.31704	51.0	9.0
14	San Antonio Cr.	4.3	Fraser St. pool	34.40276	-119.28169	12.8	13.8
		4.4	Fraser St. riffle	34.40291	-119.28157	30.8	5.9
15	Ventura River	8.5	Bedrock pool	34.34539	-119.29931	50.0	17.0
		8.5	Bedrock pool riffle	34.34569	-119.29958	37.0	6.0

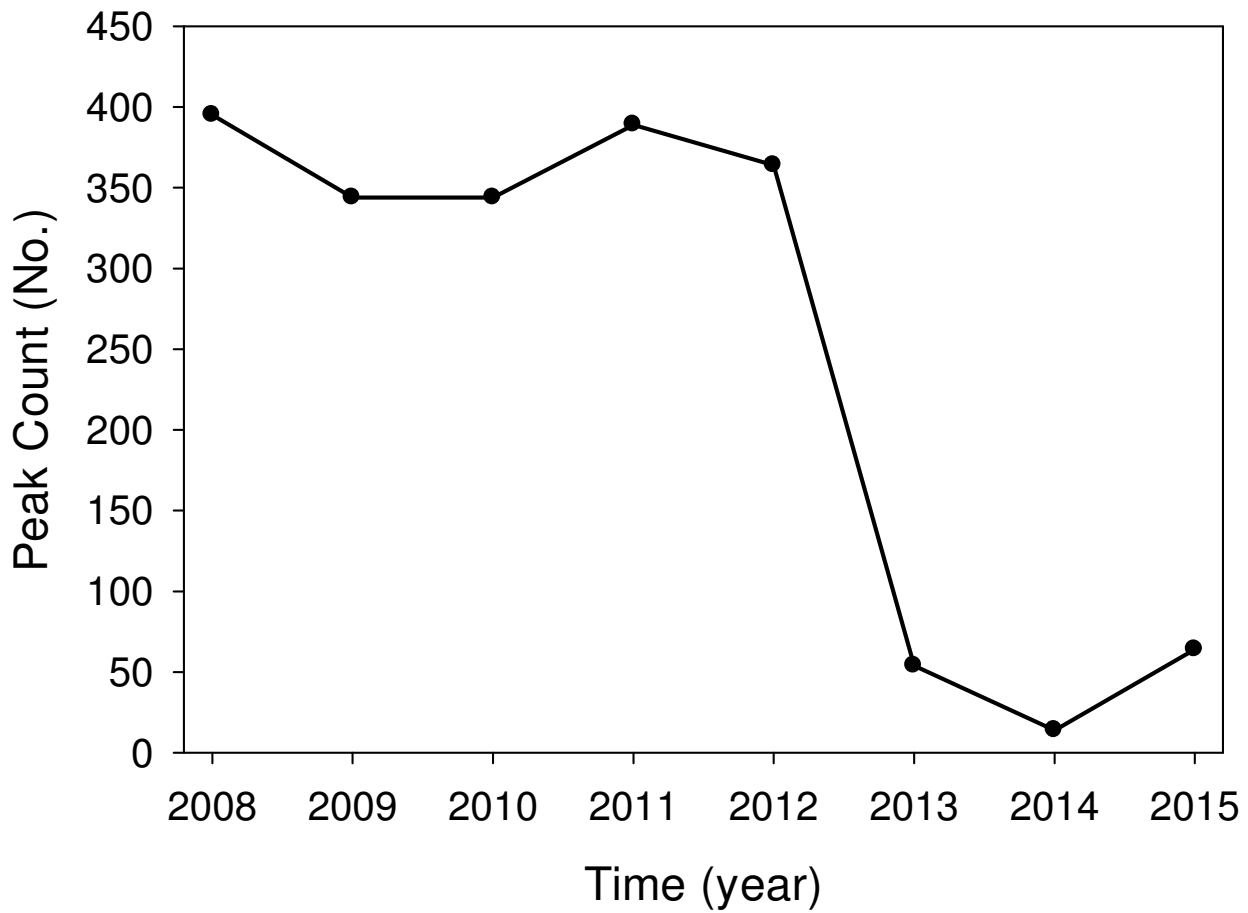


Appendix 12. Peak snorkel counts of *O. mykiss* from 2008-2015 at survey index sites in the Ventura Basin.




Appendix 13. *O. mykiss* spawning index sites in the Ventura Basin.

Site No.	Unit	Location	River km	Description	Lat.	Long.	Length (m)	Width (m)	Spawning Area (m <sup>2</sup> )
24	1	Ventura River	0.8	Main St. Bridge	34.28085	-119.30862	220.0	10.0	2,200
2	1	Ventura River	7.9	Near Treatment Plant	34.34030	-119.29782	90.0	18.0	1,620
	2		8.1	Near Treatment Plant	34.34208	-119.29849	39.0	20.0	780
4	1	Ventura River	15.5	Near Santa Ana Blvd bridge	34.39950	-119.30853	26.7	8.0	214
5	1	Ventura River	18.7	Upstream of Hwy 150	34.42641	-119.30227	18.0	10.0	180
6	1	Ventura River	22.1	Land Conservancy pool tailout	34.45334	-119.29309	18.1	19.5	353
	2		22.2	Land Conservancy pool tailout	34.45445	-119.29298	16.3	14.7	240
7	1	Ventura River	23.3	Robles-1st weir pool	34.46334	-119.29061	15.4	23.9	368
	2		23.4	Robles-tailout of entrance pool	34.46436	-119.29045	18.2	21.9	399
8	2	Ventura River	24.3	Upstream of Robles	34.46504	-119.29032	6.2	15.4	95
	3		23.4	Upstream of Robles forebay	34.46504	-119.29032	80.0	6.0	480
12	1	NF Matilija Cr.	0.7	Lower NF Matilija Cr.	34.48825	-119.30525	41.0	9.0	369
13	1	NF Matilija Cr.	6.6	Downstream of Wheeler Gorge	34.50911	-119.27501	23.0	8.0	184
	2		6.6	Downstream of Wheeler Gorge	34.50960	-119.27528	22.3	8.0	178
14	1	Matilija Cr.	1.9	Lake Matilija delta	34.49000	-119.31446	26.2	14.6	383
	2		2.1	Upstream of Lake Matilija	34.49198	-119.31645	15.0	10.0	150
	3 <sup>a</sup>		2.2	Upstream of Lake Matilija	34.49209	-119.31661	315	9.0	2,835
15	1	Matilija Cr.	8.4	End of Matilija Road	34.50456	-119.37449	20.0	19.0	380
17	1	Ventura River	9.3	DS of Foster to US reach	34.35069	-119.30463	1750	11.0	19,250
18	1	Ventura River	12.3	Casitas Springs	34.37354	-119.30877	60	12.0	960
	2		12.7	Casitas Springs	34.37712	-119.30721	230	9.0	2070
19	1	San Antonio Cr.	0.0	Mouth to end of Old Cr. Rd. reach	34.38030	-119.30738	2160	8.0	17,280
20	1	San Antonio Cr.	4.2	DS to US of Frasier St.	34.40197	-119.28237	180	8.0	1,440
21	1	San Antonio Cr.	7.8	Camp Comfort reach	34.42493	-119.26110	690	5.0	3,450
22	1	San Antonio Cr.	9.5	Upper San Antonio Cr. reach	34.43269	-119.25087	640	5.0	3,200
23	1	NF Matilija Cr.	0.1	Lower NF Matilija Cr.	34.48520	-119.30118	120	6.0	720
25	1	NF Matilija Cr.	4.1	Near Wheeler's Springs Reach	34.50826	-119.28955	300	4.5	1350
26 <sup>a</sup>	1	NF Matilija Cr.	1.0	Downstream of NF gage bridge	34.49049	-119.30586	302	4.3	1,299
27 <sup>a</sup>	1	Matilija Cr.	5.7	Upstream Matilija hot springs	34.50030	-119.34993	105	8.0	840
Total =									63,266

<sup>a</sup> Unit 14-3 and sites 26 and 27 added in February of 2015.

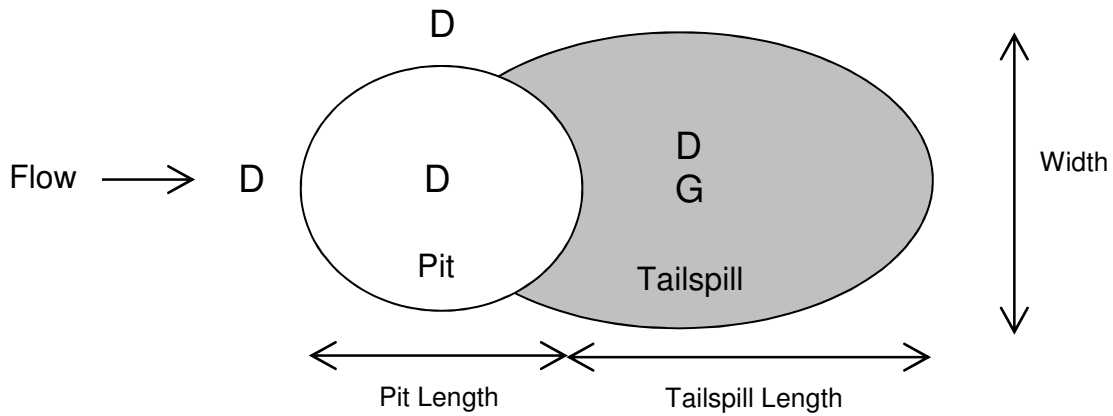

Appendix 14. Diagram of *O. mykiss* redds measurements. (D) = locations of depth measurements and (G) = location of gravel substrate sampling.

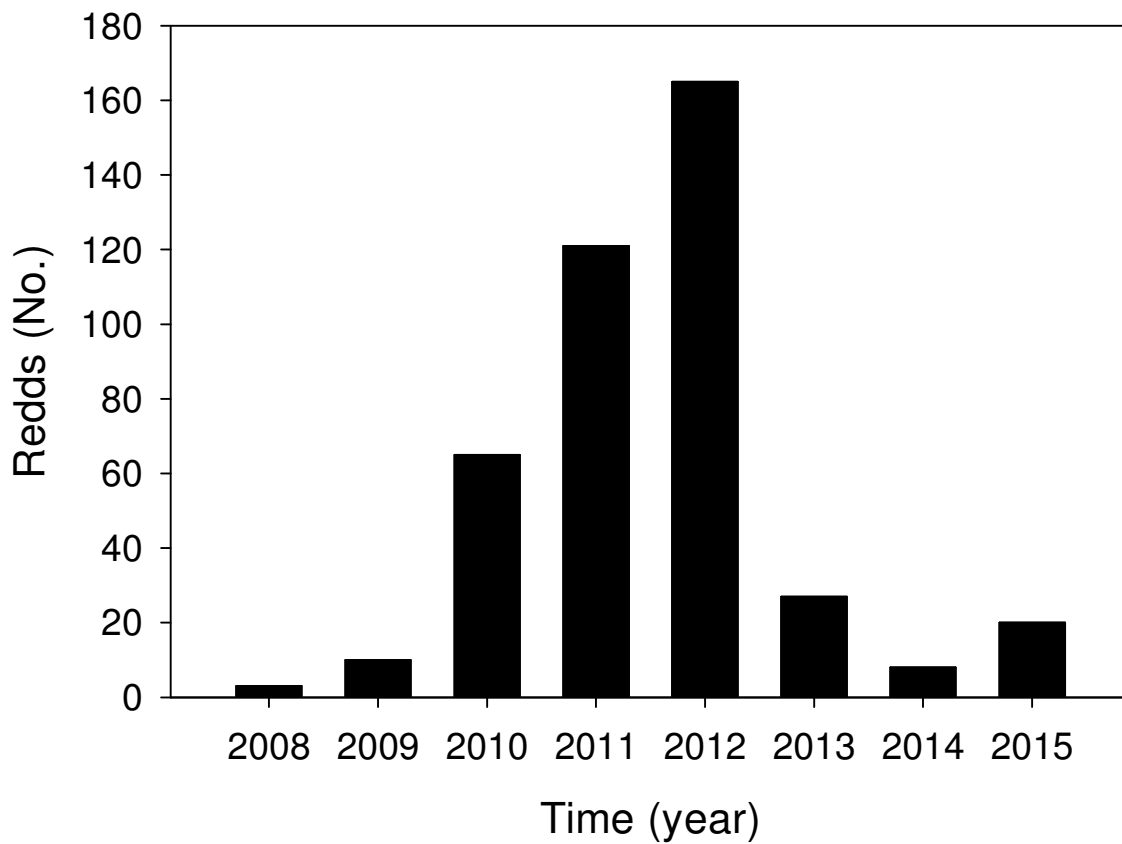

Appendix 15. Total number of *O. mykiss* redds counted at index spawning sites from 2008 through 2015 spawning years.


## Appendix 16. Water quality monitoring sites and sampling summary.

Site Number	Site Description	Site Location <sup>a</sup>	Sampling Method <sup>b</sup>	Sampling Type <sup>c</sup>	Frequency
1	Estuary	V 0.3 km	Multiparameter	Grab profile	Monthly
2	Main St. Bridge	V 1.0 km	Temperature Multiparameter	Continuous Grab	30 min Monthly
3	Foster Park	V 9.7 km	Temperature Multiparameter	Continuous Grab	30 min Monthly
4	Santa Ana Blvd Bridge	V 15.5 km	Temperature Multiparameter	Continuous Grab	30 min Monthly
5	Hwy 150 Bridge	V 18.7 km	Temperature Multiparameter	Continuous Grab	30 min Monthly
6	Robles Dam	V 23.5 km	Temperature Multiparameter Turbidity Weather	Continuous Grab Continuous Continuous	30 min Monthly Hourly 30 min
7	North Fork Matilija	N 1.3 km	Temperature Multiparameter	Continuous Grab	30 min Monthly
8	Below Matilija Dam	M 1.0 km	Temperature Multiparameter	Continuous Grab	30 min Monthly
9	Above Matilija Dam	M 2.1 km	Temperature Multiparameter	Continuous Grab	30 min Monthly
10	Middle Matilija	M 8.5 km	Temperature Multiparameter	Continuous Grab	30 min Monthly
11	Lower San Antonio	S 0.3 km	Temperature Multiparameter	Continuous Grab	30 min Monthly
12	Middle San Antonio	S 9.5 km	Temperature Multiparameter	Continuous Grab	30 min Monthly
13	Lower Coyote	C 0.4 km	Temperature Multiparameter	Continuous Grab	30 min Monthly
14	Fraser St.	S 4.4 km	Temperature	Continuous	30 min


<sup>a</sup>Site location is identified by the river system and kilometers from its confluence. C = Coyote Creek, M = Matilija Creek, N = North Fork Matilija Creek, S = San Antonio Creek, V = Ventura River.

<sup>b</sup>Temperature data were collected using programmable loggers. Multiparameter water quality probe was used to collect water quality data including: temperature, dissolved oxygen, conductivity, salinity, pH, turbidity (separate meter). Turbidity data was collected using a programmable logger.


<sup>c</sup>Continuous samples were collected at the identified frequency. Grab samples were collected once at the identified frequency. Grab profile samples were collected once at the identified frequency at 0.5 m intervals from surface to bottom.

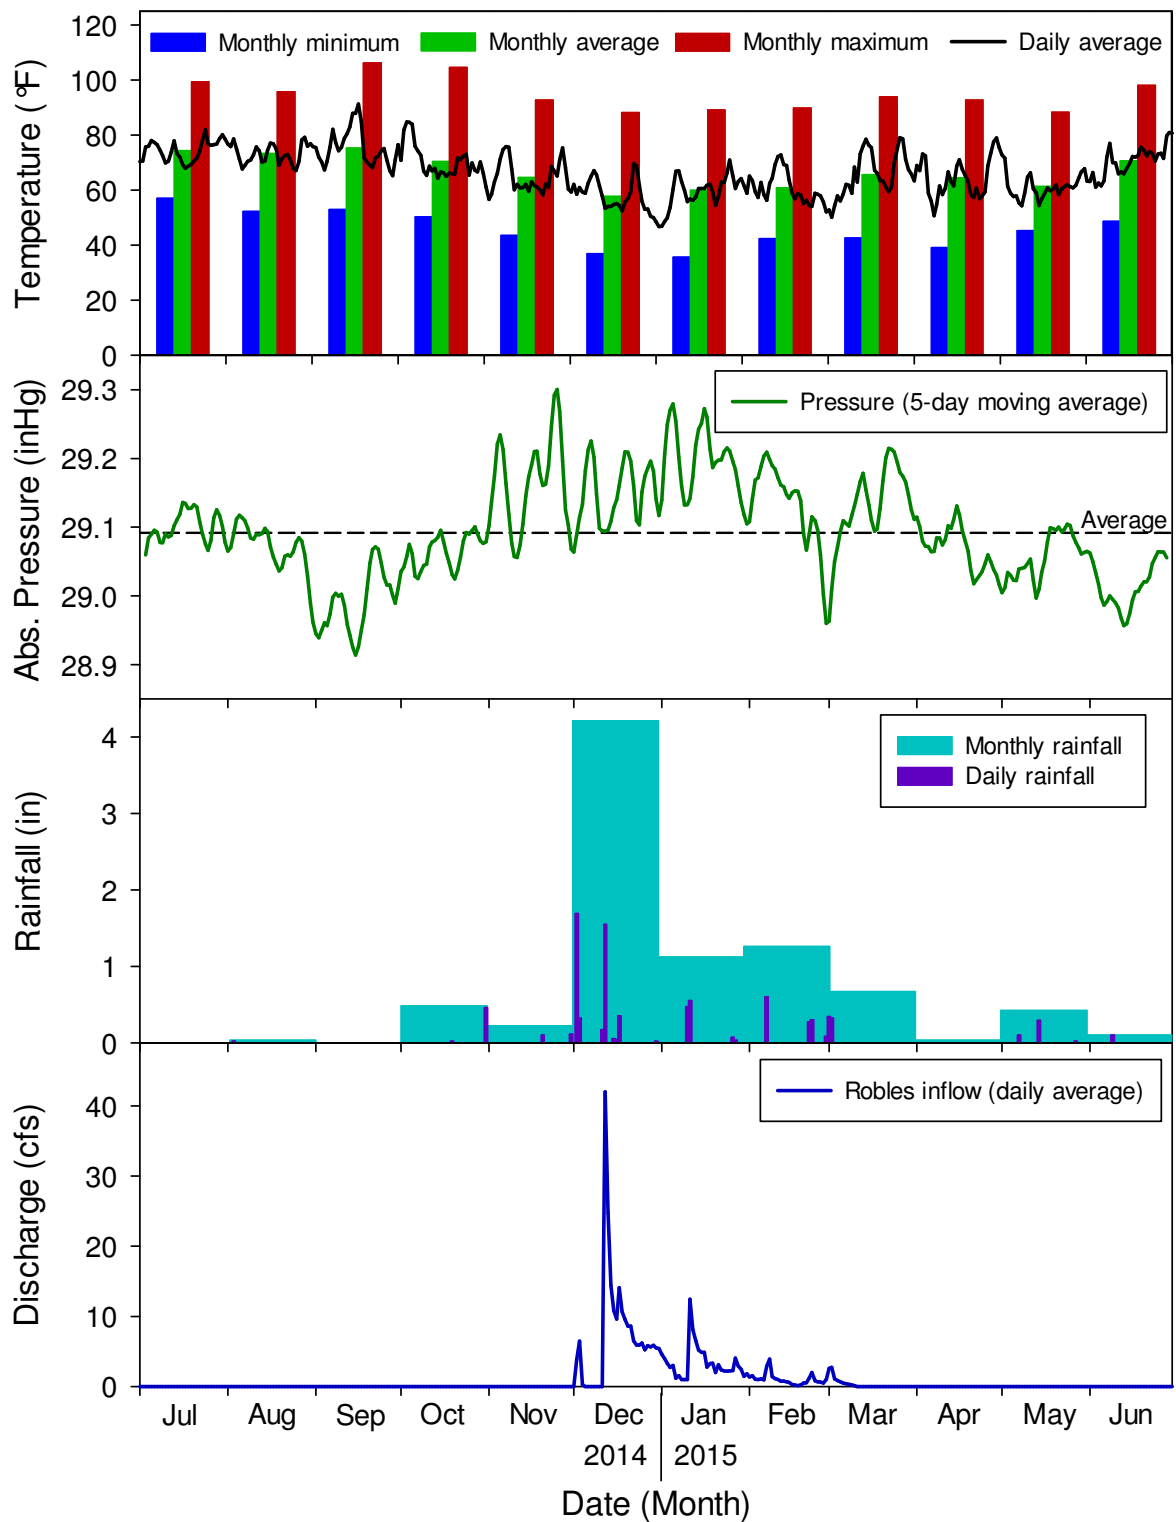

Appendix 17. Summary of weather and discharge data from the Robles Fish Facility for the reporting period.

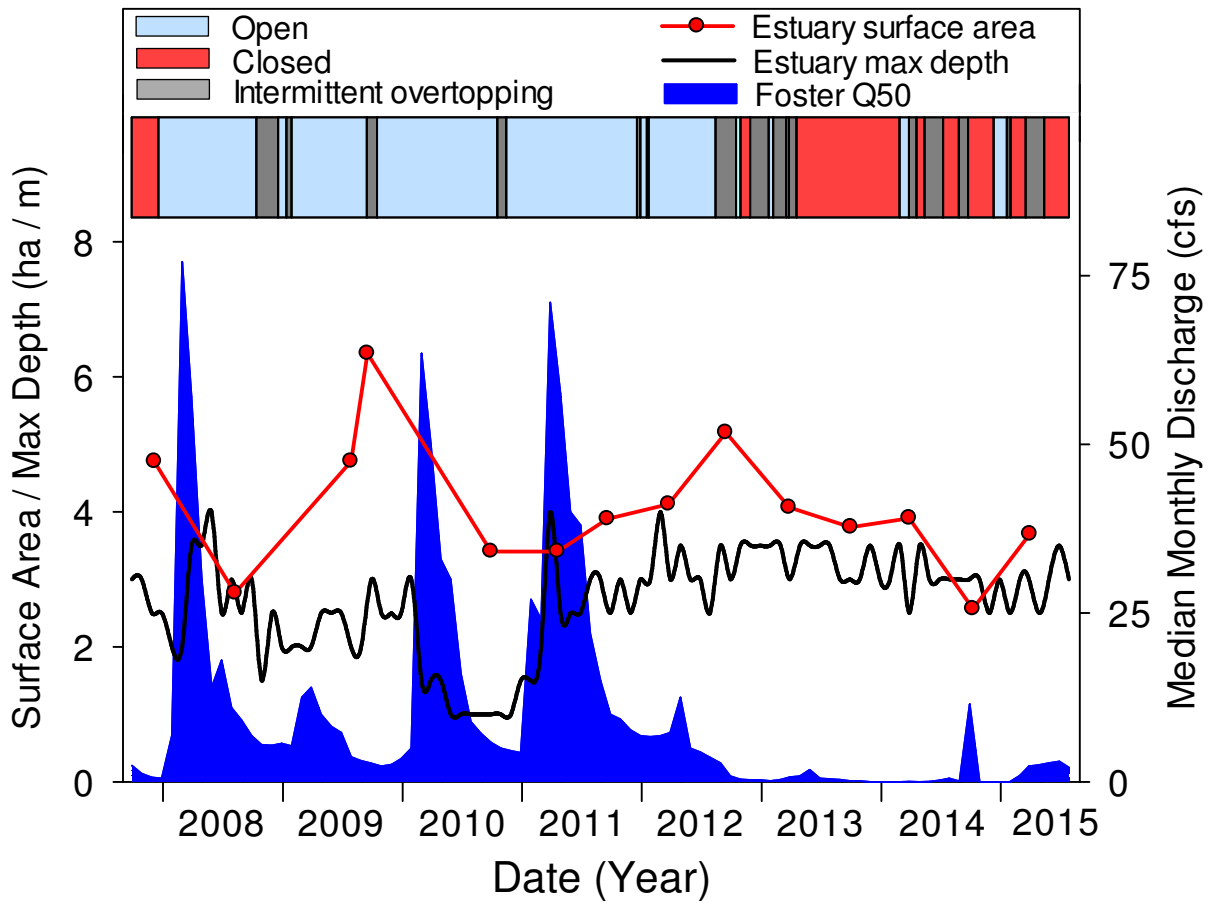

Appendix 18. Ventura River estuary/lagoon water depth, surface area, sandbar status, and discharge at Foster Park since 2008.

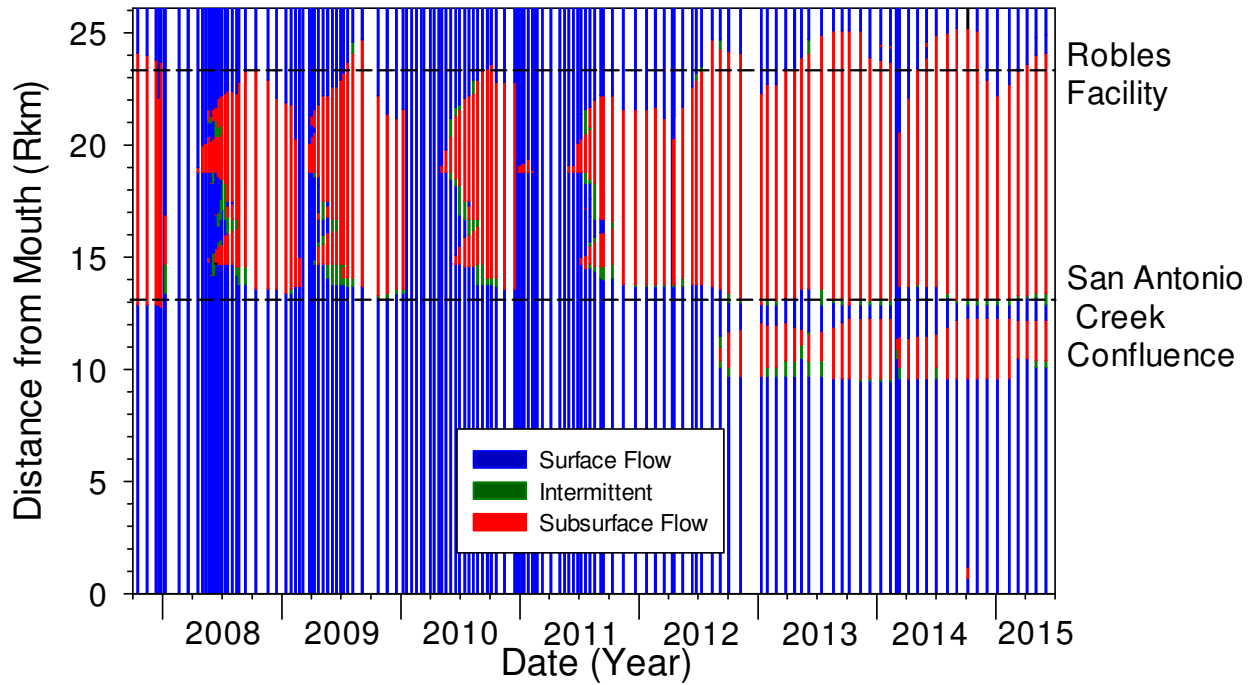


Appendix 19. Ventura River channel surface flow monitoring from 2008 to 2015.

Appendix 20. Photographic monitoring sites within the Ventura River basin.

Site Number	Site Description	Site Location <sup>a</sup>	Photo Direction	Frequency
1	Train bridge in estuary, east bank	V 0.3 km	Downstream	Biannual
2	Train bridge in estuary, west bank	V 0.3 km	Upstream Downstream	Biannual
3	Main Street Bridge	V 1.0 km	Upstream Downstream	Biannual
4	Shell Road Bridge	V 5.2 km	Upstream Downstream	Biannual
5	Casitas Vista Road Bridge (Foster Park)	V 9.7 km	Upstream Downstream	Biannual
6	Santa Ana Boulevard Bridge	V 15.5 km	Upstream Downstream	Biannual
7	Highway 150 Bridge	V 18.7 km	Upstream Downstream	Biannual
8	Robles Fish Passage Facility	V 23.5 km	Downstream	Biannual
9	Camino Cielo Road Bridge	V 25.7 km	Upstream Downstream	Biannual
10	Highway 33 Bridge at NF Matilija USGS Gauging Station	N 1.3 km	Upstream Downstream	Biannual
11	End of North Matilija Road	M 8.5 km	Upstream Downstream	Biannual
12	Highway 33 Bridge near Old Creek Road	S 0.3 km	Upstream Downstream	Biannual
13	Creek Road near Creek Lane	S 9.5 km	Upstream Downstream	Biannual
14	Santa Ana Road Bridge	C 0.4 km	Upstream Downstream	Biannual

<sup>a</sup>Site location is identified by the river or tributary system and kilometers from its confluence. C = Coyote Creek, M = Matilija Creek, N = North Fork Matilija Creek, S = San Antonio Creek, V = Ventura River.

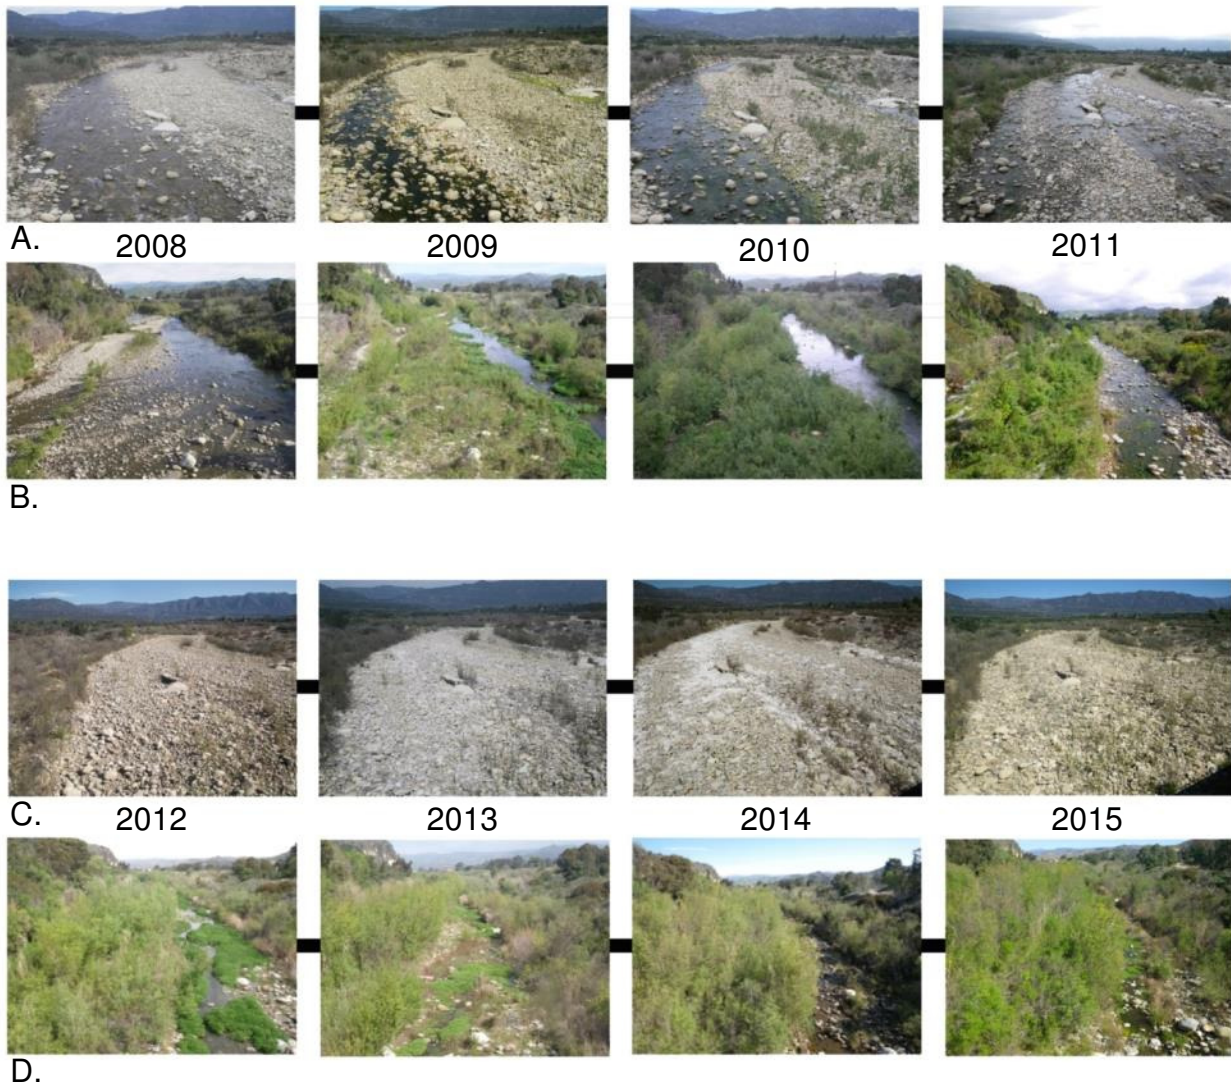

Appendix 21. Multiple year photo comparison of ephemeral and perennial reaches of the Ventura River. Photo series row A and row C are looking upstream from Hwy150 bridge. Photo series row B and row D are looking upstream from the bridge near the Shell Rd exit off Hwy 33.