

2018 Robles Fish Passage Facility Progress Report



The Thomas Fire of December 2017 burned approximately 90% of the Ventura River basin. The January and March 2018 storms produce significant erosion in the upper basin and high sediment runoff. Top photos compare pre Thomas Fire storm event (left) and post fire storm event (right). Bottom photos from left to right: Robles fish passage facility one day after the Thomas fire, settling cones used to measure total settleable solids and Thomas Fire burn map from Watershed Emergency Response Team.

Casitas Municipal Water District
1055 Ventura Avenue
Oak View, California 93022

TABLE OF CONTENTS

	Page
1.0 EXECUTIVE SUMMARY.....	4
2.0 GENERAL INTRODUCTION.....	5
3.0 UPSTREAM FISH MIGRATION IMPEDIMENT EVALUATION.....	7
3.1 <i>Sandbar Monitoring</i>	12
4.0 EVALUATE FISH MOVEMENT THROUGH THE PASSAGE FACILITY.....	15
4.1 <i>Water Velocity and Depth Validation Evaluation</i>	15
4.2 <i>Fish Attraction Evaluation</i>	16
4.3 <i>Downstream Fish Passage Evaluation</i>	19
5.0 DOWNSTREAM FISH MIGRATION THROUGH THE ROBLES REACH.....	20
6.0 LONG-TERM MONITORING COMPONENTS.....	22
6.1 <i>Monitor Robles Facility Operations</i>	22
6.1.1 Facility Status.....	22
6.1.2 Flow Observations and Control.....	23
6.1.3 Costs Associated with Operation and Monitoring.....	24
6.1.4 Water Velocity and Depth Validation Evaluation.....	25
6.1.5 Recommendations for Prioritization of Future Activities.....	25
6.1.6 Recommendations Deemed Necessary to the Operations.....	25
6.2 <i>Fish Passage Monitoring</i>	25
7.0 ADDITIONAL BIOLOGICAL AND ENVIRONMENTAL MONITORING STUDIES ...	31
7.1 <i>Oncorhynchus mykiss Presence/Absence Surveys</i>	31
7.2 <i>Adult Index Spawning Surveys</i>	32

7.3 *Ambient Water Quality Monitoring* 33

7.4 *Estuary/Lagoon Monitoring*..... 34

7.5 *Surface Flow Monitoring*..... 35

7.6 *Photographic Index Sites*..... 35

7.7 *Underwater Video Monitoring* 36

7.8 *Stranding Surveys* 36

8.0 LITERATURE CITED AND BIBLIOGRAPHY 37

9.0 APPENDICES 43

1.0 EXECUTIVE SUMMARY

Casitas Municipal Water District (CMWD) is implementing the Robles Fish Passage Facility Project (Robles Fish Facility) described in the Proposed Action of the Bureau of Reclamation's Biological Assessment (BA); (USBOR 2003). The effects of the Robles Fish Facility were analyzed in the Biological Opinion (BO) prepared by the National Marine Fisheries Service (NMFS 2003a). This 2018 Robles Fish Passage Facility Progress Report, as described by the BO, is the culmination of monitoring, evaluation, and operational data collected during the reporting period of 01 July 2017 to 30 June 2018.

The monitoring and evaluation studies related to the Robles Fish Facility conducted during the 2017-2018 reporting period are included in two main sections of this progress report. The Fisheries Monitoring and Evaluation section includes: upstream fish migration, impediment evaluation, sandbar monitoring at the mouth of the Ventura River, fish attraction evaluation, fish passage monitoring, downstream fish passage evaluations, and downstream fish migration through the Robles Reach. The Facility Operation section includes: information and data on the facility status, flow observations and control, costs associated with operation and monitoring, assessment of the effectiveness to provide fish passage, recommendations of priorities for future activities, and revisions deemed necessary to the operations.

Below normal precipitation occurred in the Ventura River Basin during the 2018 fish passage season. Two BO-defined storm events occurred and allowed data collection for the monitoring and evaluations of the Robles Fish Facility. The sandbar at the mouth of the Ventura River was open for approximately 80% fish migration season and provided opportunity for steelhead passage through the lower mainstem Ventura River. No *Oncorhynchus mykiss* were detected passing through the Robles Fish Facility during the fish migration period of 2018.

2.0 GENERAL INTRODUCTION

The National Marine Fisheries Service (NMFS) listed the southern California steelhead, *Oncorhynchus mykiss*, as endangered in 1997 (NMFS 1997) under the Endangered Species Act (ESA, 16 U.S.C. § 1531 et. seq.) of 1973, as amended. Steelhead were organized into stocks (i.e., groups) of evolutionary significant units (ESU) that were considered to be substantially reproductively isolated from other steelhead stocks and were an important part of the evolutionary legacy of the species. The southern California steelhead ESU included, at that time, steelhead populations from the Santa Maria River in San Luis Obispo County south to Malibu Creek in Los Angeles County. The ESU was later extended to the US/Mexican border in San Diego County during 2002 (NMFS 2003b). In a later delineating approach, NMFS categorized the anadromous life history form of *O. mykiss* as a distinct population segment (DPS) as described under the ESA (NMFS 2005). The DPS policy differs from the ESU by delineating a group of organisms by “marked separation” rather than “substantial reproductive isolation” as originally listed. In the case of *O. mykiss* of the southern California steelhead ESU, this marked separation between the two life history forms was considered valid because of physical, physiological, ecological, and behavioral factors related to its anadromous life history characteristics. Both resident and anadromous *O. mykiss*, where the two forms co-occur and are not reproductively isolated, are still part of the ESU; however, the anadromous *O. mykiss* (i.e., steelhead) are now part of a smaller subset identified as the southern California steelhead DPS. Anadromous *O. mykiss* in the southern California DPS exhibit a winter-run life-history pattern during their spawning migrations; see life history discussion below.

Rainbow trout (*O. mykiss*) can be generally organized into four large groupings (Behnke 1992; Scott and Crossman 1973): 1) coastal rainbow trout that extend from northern Baja California to northern Alaska near the Kuskokwim River and also the Kamchatkan Peninsula of northeastern Asia, 2) redband trout of the inland Columbia and Frazer River basins, 3) redband trout of the central valley of California, and 4) trout of the Gulf of California drainages. The taxonomic group of coastal rainbow trout, *O. m. irideus*,

exhibit two life history forms; anadromous and resident. The common name for the anadromous life history form is “steelhead trout” and the resident form are “rainbow trout”. Throughout the range of coastal rainbow trout, the anadromous life history form is widespread (Behnke 1992). There are two general life-history patterns exhibited by adult anadromous steelhead when they return from the ocean to spawn in fresh water. The patterns are grouped by either summer or winter spawning runs. There are many exceptions to this pattern, but this general characterization has been used to group steelhead runs by the season in which the peak spawning occurs as they return from the ocean (Busby et al. 1996). Summer steelhead are generally found in river systems that drain from farther inland, such as the Columbia River basin. Winter-run steelhead are typically found in the coastal systems where river systems are smaller. The winter-run pattern is the more common of the two anadromous life histories within the natural range of the species (Busby et al. 1996).

Monitoring and Research of the Robles Diversion and Fish Passage Facility

As stated in the BO (NMFS 2003a), the “Modifications to the Robles Diversion Facility and associated operation criteria have been targeted at improving fish passage conditions within the Robles Reach of the Ventura River while maintaining suitable conditions through the Fish Passage Facility.” The monitoring and evaluation studies and activities related to the modification of the Robles Facility, as outlined in the BO (NMFS 2003a), were intended to achieve three main objectives:

- I. Monitor Fish Passage Facility operations and performance.
- II. Determine if the Fish Passage Facility functions and operates in such a fashion that migrating steelhead:
 - a. Successfully navigate into and through the facility, and
 - b. Move through the facility in good physical condition.
- III. Determine if the operations at the Robles Diversion are enhancing the opportunity for:
 - a. Adult steelhead to migrate upstream to the Robles Facility, and
 - b. Smolts and kelts to migrate downstream through the Robles Reach.

5-year Reevaluation of Initial Evaluation and Monitoring Activities

As described in the BO, a 5-year reevaluation of the initial fish flow operations would be conducted to determine if monitoring and evaluations have been completed (NMFS 2003a). The initiation of the 5-year period began in 2006, which was the first year the Robles Fish Facility was fully operational. An annual and ongoing reevaluation began after the 2010 fish passage season. Through the Cooperative Decision Making Process, the Robles Biological Committee will review annually each of the specific evaluations and determine if the original objectives have been addressed and could be discontinued or if additional study would be needed. Due to the variable water conditions and insufficient numbers of adult and juvenile steelhead, all objectives of the monitoring and evaluation program have not yet been accomplished. This has been exacerbated by the historic 5-year exceptional drought affecting much of California, and particularly the southern coast of California including the Ventura River Basin. After the 2017 season, the drought in Ventura River basin had diminished to a moderate level, and continued into 2018. Each aspect of the monitoring and evaluation program will be assessed annually to determine if sufficient information has been collected to complete each objective. While significant progress has been made, it is recommended that several aspects of the monitoring and evaluation for the Robles Fish Facility be continued during 2019. Sufficient data have been collected for the upstream fish migration impediment evaluation to begin finalizing the results for incorporation into the long-term fish flow operations.

3.0 UPSTREAM FISH MIGRATION IMPEDIMENT EVALUATION

Introduction

The ability of adult steelhead to swim upstream can be impeded during migration at times of low-river flow (NMFS 2003a). Evaluations at shallow water habitat units (i.e., critical riffles) have been commonly used as a method to determine if impediments exist for adult and juvenile steelhead in California rivers (Dettman and Kelley 1986; Bratovich

and Kelley 1988; Hagar 1996). The Robles Reach, which extends downstream from the Robles Fish Facility approximately 6.5 km (NMFS 2003a) to just upstream of the Santa Ana Boulevard bridge (Appendix 1), is a wide alluvial section of the Ventura River that is composed of active wash deposits of unconsolidated silt, sand, gravel, and boulders (Tan and Jones 2006). Due to this type of channel morphology and geology, alluvial channels like the Robles Reach have high infiltration rates that cause channel surface flow to rapidly recede and cease shortly after storm events (Cooke et al. 1992).

An initial assessment of potential passage impediments in relation to river discharge was completed by ENTRIX (1999). The physical characteristics of seven potential impediments were evaluated using the Thompson (1972) passage criteria. The Thompson (1972) passage criteria for adult steelhead at critical riffles is a water depth of 0.6 ft for 25% of the total transect width and a continuous portion equal to 10% of the total transect width. ENTRIX (1999) also evaluated the potential impediments using criteria of 0.5 ft and 0.6 ft depth for 25% of the total width and a total width of 8 ft for both depths. The resulting discharge required to meet critical criteria was estimated to be between 40 and 65 cfs. There have been several modifications to the Thompson passage criteria by other researchers; Dettman and Kelly (1986) on the Carmel River used a depth of 0.6 ft over a 5 ft continuous section, a criteria of 0.6 ft depth over an 8-ft section was used on the Santa Ynez River (SYRTAC 2000), and Harrison et al. (2006) used a criteria of 0.6 ft depth over a 10-ft section on the Santa Clara River. Thompson's (1972) depth criterion of 0.6 ft was not based on actual migration observations and was never validated as a minimum condition for passage. It has been observed that adult salmonids can successfully move through riffles shallower than the 0.6 ft criterion (Mosley 1982).

The objective of the impediment evaluation is to assess factors that may impede steelhead's ability to migrate to the Robles Fish Facility (NMFS 2003a). Because low-river flows have the potential to impede upstream fish migration in the Robles Reach, characterizing the effect of flows on critical riffles in this reach will be the primary focus of the impediment evaluations (NMFS 2003a).

Methods

Selected channel features that may pose an impediment to upstream passage were surveyed multiple times during the fish migration season (January through June) to measure water depth, velocity, and channel width along a transect at each site. The selected sites were planned to be surveyed over a range of discharges from approximately 30-171 cfs (the upper limit is dependent on the ability to safely conduct the surveys), which was correlated with discharge at the Robles Fish Facility. The number of repeated surveys has depended on the number and duration of significant rain events, rate of hydrograph recession, and time constraints due to other aspects of the monitoring and evaluation program. Impediment surveys have been conducted over a number of years given the natural variation of water conditions. The selected impediment sites (Appendix 2) were resurveyed multiple times to develop a statistically rigorous data set, given the natural variability, to evaluate fish passage in relation to Robles Fish Facility discharge.

Site Selection Process

During the initial phase, the Ventura River was surveyed from the mouth to the Robles Fish Facility (23 km) using standard stream survey techniques and was completed in 2008 (CMWD 2008). This provided physical measurements of all habitat units for the selection process. The survey methodology followed Moore et al. (2002) and was equivalent to a level IV survey as described in the California Salmonid Stream Habitat Restoration Manual (Flosi et al. 2002).

Over the course of three meetings and one conference call between 24 January and 18 June of 2009, the Biological Committee (BC) for the Robles Fish Facility completed an impediment site selection process that culminated in the original selection of eight sites that would be monitored for the impediment evaluation. The BC reviewed physical parameters of the 379 habitat units surveyed and general river characteristics that included: unit type, length, width, water depth, slope, longitudinal location (river km),

step height on step units, discharge at Foster Park and the Robles Fish Facility at the time of the surveys, and a river profile for the 23 km of the Ventura River below the Robles Fish Facility. Upon completion of initial assessment of the data, a list of potential sites was developed that the BC visited in the field on 27 May 2009 to determine if monitoring was warranted. This data and field assessment included regular BC members (at the time of the assessment) Mike Kinsey (BOR), Stan Glowacki (NMFS), Mary Larson (CDFW), and Scott Lewis (CMWD). Mike Gibson (CMWD), hydrologists Bob Hughes (CDFW), and David Crowder (NMFS) also participated in this assessment and selection process.

A flow event that peaked on 20 March 2011 at approximately 20,000 cfs at the USGS Foster Park gage station, a recurrence interval of about 6 years, significantly altered some impediments sites that necessitated modifications to the monitoring. See CMWD (2011) for a detailed description of the high-flow caused site alterations. A Biological Committee (BC) field assessment on 11 January 2012 was conducted to review alterations that occurred and select replacement sites for ones that no longer appeared to be impediments. Regular BC members (at the time of the assessment) Ned Gruenhagen (BOR), Rick Bush (NMFS), Mary Larson (CDFW), and Scott Lewis (CMWD) participated in this review and site-selection process; Mike Gibson (CMWD) and hydrologist Bob Hughes (CDFW) were also involved in this assessment and selection process. Based on this field review, Site 2 was no longer considered a potential impediment. Site 10 was identified as a replacement site during the January field trip. Site 8, which was originally selected during dry conditions, was not considered as restrictive as other potential sites after evaluating data collected during 2010 and 2011. Consequently, Site 8 was replaced with Site 9 during the January 2010 field trip. The complete list of current impediment sites that the BC visited and determined to be satisfactory for monitoring during the 2012 season can be found in Appendix 2. However, at the time new site selections were made (i.e., 11 January 2012), insufficient flows were available to make final site selection or transect placements. Until March of 2014, the lack of precipitation and subsequent insufficient surface flow, did not allow for confirmation of these new sites. This confirmation was completed after the March 2014

storm provided the first notable surface flows in 3 years and allowed available members of the BC to visit sites 9 and 10 on 03 March 2014. The confirmation was conducted by Scott Lewis (CMWD), Dana McCanne (CDFW), and Mike Gibson (CMWD).

ENTRIX Study Site Assessments

An effort was made to locate and determine the status of the ENTRIX (1999) study sites during 2009. Because there were numerous bed-mobilizing runoff events after the study was completed, the current status of all study sites was unknown. Based on the site descriptions in the ENTRIX (1999) study report, field surveys were conducted to locate and describe the existing channel conditions at the original site locations. Of the 7 sites originally identified by ENTRIX (1999), only 4 sites were located with any degree of certainty. Of those 4 sites, all were no longer in the primary low-flow channel. A more detailed description of the ENTRIX sites can be found in a previous progress report (CMWD 2011).

Results

During the reporting period for 2018, two BO-defined storm events occurred. During the periods after the storms, a total of 10 water depth transects were completed. The 10 transects were focused on Robles discharges where data have not been collected to improve modeling results (Appendix 3). Highly dynamic flows that quickly receded limited the time for measurements and the discharges that data could be collected during the two BO-defined storms.

Data were analyzed by modeling discharge from the Robles Fish Facility and water depth at each site for the five passage criteria. This produced five criteria discharges and are included in this progress report to provide the current status of data collection for each impediment site. Given that 5 seasons of data have been collected over a range of discharges through 2018, all impediment sites were pooled individually across all years for this initial step of final analyses. Pooling the data broadly characterized the

full range of data collected at the different impediment sites across a range of hydrologic conditions. All previous impediments have been included for this initial analysis.

The impediments sites: 2, 3-1, 3-2, 4, 5-1, 5-2, 6, 7, 8, 9, and 10 have been included in this report (Appendices 4-14). Regression statistics for the five passage criteria discharge at Robles are provided in Appendix 15. The calculated minimum discharges to meet the five passage criteria correlating Robles discharge and model results at a Robles discharge of 50 cfs can also be found in Appendix 15.

Discussion

Exploratory data analyses are needed to determine the most appropriate and informative methods for analyzing the data, including data pooling, data transformations, other model explorations, outlier determinations, and final model ranking and selection. This process will proceed on a parallel track within the BC, culminating in a recommendation to the Management Committee based on the BC's interpretation of the results.

3.1 Sandbar Monitoring

Introduction

The Ventura River, like many other California rivers, frequently develops a seasonal sandbar at the mouth during the late spring or summer that is breached by higher river flows in the late fall or winter. If a sandbar develops, which occurs more often during dry years, the resulting lagoon can provide important rearing habitat for steelhead juveniles because of the abundant food resources available. Additionally, this can facilitate the physiological and behavioral changes associated with smoltification (Cannata 1998) and also enhance marine survival (Bond et al. 2008).

The primary objective of the sandbar monitoring is to determine if the criteria for initiation of the fish passage augmentation season have been met (NMFS 2003a). As

stipulated in the BO, the fish passage augmentation season will extend from 01 January through 30 June of each year and will commence after the sandbar has been breached at least once during the current year's fish flow operations season. During the fish passage augmentation season, several Robles Fish Facility operation criteria must also be implemented (see NMFS 2003a for a complete list of operational criteria).

Methods

During each sandbar inspection, observations and recordings were made that included: date, time, status of the sandbar, general location of the mouth, tidal stage, water temperature, and discharge at the Robles Fish Facility and the USGS Foster Park gage station. The sandbar was closed on 01 January 2018 and its status was monitored once every two weeks through June. Outside of the fish passage augmentation season the sandbar was monitored at least monthly.

Results

During the reporting period, July 2017 through June 2018, the mouth of the Ventura River was inspected 25 times to determine if the sandbar was open or closed. There were 14 observations that occurred during the fish passage augmentation season (January through June 2018) and 11 observations outside of the season. The sandbar was open on 09 January 2018 through 25 May 2018 for volitional fish passage (Appendix 16). On the days the sandbar was inspected during the reporting period, the mean daily discharge at the USGS Foster Park gage station and the Robles Fish Facility ranged from approximately 0 to 1,380 cfs and 0 to 31 cfs, respectively. When the sandbar was open, the river was observed primarily exiting from the west side of the estuary during the reporting period.

Discussion

The sandbar at the mouth of the Ventura River tends to remain open during average and above average precipitation years and closes only during years with few significant rain events (Lewis et al. 2010). This typical pattern of the sandbar remaining open during the fish passage season is illustrated from 2006 to 2018 (Appendix 17). The pattern commonly includes a period, during the summer and fall, when the sandbar is closed. A single low precipitation year can produce a longer period of closure, as occurred in 2007, 2012, and 2016. Consecutive dry years may cause a closure to persist into the fish passage season, only opening during short periods following rain events, such as in 2013 through 2015.

The tendency of the sandbar to remain open during the fish passage season, in all but very dry years, is likely due to a several factors. Although the middle reach of the Ventura River goes dry every year, during most years subsurface water continues to flow and eventually begins to resurface just upstream of the confluence with San Antonio Creek and continues to increase slightly proceeding downstream. Additionally, tributary flow from San Antonio Creek also adds to the Ventura River through a surface or subsurface connection throughout the year. Finally, treated effluent water from the Ojai Valley Sanitary District at rkm 7.5 increases the river discharge by approximately 3 cfs. Together, these hydrologic factors contributed water to the Ventura River and likely keeping the sandbar from fully forming and therefore remaining open during most fish passage seasons, which is approximately 77% of the time.

The status of the sandbar indicates changes in the estuary/lagoon that may help determine potential entry and exit conditions for adult steelhead and juvenile *O. mykiss* migrating to the ocean. It appears that passage conditions remain suitable during most seasons when steelhead are typically migrating. However, lagoon conditions optimal for juvenile rearing (i.e., when a sandbar closes and results in an estuary forming a deeper freshwater lagoon; Bond et al. 2008), appear to have been limited during years with potential smolt recruitment for the study period beginning in 2006.

4.0 EVALUATE FISH MOVEMENT THROUGH THE PASSAGE FACILITY

4.1 *Water Velocity and Depth Validation Evaluation*

Sufficient flows into the Robles Fish Facility occurred during the 2017-2018 season for data collection for the performance testing evaluation. The top four priorities at low flow (i.e., 30-50 cfs), as determined by the BC for the 2018 study year, were completed.

The fish ladder entrance water velocities were measured at three different discharges, 35, 44, and 72 cfs. The mean velocities were 2.6, 2.9, and 4.8 ft/sec, respectively. The goal was to measure velocities that included 171 cfs (i.e., the Aux at 121 cfs + 50 cfs in the fish ladder), it was decided to collect a set of measurements at the available 72 cfs since the larger discharge was not available. The 72 cfs was close the theoretical maximum discharge of 75 cfs that can be passed through one gate before a second gate is needed. All measurements were collected at gate 5, which is the primary gate operated at flows below 75 cfs.

Velocity measurements were collected at each of the 15 fish ladder slots at 34 cfs. The mean velocity for all 15 slots was 6.7 ft/sec (95% CI \pm 0.17, n = 90). In addition, water velocity measurements were collected at the low-flow fish exit. At 26 cfs, the mean velocity at the exit was 1.3 ft/sec (95% CI \pm 0.3, n = 6).

No velocity measurements were collected for the high-flow objectives due to the quickly receding hydrograph of the post-fire storm peaks. Due to the past logistical issues of getting a consultant and needed acoustical equipment on site during previous storms, Casitas purchased an acoustic Doppler current profiler (ADCP) by Teledyne and began testing in the entrance pool at low flow during 2018. Casitas plans to use this ADCP for future high-flow velocity measurements. A full report of the Water Velocity and Depth Validation Evaluation will be completed once data collection has been completed for all tasks the BC determines necessary.

4.2 Fish Attraction Evaluation

Introduction

River discharge has been shown to be one of several key environmental factors initiating and facilitating steelhead, and other salmonids, adult and juvenile migrations in natural fluvial environments (Shapovalov and Taft 1954; Banks 1969; Spina et al. 2005). As adults and juveniles approach fish passage facilities, suitable discharge and water velocities become even more important to ensure successful passage through any facility (Clay 1995; Beeman and Maule 2001).

The entrance of the fish ladder at the Robles Fish Facility is located approximately 20 m downstream of the spillway gates and is where fish migrating upstream enter and where fish migrating downstream exit the facility (i.e., two-way passage facility). The downstream end of the ladder is adjacent to a large pool (entrance pool). The ladder was designed for a maximum discharge at the exit of 171 cfs (50 cfs through the entire ladder and an additional 121 cfs that can be supplemented at the lower end of the ladder). The distance downstream from the entrance pool to the lower most rock weir is approximately 200 m. This reach includes all four rock weirs and the facility's discharge measurement weir, which also functions as a low-flow road crossing. The habitat unit types that can be used by migrants in this reach include the four pools created by the weirs, a glide created by the discharge measurement weir, a riffle, and the entrance pool.

The objective of the fish attraction evaluation is to determine if adult or juvenile steelhead are holding immediately downstream of the Robles Fish Facility during the fish passage augmentation season (NMFS 2003a).

Methods

Three separate methods were employed to determine the presence of *O. mykiss* for the Fish Attraction Evaluation to encompass a range of spatial and temporal scales. The methods used included: 1) Weekly bank/snorkel survey during the fish passage season, 2) post-storm bank/snorkel surveys in the entrance pool during the BO-defined ramp-down period, and 3) post-storm underwater video monitoring at the fish ladder entrance during the ramp-down period.

1) Weekly bank/snorkel fish attraction surveys, a methodology used since 2007, were conducted during the fish passage season from January through June of 2018 when water was present. During 2018, the two storms created surface flows and allowed surveys to be completed for approximately 6 months. The particular survey methodology used (i.e., bank or snorkel) was determined based on water visibility, river discharge, expected steelhead life history stage present at the time of the survey, and safety of surveyors. A combination of bank and snorkel surveys were conducted during the 6-month period. Bank surveys were conducted by one or two surveyors in an upstream direction. The surveyors wore polarized sunglasses to reduce water-surface reflection. Snorkel surveys were conducted by one or two surveyors in an upstream direction. If present, fish species were identified and enumerated to the greatest extent possible permitted by the ambient river conditions and fish densities at the time of each survey. If *O. mykiss* were present, lengths of each fish was estimated to the nearest cm if only a few individuals (generally <10) were present. In order to collect additional information that may help determine *O. mykiss* upstream and downstream movements through the Robles Fish Facility, an upstream study reach was added in 2009. The upstream study reach included observations in the screenbay of the facility and the area immediately upstream of the low-flow fish exit in the forebay. The total distance of this upstream reach was approximately 140 m.

2) Post-storm bank/snorkel surveys were conducted in the entrance pool during the ramp-down period for all BO-defined storms. This consisted of daily surveys during the

10-12 day augmentation period after a storm event. Beginning the day after a BO-defined peak event, a Secchi depth was measured in the entrance pool to determine when surveys could begin. Bank surveys were conducted when visibility was poor and snorkel surveys were conducted after visibility increased (> 1.0 m Secchi), assuming this would allow *O. mykiss* to be observed.

3) The post-storm underwater video monitoring was conducted after a BO-defined storm and during the ramp-down period. After the storm event occurred, video cameras were installed at the entrance of the fish ladder. The video cameras were mounted on a bracket adjacent to the fish ladder entrance and lowered into place to provide monitoring following the storm event. The cameras recorded the entire 10-12 day ramp-down period to a digital video recorder (DVR) and reviewed at a later date.

Results

1) A total of 38 surveys (34 bank and 4 snorkel) were completed during the weekly surveys and no *O. mykiss* were observed (Appendix 18). During the 6-month period, a total of 7,600 m were surveyed by either bank or snorkel methods. Water temperatures during the study period ranged from 10 °C to 24 °C and turbidity ranged from 2 to 1,054 NTUs when the surveys were conducted. The mean daily discharge at the Robles Fish Facility ranged from 3 to 77 cfs at the time of the surveys.

2) There were two BO-defined storm events in 2018, but only the March storm had sustainable flows so that a release could be conducted. A total of 14 surveys were conducted for the March post-storm fish attraction survey and no *O. mykiss* were observed (Appendix 19). Water temperatures during the study period ranged from approximately 13 °C to 17 °C and turbidity ranged from 304 to 2,952 NTUs when the surveys were conducted. The mean daily discharge at the Robles Fish Facility ranged from 22 to 236 cfs at the time of the surveys.

3) Post-storm underwater video monitoring could not be conducted during the two BO-defined storm events. Turbidities were too high for the camera to operate in during the 10-12 period of any release downstream.

4.3 Downstream Fish Passage Evaluation

Introduction

Passage evaluations of salmonids migrating through fish passage facilities have been conducted throughout the western United States for many years (Odeh 2000). Methods to determine if a facility is operating as designed and not causing harm to the intended fish species vary. Early work typically entailed trapping and tagging fish before entering a facility and recapturing them after exiting. Trapping and visual inspections for injuries, PIT tagging, radio telemetry, and acoustical telemetry have been conducted extensively as well.

There are two objectives for the downstream fish passage evaluation. The first objective is to determine if downstream migrants are successfully passing through the Robles Fish Facility. The second objective is to capture and examine steelhead smolts and kelts and determine if injuries are occurring as they pass downstream through the Robles Fish Facility (NMFS 2003a).

Methods


For a full description of evaluation methods, see section 5.0.

Results

No *O. mykiss* were captured during trapping operations and evaluations for the Downstream Passage Evaluation could not be conducted. The trap was operated from 9 March 2018 (9 cfs) through 11 May 2018 (13 cfs), removed in anticipation and during

the March storm for 6 days, for a total of 56 days. Mean daily temperatures ranged from approximately 13 to 21 °C. Water velocity measurements were collected on the upstream side of the trap and wings to evaluate the new trap location closer to the Robles Fish Facility. The velocities increased from the channel margins to the thalweg (see table below). The margins ranged from about 0.0 to 0.04 ft/s, and in the thalweg, where the trap was located, from 0.55-0.95 ft/s. Water velocity measurements were collected at 0.5-m intervals upstream of the trap and guidance wings on 26 March at a discharge of 40 cfs. Mean water velocity across the upstream face of the trap/fyke was 0.71 f/sec (0.5 m-intervals) and velocity at the fyke opening was 0.62 f/sec.

	Distance	Depth			Velocity
	(m)	(m)	(ft)	(in)	(ft/s)
	6.0	0.20	0.66	8	0.00
	5.5	0.30	0.98	12	0.65
	5.0	0.22	0.72	9	0.05
	4.5	0.24	0.79	9	0.00
	4.0	0.36	1.18	14	0.00
	3.5	0.22	0.72	9	0.00
	3.0	0.40	1.31	16	0.35
	2.5	0.50	1.64	20	0.28
	2.0	0.52	1.71	20	0.10
	1.5	0.52	1.71	20	0.10
	1.0	0.50	1.64	20	0.37
Trap Location	0.5	0.52	1.71	20	0.95
	0.0	0.46	1.51	18	0.62
	0.5	0.38	1.25	15	0.55
	1.0	0.36	1.18	14	0.20
	1.5	0.36	1.18	14	0.23
	2.0	0.42	1.38	17	0.69
	2.5	0.48	1.57	19	0.14
	3.0	0.50	1.64	20	0.05
	3.5	0.44	1.44	17	0.04
	4.7	0.40	1.31	16	0.04



5.0 DOWNSTREAM FISH MIGRATION THROUGH THE ROBLES REACH

Introduction

When the number of fish physically handled in a study is of concern, such as with an endangered species, radio telemetry can be a useful method over others like extensive trapping (Hockersmith et al. 2000). Telemetry migration information of steelhead smolts in the Ventura River would allow for the determination of survival, travel time and rates

through select reaches, migration relative to river discharge, habitat use, and passage success through critical riffles. By tracking the tagged fish until the batteries die, it is anticipated that downstream migration can be monitored all the way to the Ventura River estuary/lagoon and could provide important data on estuary rearing and emigration behavior.

The purpose of the downstream migration evaluation is to determine how successful smolts are at migrating through the Robles Reach (NMFS 2003a). Because of the limited number of steelhead smolts likely passing downstream through the facility, a NMFS approved pilot study using radio telemetry was used for evaluations.

Methods

A weir trap was placed and operated approximately 40 m downstream of the Robles Fish Facility. The weir trap consisted of a live-box (120 cm for all three dimensions) with an internal fyke. The trap was situated in the center of the river channel and thalweg. The live-box internal frame was constructed of PVC pipe and covered with plastic fencing with 1.9-cm diagonal openings. A plastic fence (3-cm openings) supported by T-bar fence posts was extended upstream on both sides of the live-box at 30° angles into the river channel. There was a 1-m gap on the right bank so any adult steelhead could bypass the trap location and move upstream. Because the vast majority of downstream steelhead migrants were expected to be captured from mid-March through mid-June (Shapovalov and Taft 1954; Dettman and Kelley 1986), the trap was intended to be operated from mid-March through June 2018 or until water temperatures exceeded a daily mean of 22 °C, which could negatively impact captured fish (SYRTAC 2000), or the surface water connection was lost in the mainstem of the Ventura River. For a full description of evaluation methods, see the 2018 CMWD monitoring and evaluation study plan (Lewis et al. 2018).

Results

No *O. mykiss* were captured during the 2018 trapping operations. The trap was operated for 56 days from 09 March to 11 May 2018. The trap was removed for 6 days during the March storm event. The surface flow connection was lost on 11 May 2018 and trapping was discontinued.

6.0 LONG-TERM MONITORING COMPONENTS

6.1 *Monitoring Robles Facility Operations*

6.1.1 Facility Status

The Robles Fish Passage Facility started the 2017-2018 season in a fully functional mode. The 2017-2018 season was characterized by a below average rainfall year as measured at Casitas Dam. 9.96 inches of rain were measured at Casitas Dam during the October 2017-July 2018 period. The average annual rainfall at the dam is 23.30 inches. No water was downloaded from Lake Matilija to Robles and no valves were operated at Matilija Dam. Previous reports identified several projects to be completed or reported on current status. The principal projects were:

- Install repaired Sontek IQ Pipe flowmeter in the auxiliary water supply pipe. The flowmeters appear to be working as anticipated to date and there are no plans to change them and only continue to use and maintain them.
- Install level sensors at the fish ladder entrance to read water levels in the entrance pool. This item was not successfully completed due to sensor and SCATA limitations. It will remain an item to explore further by a qualified SCATA technician.
- Install new diffuser perforated plate for the fish screens and the auxiliary water supply. During the two BO-defined storms in 2018, the new diffuser perforated panels did not become obstructed with debris as before and appear at this time to have solved the issue. They will continue to be monitored during future storms.

6.1.2 Flow Observations and Control

Flow and level measurement devices are located at various locations within the Robles Fish Passage Facility. The primary points of measuring and recording stream flows entering, flowing through, and leaving the Robles Fish Passage Facility are:

- Matilija Creek at Matilija Hot Springs – located approximately 2,100 feet downstream of Matilija Dam – good rating for low to moderate flows – operated by Casitas Municipal Water District, formerly a USGS station; A second gaging station at this location is operated by the County.
- Matilija Dam Stage Bubbler-Located at the dam, this gage provides the lake elevation. Under high flows, the dam acts as a weir. This is one of the primary flow measurement locations and to determine if a peak has occurred.
- North Fork Matilija Creek – located approximately 3,000 feet upstream of its confluence with Matilija Creek – good rating for low to moderate flows – operated by the Ventura County Watershed District;
- Robles-Casitas Diversion Canal – located on the diversion canal approximately 1,300 feet downstream of the Robles headworks – trapezoidal channel with a good rating for flows up to 600 cfs;
- Ventura River near Meiners Oaks (VRNMO or Measurement Weir) – located approximately 540 feet downstream of the Robles Fish Passage spillway – concrete weir section – good rating to 100 cfs, use of equations above 100 cfs with no verifications at higher flows above 1000 cfs. This is the most reliable flow measurement for the fish passage and downstream releases with a 50-year plus history. This site was formerly a USGS site.
- Fish Ladder- A Sontek IQ Plus has been added to this location to measure flow in the fish passage operation and was nominal with ongoing assessment.
- Auxiliary Water Supply- A Sontek IQ Pipe has been installed to obtain flow measurements in the auxiliary water supply and was nominal with ongoing assessment.

All of the instruments can suffer from inaccuracies from time to time. The inaccuracies can be caused by clogging of bubbler lines, electronic creep, debris accumulating on sensors, changes to the measured cross sections, human interactions and equipment problems. For this reason, the data is verified against field measurements and observations. The information gathered from each of these locations has been reduced to the mean daily flows in cfs (Appendix 20). The mean daily Robles Fish Facility discharge and corresponding turbidity and temperature measurements for the entire Fish Passage Season are presented in Appendix 21. The weir bubbler data collector was operational during all BO defined peaks.

Surface flow over the measurement weir was first observed on January 9, 2018. Two BO-defined peak flow events occurred during the 2017-18 fish passage season. The first peak occurred on January 9, 2018. This peak was the largest for the season at about 9,000 cfs. There were only 5 days this year with some diversions.

6.1.3 Costs Associated with Operation and Monitoring

The BA/BO specified that the District provide the costs that are associated with the activity. The following is a summary estimate of the direct costs incurred by the District during the 2017-18 fiscal year:

- **Fisheries Monitoring:**

Salaries & Benefits	\$ 370,117
Equipment/Material	<u>\$ 18,867</u>
	\$ 388,984

- **Facility Operations:**

Salaries & Benefits	\$ 95,223
Equipment/Materials	\$ 14,535
Outside Contracts	\$ 0
Utilities	\$ 5,290
Permit	<u>\$ 0</u>
	\$ 115,048

- **Capital Improvements:**

No capital improvements were completed this year.

6.1.4 Water Velocity and Depth Validation Evaluation

Velocity tests were taken in the fish passage facility during the 2017-18 season as report above. The two BO-defined storm hydrographs receded too quickly to collect velocity data on tasks that required larger flows. All performance testing will be completed in general accordance with the NMFS approved Performance Evaluation Program and Biological Committee recommendations.

6.1.5 Recommendations Regarding the Prioritization of Future Activities

The District has completed its twelfth season with the Robles Fish Facility operational. An assessment of the current fish screens and cleaning system will be planned to determine if modifications can be made to improve fish passage and diversion operations.

6.1.6 Recommendations Deemed Necessary to the Operations

Casitas continues to recommend that the construction of the 15-weir portion of the project be put on hold at least until the Matilija Dam Removal Project is completed. Preliminary plans for the High Flow Sediment Bypass and High Flow Fish Passage portion of the Matilija Dam Removal Project require this area to be graded to new elevations. The existing temporary weir system has proven to be passable by adult *O. mykiss*.

6.2 *Fish Passage Monitoring*

Introduction

Monitoring of migratory fish moving through fish passage facilities has been conducted using many different methods that include: visual counting, trapping and hand counting, continuous video recording, PIT tagging, radio telemetry, and acoustical telemetry. In each fish passage application, the particular physical and biological conditions (e.g.,

variable discharge, turbidity, debris, size of facility, and number of fish) usually dictate which method would be most effective. New technologies have been employed to improve fish passage monitoring in turbid conditions specifically. One such monitoring device is the Vaki Riverwatcher[®] (Riverwatcher). The Riverwatcher has the capability to operate in greater turbidity than more traditional monitoring equipment. Because of this advertised capability, the Riverwatcher was selected to be used in the Robles Fish Facility by the Technical Advisory Group during original facility design.

The primary objective of fish passage monitoring is to provide a long-term index of upstream adults and downstream kelts migrating through the Robles Fish Facility (NMFS 2003a). Although the Riverwatcher has the ability to detect smolt-sized steelhead, the manufacturer recommends it for monitoring fish with body depths ≥ 40 mm (Vaki 2003). Consequently, it was not known how well it would work at detecting smolt-sized fish given the debris load of the Ventura River (NMFS 2003a).

Methods

Fish migrating upstream and downstream through the Robles Fish Facility were monitored using the Riverwatcher. The Riverwatcher is located in the fish bypass channel, which is the channel between the fish ladder and fish screens. The Riverwatcher consists of two scanner plates with light diodes that transmit beams of infrared light through the water to a corresponding receiver plate. When a fish swims (or debris drifts) through the infrared light beams, it breaks the light signal and a digital silhouette of the fish is recorded on a computer. Other data recorded when the Riverwatcher scanner is triggered are: date and time, total length (TL) of the fish (from a length/height ratio), swimming speed (m/sec), and direction of the fish movement (upstream or downstream). In addition, the scanner triggers an underwater camera to record a 10-second video clip (25 frames/sec).

The Riverwatcher was experiencing technical issues of malfunctioning video during the 2015 monitoring season. In the fall of 2015 the Riverwatcher was sent to Vaki for

servicing. Through diagnostic testing, Vaki concluded no repairs were necessary and did not experience any issues with malfunctioning video. Vaki stated recent improvements to the Riverwatcher system could be integrated into older systems, and recommended upgrading the Robles Riverwatcher. This recommendation was discussed and approved by BC members at the 2015 committee meeting. The primary upgrade was changing from an analog camera to a digital camera. In conjunction with updated software, the camera now records video for both upstream and downstream detections. Additional upgrades to the Riverwatcher included: white and infrared lights, cabling, multiplexor, and power supply. To improve video detection of fish, an additional camera was installed and is located upstream of the Riverwatcher scanners in an aluminum tunnel below the Riverwatcher camera. A second DVR camera is located above the Riverwatcher and pointed at the scanner plates. These two DVR cameras are independent of the Riverwatcher system and have to be reviewed separately for detections. The digital cameras recorded continuously at 12 frames/sec and capture about 5 weeks of data until the DVR data storage drive is full. Once the DVR memory is full, it can be exchanged with a second DVR and data can be reviewed.

The Riverwatcher scanner and cameras are positioned at the bottom of an aluminum frame (crowder) covered with 1/2 inch aluminum bars, spaced 1 1/2 inches on center resulting in 1-inch spacing between the bars, which directs the fish to swim between the scanner plates. The crowder can be raised and lowered in guide slots of the fish bypass channel with the aid of an A-frame hoist for cleaning or repair. The Riverwatcher is usually operated during the entire flow augmentation season as long as sufficient water elevations in the fish bypass are present and debris and turbidity are low enough so that the crowder will not be damaged and the Riverwatcher will function.

Typically, during times of higher debris, the cleaning and inspections occur multiple times per day, and at times of lower debris, cleaning and inspections occur only once every 2-3 days. At times of very low flow (< 1-2 cfs), the crowder may only be cleaned once per week. The crowder was removed for cleaning for a combined total of approximately 4 h during the operation period. The Riverwatcher was operated a total

of 126 days, 99.9% of the time the Riverwatcher could be operated during the fish augmentation period when turbidity was low enough, this includes times of low flow (approximately < 3-5 cfs) when fish passage is not possible.

Prior to 2010, each upstream and downstream Riverwatcher detection was reviewed and classified as either: an adult steelhead, *O. mykiss* non-adult steelhead, other species if identifiable, unknown fish, fish probable, or false detection (see Appendix 22 for detection classification flow chart). At the request of NMFS, this classification system was modified during the review process of the 2010 progress report. It is NMFS' belief that supporting data do not exist to distinguish between the resident and anadromous forms of steelhead. All confirmed *O. mykiss* were classified solely as *O. mykiss*. The classifications were determined by using a combination of the silhouette images, estimated lengths, and video clips. In addition, if larger adult sized *O. mykiss* were detected and a useful video clip was recorded, measurements of eye diameter and standard length (SL) were estimated from the video clip to calculate morphometric ratios that were compared to known steelhead and rainbow trout.

A commonly used morphological method to discriminate differences is to develop ratios of body measurements for comparison to remove the effects of body size (Strauss and Bond 1990). This is done by comparing SL to the ratio of eye diameter in linear regression. Standard length is the length from the snout to the end of the hypural plate near the end of the fleshy caudal peduncle, which is unaffected by caudal fin deformities (Anderson and Neumann 1996).

Before 2010, the adult steelhead classification was used if the fish observed was an *O. mykiss* and displayed the typical characteristics of an anadromous adult steelhead, such as black spotting on dorsal, adipose, and caudal fins, black spotting on dorsal side of body, silvery body, vertical edge to caudal fin, ≥ 38 cm TL (Shapovalov and Taft 1954), and had an eye diameter/SL ratio ≤ 0.045 (CMWD 2008). The new classification method may include juvenile resident, smolts, adult resident, and adult anadromous *O. mykiss* migrating throughout the basin. Conceivably, after more data are collected from

the downstream trapping component, or from other Ventura River basin research projects, a more thorough classification system of Riverwatcher detections could be used again.

The “fish unknown” classification was used if a detection was identified to be a fish based on video evidence, but further classification could not be determined due to high turbidity or an inadequate amount of the fish captured within the camera’s field of view. The “fish probable” classification was used if no fish was observed in the video, but the silhouette was similar to that of a typical fish silhouette confirmed by video evidence. Even with reasonably good video coverage, smaller fish are still able to pass through the Riverwatcher undetected by the video cameras. This occurs if fish swim very close, high, or low relative to the cameras. In addition, this can happen if a fish swims upstream through the scanners but stops before entering the video field of view. High turbidity can also obscure the video detection and identification of fish. The “false detection” classification was used when no fish was observed in the video and the silhouette was not similar to that of a typical fish silhouette. Because false detections tended to occur frequently during higher discharges, when turbidity and debris also were high, it was likely that most false detections during these periods are caused by debris, high turbidity, and water turbulence. A second video camera is directed at the Riverwatcher scanner plates to help determine the cause of many of the false detections. After reviewing selected times where many assumed false detections occurred, it was concluded that debris, air bubbles, and turbulence were indeed the source of the detections. During low-flow periods (<10 cfs), 99.9% of the time the Riverwatcher was operating, surface water turbulence was likely the cause of most false detections. When turbidity exceeds about 100 NTUs, hundreds of false detections can occur per hour due to high concentration of suspended solids breaking the infrared beams of the scanner plates. When turbidity is less than about 100 NTUs, false detections from suspended solids are not as frequent, but poor camera visibility does not always allow for video confirmation, depending on how close to the camera that a fish swims during passage. Once the turbidity falls below about 25-30 NTUs, turbidity does not limit the Riverwatcher’s capability for detecting and confirming fish (Table 1).

In spring 2016, the Riverwatcher was tested in an above-ground pool with wooden fish silhouettes at varying water turbidities. This was intended to simulate natural stream conditions to provide further resolution of the operational capabilities of the Riverwatcher (Lewis et al. 2016).

Table 1. Riverwatcher general operational status for ranges of water turbidity (NTUs).

Approximate Turbidity (NTUs)	Riverwatcher status
> 200	Not functional
100-200	Many false scanner detections, not fully functional
30-100	Scanner functional, but unable to confirm with video
< 30	Scanner functional, grid detectable for video confirmation

A standardization test for the Riverwatcher was developed using wooden silhouettes of a typical smolt and adult steelhead. To confirm the Riverwatcher is functioning correctly, this test was conducted before the Riverwatcher was operated during the 2016 fish passage season. A more detailed description of this test can be found in Lewis et al. (2016).

Results and Discussion

The Riverwatcher was operated from 12 January 2018 to 30 June 2018 of the reporting period. However, due to the high turbidities from the post Thomas Fire storms, the Riverwatcher could not operate for 43 days during this time (26% of the time). During the 2018 fish migration season, the Riverwatcher did not detect *O. mykiss* passing through the Robles Fish Facility (Appendix 23). False detections were recorded by the Riverwatcher, of which 546 were upstream and 740 were downstream. During this fish passage season, the crowder was removed from the fish bypass channel and cleaned or inspected 17 times.

The 1,286 false detections recorded by the Riverwatcher were assumed to be caused from turbidity, debris, turbulence, air bubbles, and settings of the Riverwatcher to detect

smaller fish. The review of the second DVR camera directed at the Riverwatcher scanner plates provides confidence that these are the likely cause of false detections. None of the detections produced silhouettes that appeared to be fish based on previous experience operating the Riverwatcher. In the event that one of these silhouettes could have been caused by a fish, all detection video clips created by the Riverwatcher were reviewed and no fish were observed. For the 2018 season, the minimum threshold height remained at 28 mm so that a large number of false detections could be eliminated while still attempting to detect steelhead smolts. Based on available data from the Ventura Basin, a height of 28 mm was determined to be similar to some of the smallest steelhead smolts expected to emigrate downstream through the Robles Fish Facility. This height corresponds to 146 mm TL and 139 mm FL. The estimated fish detection rate from a Riverwatcher verification study indicated that up to 93% of smolt sized *O. mykiss* will not be detected by the Riverwatcher (Lewis et al. 2016). Additionally, it was concluded that larger-sized fish (i.e., height > 80 mm) appeared to be detected nearly 100% of the time. This height is equal to about 475 mm TL. Shapovalov and Taft's (1954) 9-year study documented only 4% of the total number of adult steelhead were smaller than 475 mm. Therefore, the number of small adult steelhead that may not be detected would likely be low. However, the vast majority of adult steelhead would be detected.

7.0 ADDITIONAL BIOLOGICAL AND ENVIRONMENTAL MONITORING STUDIES

7.1 *O. mykiss* Presence/Absence Surveys

Methods

In addition to the fish attraction monitoring, *O. mykiss* relative abundance index surveys were conducted in the Ventura River mainstem between the Robles Fish Facility and the Ventura River mouth and San Antonio Creek. Surveys were conducted upstream of the Robles Fish Facility in Matilija and North Fork Matilija creeks. These additional sites were surveyed using both bank and snorkeling methods (depending on water conditions

and expected life history stage) but were conducted primarily after storm events for adults and during the rest of the year for smolts, parr, and fry. Methods to estimate fish size and numbers were the same as those used in the fish attraction evaluation. A total of 14 sites were monitored and both pool and riffle habitat at each site were included (Appendix 24). These additional areas were surveyed to determine if adult steelhead were entering the Ventura River, migrating upstream, holding and spawning, and if they were successfully passing through the Robles Fish Facility. Also, juvenile *O. mykiss* (smolts and residents) were surveyed to learn spatial and temporal patterns.

The sites were initially selected based on ease of access, coverage of basin, and presumed chance of detecting *O. mykiss*. However, after all habitat surveys were completed, site selection was also based on quantitative measurements identifying high-quality habitats used for *O. mykiss* juvenile rearing and adult holding.

Results

Peak snorkel counts within each year have generally been between 350 and 400 *O. mykiss* until 2013. Due to the exceptional 5-year drought, the peak numbers of *O. mykiss* have dropped substantially (Appendix 25). The peak count of *O. mykiss* was only one fry during 2018, which was from the 2018 cohort in San Antonio Creek.

7.2 O. mykiss Index Spawning Surveys

Methods

Spawning surveys were conducted throughout the Ventura Basin that is accessible to adult steelhead and only resident rainbow upstream of Matilija Dam. A total of 21 index sites or reaches were subjectively selected (Appendix 26) with small to medium size gravel that are suitable for steelhead spawning (Shapovalov and Taft 1954; Orcutt et al. 1968). During 2008, the spawning index sites selected were initially distributed broadly within the basin to capture general spawning locations and timing. Since 2008, longer

reaches have been added to incorporate and replace previously surveyed discrete sites to accommodate for spawning gravel redistribution after storm events. Additional sites have been added to capture quality spawning habitat and to be more representative of each surveyed sub-basin. This initial information will be used to establish long-term index sites to capture population trends. The spawning surveys were conducted biweekly from January through June, or until no further spawning was observed, and observations were made at sites to identify and count *O. mykiss* redds; redds were identified by typical characteristics (Orcutt et al. 1968; Chapman 1988). Once a redd was identified, physical measurements similar to those recorded by Zimmerman and Reeves (2000) were collected to characterize the redd. The physical measurements were only recorded during the first three years because it was felt sufficient data was collected to characterize redds. Currently, larger redds (likely anadromous) have all measurements collected. Pit and tailspill lengths were measured from the upstream end to the downstream end of each, respectively. Redd width was measured at the widest point of the tailspill (Appendix 27). Water depth was measured at four locations: in the pit, adjacent to the pit, upstream of the pit, and at the tailspill. The surface median (D_{50}) and maximum substrate size of each redd tailspill was estimated. All adjacent measurements were taken on the thalweg side of each redd. Photos and GPS locations were also recorded for all redds identified. This information will help determine steelhead spawning habitat selection characteristics.

Results

Spawning surveys started in 2008, numbers initially increased from only 3 redds to a high of 165 redds in 2012. Over the last 5 years, as the current drought intensified or was sustained, the available habitat diminished, and there have been corresponding losses to the adult and juvenile *O. mykiss* populations with significantly lower redd counts. In 2018, no redds were observed in the index areas (Appendix 28).

7.3 Ambient Water Quality Monitoring

In order to fully evaluate several aspects of the monitoring and evaluation program, water quality data is collected throughout the Ventura River basin (Appendix 29). Water

temperatures are recorded at 12 locations throughout the Ventura River basin. The locations include the Ventura River estuary and mainstem, Coyote Creek, San Antonio Creek, North Fork Matilija Creek, and Matilija Creek upstream and downstream of Matilija Dam. The loggers record at 30-min intervals. Monthly grab samples are also collected at the same locations with a multiprobe that measures: dissolved oxygen, pH, conductivity, salinity, TDS, and temperature. A monthly water quality profile is also collected in the estuary/lagoon. The profiles are collected at approximately the mid-point of the estuary/lagoon and at least four depths are recorded. A continuous turbidity probe is also installed in the Robles Fish Facility near the Riverwatcher. It records water turbidity at 1-hr intervals when the bypass is operational. Turbidity measurements are also collected at several sites upstream, downstream, and within the Robles Fish Facility to ensure the continuous probe is located in a position that will be representative of the turbidity in the Ventura River. All locations were monitored if sufficient water was present. A weather station has been installed at the Robles Fish Facility to collect various atmospheric data including rainfall, temperature, pressure, wind, humidity, and dew point (Appendix 30).

7.4 Estuary/Lagoon Monitoring

The sandbar is monitored during the fish passage season to determine if it is open. If open, Robles Fish Facility operating criteria must be met per the BO. Outside of the passage season, monitoring has been conducted and expanded to better understand the nature of the Ventura River sandbar and how it may affect fish passage year round, and also potential rearing capacity. The estuary/lagoon has been monitored monthly for water depth as part of the water quality monitoring. In addition, the surface area has been measured every 6 months. Together, these physical measurements can provide some general index of rearing capacity of the Ventura River estuary/lagoon over time. From 2008 through 2011, which were wetter years, the sandbar status and estuary/lagoon depth and size varied with conditions. However, since the beginning of the current drought in 2012 through 2017, conditions have remained somewhat uniform (Appendix 31).

7.5 Surface Flow Monitoring

The Ventura River, like most rivers in southern California, have significant reaches that lose surface flow during most years after storm flows recede. To quantify this natural pattern, surface flows have been observed and documented beginning at the end of 2007. Like the sandbar monitoring, clear patterns have become apparent. During normal precipitation years, there are typically surface flows throughout the length of the Ventura River mainstem during the fish passage season. Even during years of normal precipitation, the Robles Reach goes dry shortly after storms occur. However, beginning with the drought, the Robles Reach has been dry for extensive periods of time, even extending downstream of the San Antonio Creek confluence. This dry pattern was reduced significantly due to the precipitation and runoff during 2017 monitoring period. During 2018, even though the precipitation was about 50% of average, surface flow continued longer in time and farther downstream than would normally be expected (Appendix 32). This may be caused, paradoxically, from the effects of the Thomas Fire. One, a significant amount of sediment, after the January storm, was deposited within the stream channels upstream of Robles that could have provided water storage capacity and extended the low-flow hydrograph. Two, fine sediment from the January storm deposited fine sediment downstream of Riverwatcher that filled interstitial spaces between channel surface substrate and reduced infiltration and extending the distance of surface flows. Three, a decrease in evapotranspiration post fire also increased basin flows.

7.6 Photographic Index Sites

Photographic index sites were established throughout the Ventura River basin in 2007 to monitor general changes of the stream channel morphology, water conditions, and riparian zones. There are a total of 14 sites where an upstream and downstream photo are taken (Appendix 33). The sites were re-visited twice during the reporting period, in September 2017 and March 2018. As a representation of the general patterns within the mainstem of the Ventura River, Appendix 34 shows the general trend that has been observed of increasing riparian and within channel vegetation over time since 2011.

7.7 Underwater Video Monitoring

As time allowed, a pilot study of an underwater video monitoring system was continued to determine if remote monitoring for adults or smolts is feasible within the Ventura River or tributaries. The monitoring system was placed at selected locations when water conditions were suitable to record fish rearing, holding, or migrating. The system consisted of an underwater video camera attached to a DVR that can record for 6-8 hours at a time. The system was powered by a 12 volt DC battery so the system could be placed anywhere within the basin. The video was reviewed to determine presence or absence and relative numbers of steelhead. If this pilot study is successful, it may be expanded and developed into a more quantitative monitoring tool. This system also was used at the fish ladder entrance during post-storm observations. Underwater video monitoring was not conducted during the 2018 fish passage season.

7.8 Stranding Surveys

Stranding surveys were conducted during the reporting period as part of other monitoring and evaluations (i.e., impediment, snorkel, and spawning surveys) and no stranded *O. mykiss* were observed.

8.0 LITERATURE CITED AND BIBLIOGRAPHY

- Adams, N. S., D. W. Rondorf, S. D. Evans, and J. E. Kelly. 1998. Effects of surgically and gastrically implanted radio transmitters on growth and feeding behavior of juvenile Chinook salmon. *Transaction of the American Fisheries Society*, 127:128-136.
- Anderson, R. O., and R. M. Neumann. 1996. Length, weight, and associated structural indices. Pages 477-482 in B. R. Murphy and D. W. Willis, editors. *Fisheries techniques*, 2nd edition. American Fisheries Society, Bethesda, Maryland.
- Ando, D., T. Kitamura, and S. Mizuno. 2005. Quantitative analysis of body silvering during smoltification in masu salmon using chromameter. *North American Journal of Aquaculture*, 67:160-166.
- Banks, J. W. 1969. A review of the literature on the upstream migration of adult salmonids. *Journal of Fish Biology*, 1:85-136.
- Beeman, J. W., and A. G. Maule. 2001. Residence time and diel passage distribution of radio-tagged juvenile spring Chinook salmon and steelhead in a gatewell and fish collection channel of a Columbia River dam. *North American Journal of Fisheries Management*, 21:455-463.
- Beeman, J. W., D. W. Rondorf, M. E. Tilson, and D. A. Venditti. 1995. A nonlethal measure of smolt status of juvenile steelhead based on body morphology. *Transactions of the American Fisheries Society* 124:764-769.
- Behnke, R. J. 1992. Native trout of western North America. *American Fisheries Society Monograph* 6.
- Bond, M. H., A. A. Hayes, G. V. Hanson, and R. B. MacFarlane. 2008. Marine survival of steelhead (*Oncorhynchus mykiss*) enhanced by a seasonally closed estuary. *Canadian Journal of Fisheries and Aquatic Sciences*, 65: 2242-2252.
- Bratovich, P. M., and D. W. Kelley. 1988. Investigation of salmon and steelhead in Lagunitas Creek, Marin County, California. Volume 1. Migration, spawning, embryo incubation and emergence, juvenile rearing, emigration. Marin Municipal Water District. Corte Madera, California.
- Brown, R. S., S. J. Cooke, W. G. Anderson, and R. S. McKinley. 1999. Evidence to challenge the "2% rule" for biotelemetry. *North American Journal of Fisheries Management*, 19:867-871.

- Busby, P. B., T. C. Wainwright, G. J. Bryant, L. J. Lierheimer, R. S. Waples, F. W. Waknitz, and Lagomarsino. 1996. Status review of west coast steelhead from Washington, Idaho, Oregon, and California. National Marine Fisheries Service. NOAA technical memorandum NMFS-NWFSC-27, August 1996.
- Cannata, S. T. 1998. Observations of steelhead trout (*Oncorhynchus mykiss*), coho salmon (*O. kisutch*) and water quality of the Navarro River estuary/lagoon, May 1996 to December 1997. Draft report, Humboldt State University Foundation. Humboldt, CA.
- Chapman, D. W. 1988. Critical review of variables used to define effects of fines in redds of large salmonids. Transactions of the American Fisheries Society 117(1):1-21.
- Chrisp, E. Y., and T. C. Bjornn. 1978. parr-smolt transformations and seaward migration of wild and hatchery steelhead trout in Idaho. Idaho Cooperative Fishery Research Unit, University of Idaho, Moscow, Idaho. Final project report F-49-R.
- Clay, H. C. 1995. Design of fishways and other fish facilities, 2nd edition. CRC Press, Inc., Boca Raton, FL.
- Cooke, R. U., A. Warren, and A. S. Goudie. 1992. Desert geomorphology. UCL Press, London.
- CMWD. 2005. 2005 progress report for the Robles Diversion Fish Passage Facility. Casitas Municipal Water District, Oak View, CA.
- CMWD. 2006. 2006 progress report for the Robles Diversion Fish Passage Facility. Casitas Municipal Water District, Oak View, CA.
- CMWD. 2007. 2007 progress report for the Robles Diversion Fish Passage Facility. Casitas Municipal Water District, Oak View, CA.
- CMWD. 2008. 2008 progress report for the Robles Diversion Fish Passage Facility. Casitas Municipal Water District, Oak View, CA.
- CMWD. 2009. 2009 progress report for the Robles Diversion Fish Passage Facility. Casitas Municipal Water District, Oak View, CA.
- CMWD. 2010. 2010 progress report for the Robles Diversion Fish Passage Facility. Casitas Municipal Water District, Oak View, CA.
- CMWD. 2011. 2011 progress report for the Robles Diversion Fish Passage Facility. Casitas Municipal Water District, Oak View, CA.


- CMWD, Wood Rogers, and ENTRIX Inc. 2002. Preliminary draft technical memorandum of operation constraint assessment of the Robles Fish Passage Facility. Prepared for US Bureau of Reclamation.
- Dauble, D. D., T. L. Page, and W. Hanf. 1989. Spatial distribution of juvenile salmonids in the Hanford Reach, Columbia River. *Fishery Bulletin*, 87:775-790.
- Dettman, D. H., and D. W. Kelley. 1986. Assessment of the Carmel River steelhead resource, Volume 1. biological investigations. Monterey Peninsula Water Management District, Monterey, CA.
- ENTRIX. 1999. Evaluations of natural passage barriers on the Ventura River downstream of Robles Diversion. ENTRIX, Walnut Creek, CA.
- ENTRIX. 2000. Results of fish passage monitoring at the Vern Freeman diversion facility Santa Clara River, 1994-1998. ENTRIX, Walnut Creek, CA.
- Flosi, G., S. Downie, J. Hopelain, M. Bird, R. Coey, and B. Collins. 2002. California salmonid stream habitat restoration manual, Volume I, 3rd edition. California Department of Fish and Game. Inland Fisheries Division, Sacramento, CA.
- Hagar, J. 1996. Salinas River steelhead status and migration flow requirements. Monterey County Water Resources Agency. Salinas, California.
- Haner, P. V., J. C. Faler, R. M. Schrock, D. W. Rondorf, and A. G. Maule. 1995. Skin reflectance as a nonlethal measure of smoltification for juvenile salmonids. *North American Journal of Fisheries Management*, 15:814-822.
- Hockersmith, E. E., W. D. Muir, S. G. Smith, B. P. Sandford, N. S. Adams, J. M. Plumb, R. W. Perry, and D. W. Rondorf. 2000. Comparative performance of sham radio-tagged and PIT-tagged juvenile salmon. US Army Corps of Engineers, Walla Walla District.
- Harrison, L. R., E. A. Keller, E. Kelley, and L. A. K. Mertes. 2006. Minimum flow requirements for southern steelhead passage on the lower Santa Clara River, CA. University of California, Santa Barbara.
- Hasler, A. D., and A. T. Scholz. 1983. Olfactory imprinting and homing in salmon. Springer-Verlag, New York.
- Jepsen, N., L. E. Davis, C. B. Schreck, and B. Siddens. 2001. The physiological response of Chinook salmon smolts to two methods of radio-tagging. *Transactions of the American Fisheries Society* 130:495-500.
- Leopold, L. B., M. G. Wolman, and J. P. Miller. Fluvial processes in geomorphology. W. H. Freeman and Company, San Francisco.

- Lewis, S. D. 2001. Movements of hatchery steelhead smolts in Lake Billy Chinook and Squaw Creek during 2000. Portland General Electric. Portland, Oregon.
- Lewis, S. D. 2002. Movements of hatchery steelhead smolts in Lake Billy Chinook and Squaw Creek during 2001. Portland General Electric. Portland, Oregon.
- Lewis, S. D. 2003. Movements of hatchery steelhead smolts in Lake Billy Chinook and Squaw Creek during 2002. Portland General Electric. Portland, Oregon.
- Lewis, S. D., M. W. Gibson, and J. L. Switzer. 2010. Ventura River basin *Oncorhynchus mykiss irideus* monitoring, evaluation, and research: 2010 annual program report. Casitas Municipal Water District, Oak View, California.
- Lewis, S. D., M. W. Gibson, J. L. Switzer, and A. L. Bonsignori. 2016. DRAFT—Verification testing of the Robles Fish Facility Vaki Riverwatcher. Casitas Municipal Water District, Oak View, California.
- Lewis, S. D., M. W. Gibson, and J. L. Switzer. 2015. 2016 monitoring and evaluation study plan for the Robles Fish Passage Facility and related studies. Casitas Municipal Water District, Oak View, California.
- Matthews, K. R., and N. H. Berg. 1997. Rainbow trout responses to water temperature and dissolved oxygen stress in two southern California stream pools. *Journal of Fish Biology*, 50:50-67.
- Matthews, K. R., N. H. Berg, D. L. Azuma, and T. R. Lambert. 1994. Cool water formation and trout habitat use in a deep pool in the Sierra Nevada, California. *Transactions of the American Fisheries Society*, 123:549-564.
- Moore, K., K. Jones, and J. Dambacher. 2002. Methods for stream habitat surveys, Version 12.1. Oregon Department of Fish and Wildlife, Aquatic Inventories Project, Natural Production Program, Corvallis, OR.
- Mosley, M. P. 1982. Critical depths for passage in braided river, Canterbury, New Zealand. *New Zealand Journal of Marine and Freshwater Research*, Vol. 16:351-357.
- National Marine Fisheries Service. 1997. Endangered and Threatened Species: Listing of Several Evolutionary Significant Units (ESUs) of West Coast Steelhead. Federal Register, 50 CFR Parts 222 and 227 [Docket No. 960730210-7193-02; I.D. 050294D] RIN 0648-XX65. Vol. 62, page 43937.
- National Marine Fisheries Service. 2003a. Biological opinion for the Robles diversion fish passage facility, Ventura River, CA. Protected Resource Division, Southwest Region, March 31, 2003.

- National Marine Fisheries Service. 2003b. Endangered and Threatened Species: Range Extension for Endangered Steelhead in Southern California. Federal Register, 50 CFR Part 224 [Docket No. 001025296-2079-02; I.D. 072600A] RIN 0648-AO05. Vol. 67 page 21586.
- National Marine Fisheries Service. 2005. Endangered and Threatened Species: Request for Comment on Alternative Approach to Delineating 10 Evolutionarily Significant Units of West Coast *Oncorhynchus mykiss*. 50 CFR Parts 223 and 224 [Docket No. 040525161–5274–05; I.D. No. 052104F] RIN No. 0648–AR93. Vol. 70 page 67130.
- National Marine Fisheries Service. 2009. Letter addressed to Scott Lewis (Casitas Municipal Water District) addressing the downstream fish passage evaluation. Letter dated 28 April 2009, SWR/2002/1871:SCG.
- Orcutt, D. R., B. R. Pulliam, and A. Arp. 1968. Characteristics of steelhead trout redds in Idaho streams. Bureau of Commercial Fisheries, Boise, Idaho.
- Odeh, M. 2000. Advances in fish passage technology: engineering design and biological evaluation. American Fisheries Society, Bethesda, Maryland.
- Quinn, T. H. 2005. The behavior and ecology of Pacific salmon and trout. American Fisheries Society, Bethesda, Maryland.
- Scott, W. B. and E. J. Crossman. 1973. Freshwater fishes of Canada. Fisheries Research Board of Canada, Ottawa, Bulletin 184.
- Shapovalov, L. and A. C. Taft. 1954. The life histories of the steelhead rainbow trout (*Salmo gairdneri gairdneri*) and silver salmon (*Oncorhynchus kisutch*), with special reference to Waddell Creek, California, and recommendations regarding their management. State of California Department of Fish and Game, fish bulletin No. 98.
- Spina, A. P., M. A. Allen, and M. Clarke. 2005. Downstream migration, rearing abundance, and pool habitat associations of juvenile steelhead in the lower main stem of a south-central California stream. North American Journal of Fisheries Management, 25:919-930.
- Stoecker, M. 2010. North Fork Matilija Creek adult steelhead below Ojai Quarry barriers. Letter sent on 30 March 2010 about adult steelhead observations, 5 p.
- Strauss, R. E., and C. E. Bond. 1990. Taxonomic methods: In Schreck C. B. and P. B. Moyle, editors. Methods for fish biology. AFS, Bethesda, Maryland.

- Summerfelt, R. C., and L. S. Smith. 1990. Anesthesia, surgery, and related techniques. Pages 213-272 in C. B. Schreck and P. B. Moyle, editors. *Methods for Fish Biology*. American Fisheries Society, Bethesda, Maryland.
- SYRTAC (Santa Ynez River Technical Advisory Committee). 1999. Adult steelhead passage flow analysis for the Santa Ynez River. Santa Ynez River Consensus Committee, Santa Barbara, CA.
- SYRTAC (Santa Ynez River Technical Advisory Committee). 2000. Lower Santa Ynez River fish management plan. Santa Ynez River Consensus Committee, Santa Barbara, CA.
- Tan, S. S., and T. A. Jones. 2006. Geologic map of the Matilija 7.5' quadrangle Ventura County, California: a digital database. Version 1.0, Los Angeles, CA.
- Thompson, K. 1972. Determining stream flows for fish life. Pacific Northwest River Basins Commission, instream flow requirements workshop. Portland, Oregon. Proceedings: 31-50.
- U.S. Bureau of Reclamation. 2003. Revised biological assessment for diversion operations and fish passage facilities at the Robles Diversion, Ventura River, CA. South-Central California Area Office, February 21, 2003.
- Vaki. 2003. User manual for Riverwatcher. Vaki Aquaculture Systems Ltd., Iceland.
- Wagner, H. H., R. L. Wallace, and H. J. Campbell. 1963. The seaward migration and return of hatchery-reared steelhead trout, *Salmo gairdneri* Richardson, in the Alsea River, Oregon. *Transactions of the American Fisheries Society*, 92(3):202-210.
- Zimmerman, C. E., and G. H. Reeves. 2000. Population structure of sympatric anadromous and nonanadromous *Oncorhynchus mykiss*: evidence from spawning survey and otolith microchemistry. *Canadian Journal of Fisheries and Aquatic Sciences*, 57:2152-2162.

9.0 APPENDICES

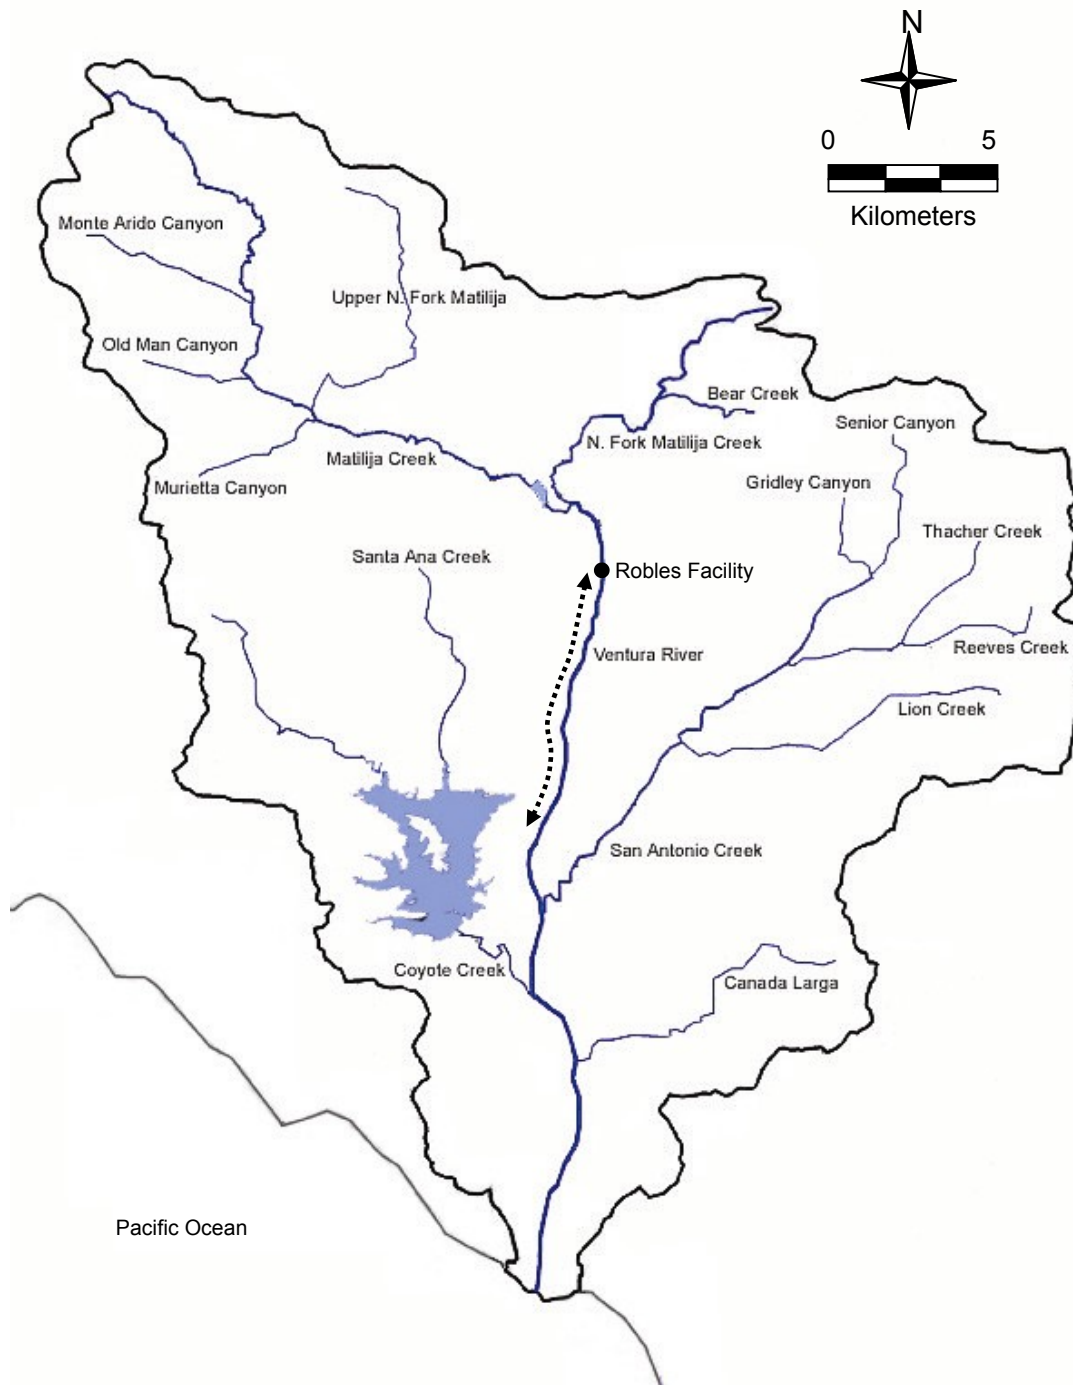

Appendix 1. Basin map of the Ventura River. The Robles Fish Passage Facility is identified by the black dot and the Robles Reach is identified by the dashed line downstream of the Robles Facility.

Appendix 2. Summary data of current impediment sites for upstream fish migration impediment evaluations.

Site No.	Latitude (N)	Longitude (W)	km	Habitat Type ^a	Site Description	Length (m)	Slope (%)	Percent Substrate ^b						Active Channel Width (m)
								SO	SD	GR	CB	BD	BR	
10-2	34.365265°	119.311082°	11	RI	Near Casitas Springs at bottom of levy	38.2	1.0	0	0	10	70	20	0	44.5
3-2	34.373789°	119.308417°	12	RB	Near Casitas Springs at top of levy	22.0	3.7	10	5	10	65	10	0	27.0
4	34.384743°	119.310030°	14	RI	0.5 km upstream of San Antonio Cr. confluence	23.8	5.0	0	0	0	15	85	0	27.9
5-2	34.396095°	119.309537°	15	RI	0.4 km downstream of Santa Ana Blvd. bridge	8.4	7.0	0	5	5	45	45	0	50.6
6-5	34.411318°	119.301491°	17	CB	1.4 km upstream of Santa Ana Blvd. bridge	26.1	5.0	0	0	0	65	35	0	33.8
9	34.426708°	119.301831°	19	RI	0.2 km upstream of Hwy 150 bridge	67.9	1.5	0	0	0	30	70	0	32.4
7	34.438184°	119.299528°	20	RB	1.1 km upstream of Hwy 150 bridge	31.6	2.0	5	0	10	40	45	0	65.9


^aThe habitat types are: RB = rapid with protruding boulders, RI = riffle, and CB = cascade over boulders.

^bThe substrate types are: SO = silt and organics, SD = sand, GR = gravel, CB = cobble, BD = boulders, and BR = bedrock.


Appendix 3. Completed transects at impediment sites for ramp-down target discharges from the Robles Fish Facility through 2018.

Robles Discharge (cfs)	Impediment Sites								
	3-2	4	5-2	6-2 6-3	6-4 6-5	7	9	10	10-2
171	x		x	x, x			x	x	
100		x	x			x		x	
82	x, x	x	x		x	x, x	x, x	x	x
74		x	x, x	x, x	x	x	x		
68	x				x	x	x		x
62	x	x, x, x, x	x	x		x	x	x	x
56	x		x	x	x	x	x	dry	x
50	x	x	x	x, x	x	x, x	x	x, x	x
40	x	x, x, x	x, x	x	x	x, x, x	x, x, x	x	x
30	x	x, x	x	x	x, x	x, x, x	x, x	x	x
20	x	x	x		x	x	x		x


Completed transects rounded to nearest Robles discharge (e.g., the four transects measured at Site 4 ranged from 61-63 cfs) based on mean 2.6 rkm/h lag time and averaging hourly discharge of released water from Robles. Colors correspond to year of survey: x = 2010, x = 2011, x = 2014, x = 2017, x = 2018.

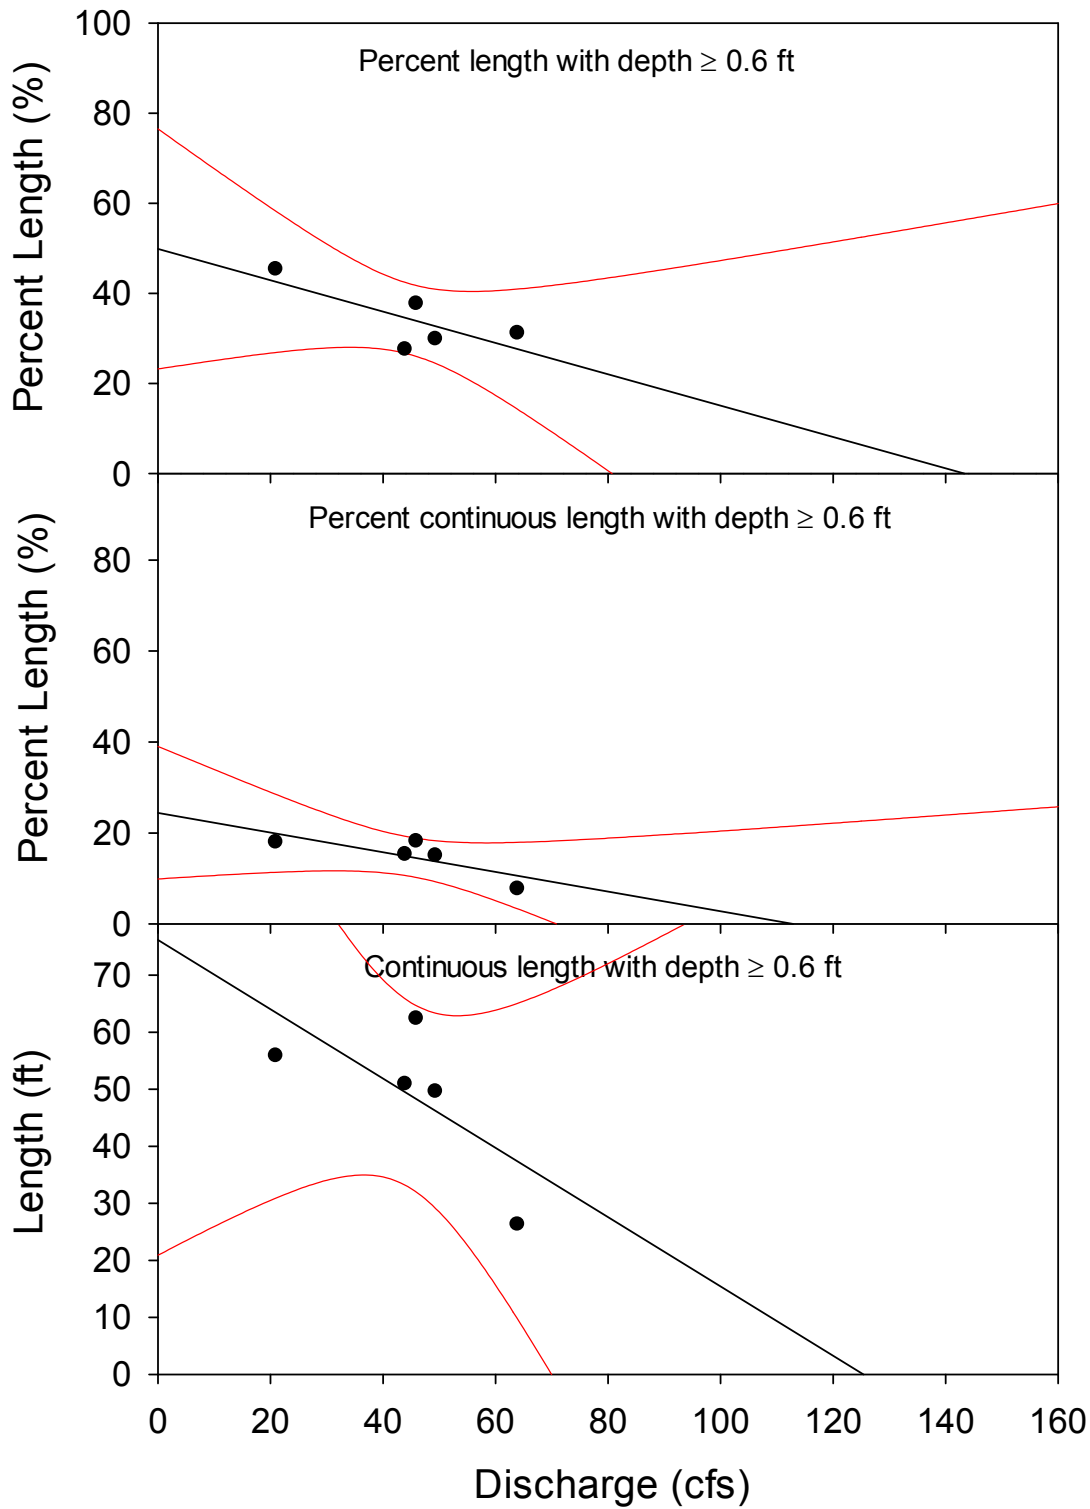


Appendix 4. Linear regression (and 95% CI) between Robles discharge and water depth at Site 2 near Ojai Valley Sanitation District treatment plant.

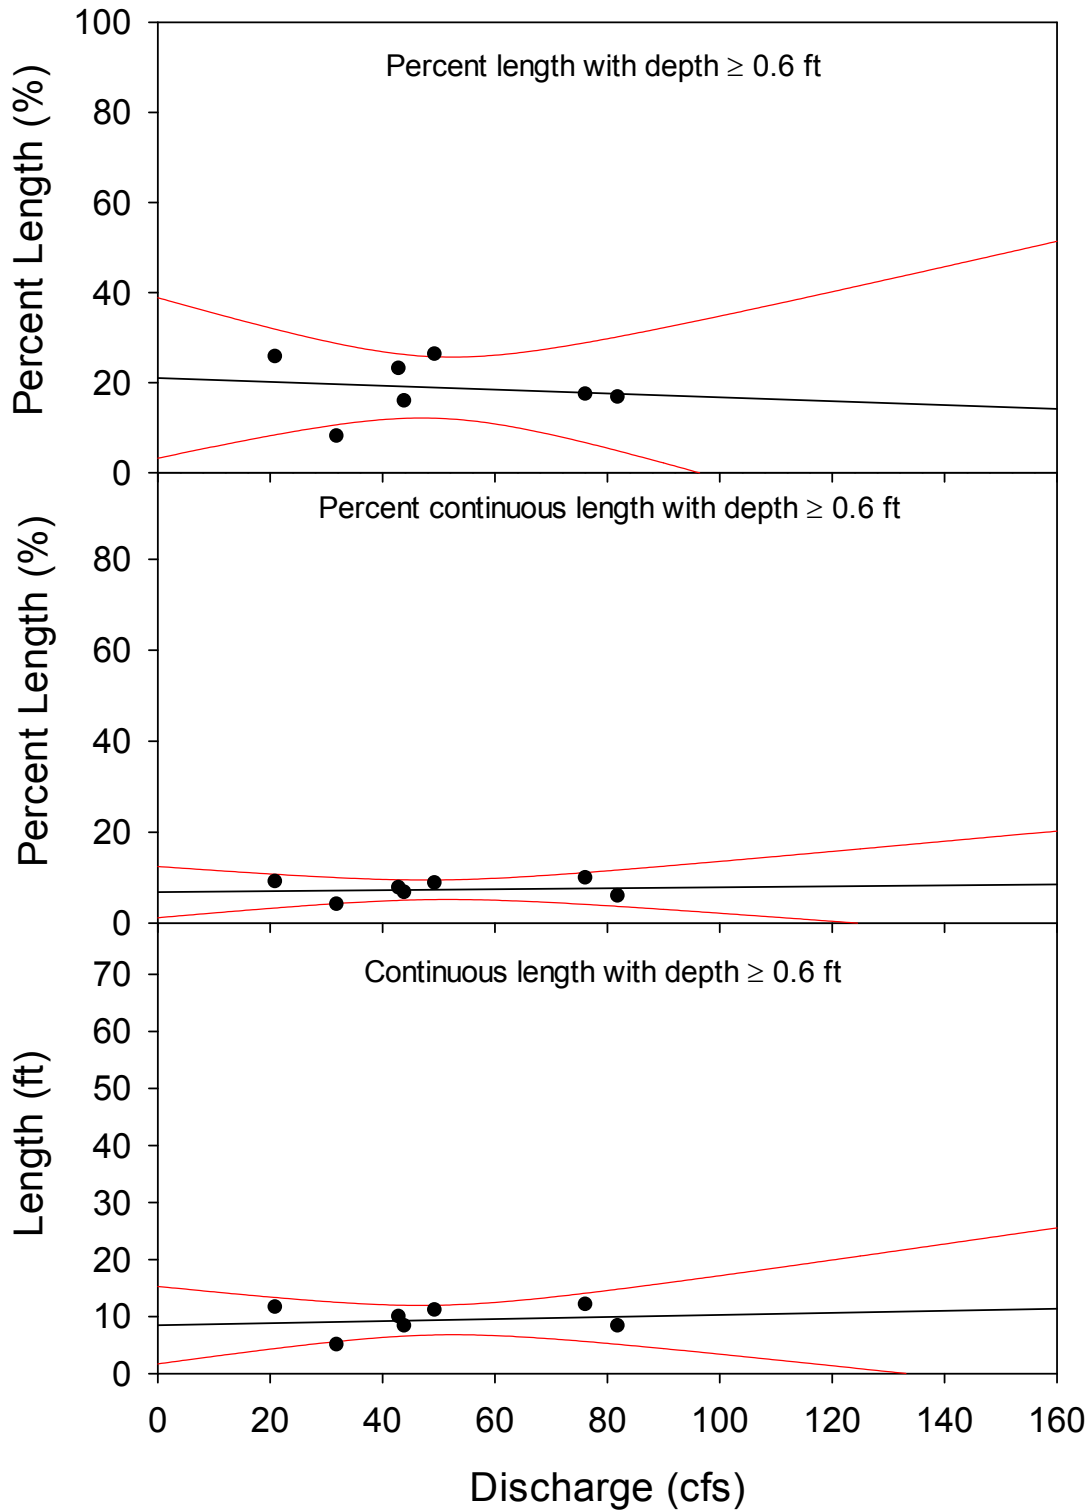


Appendix 5. Linear regression (and 95% CI) between Robles discharge and water depth at Site 3-1 near Casitas Springs.

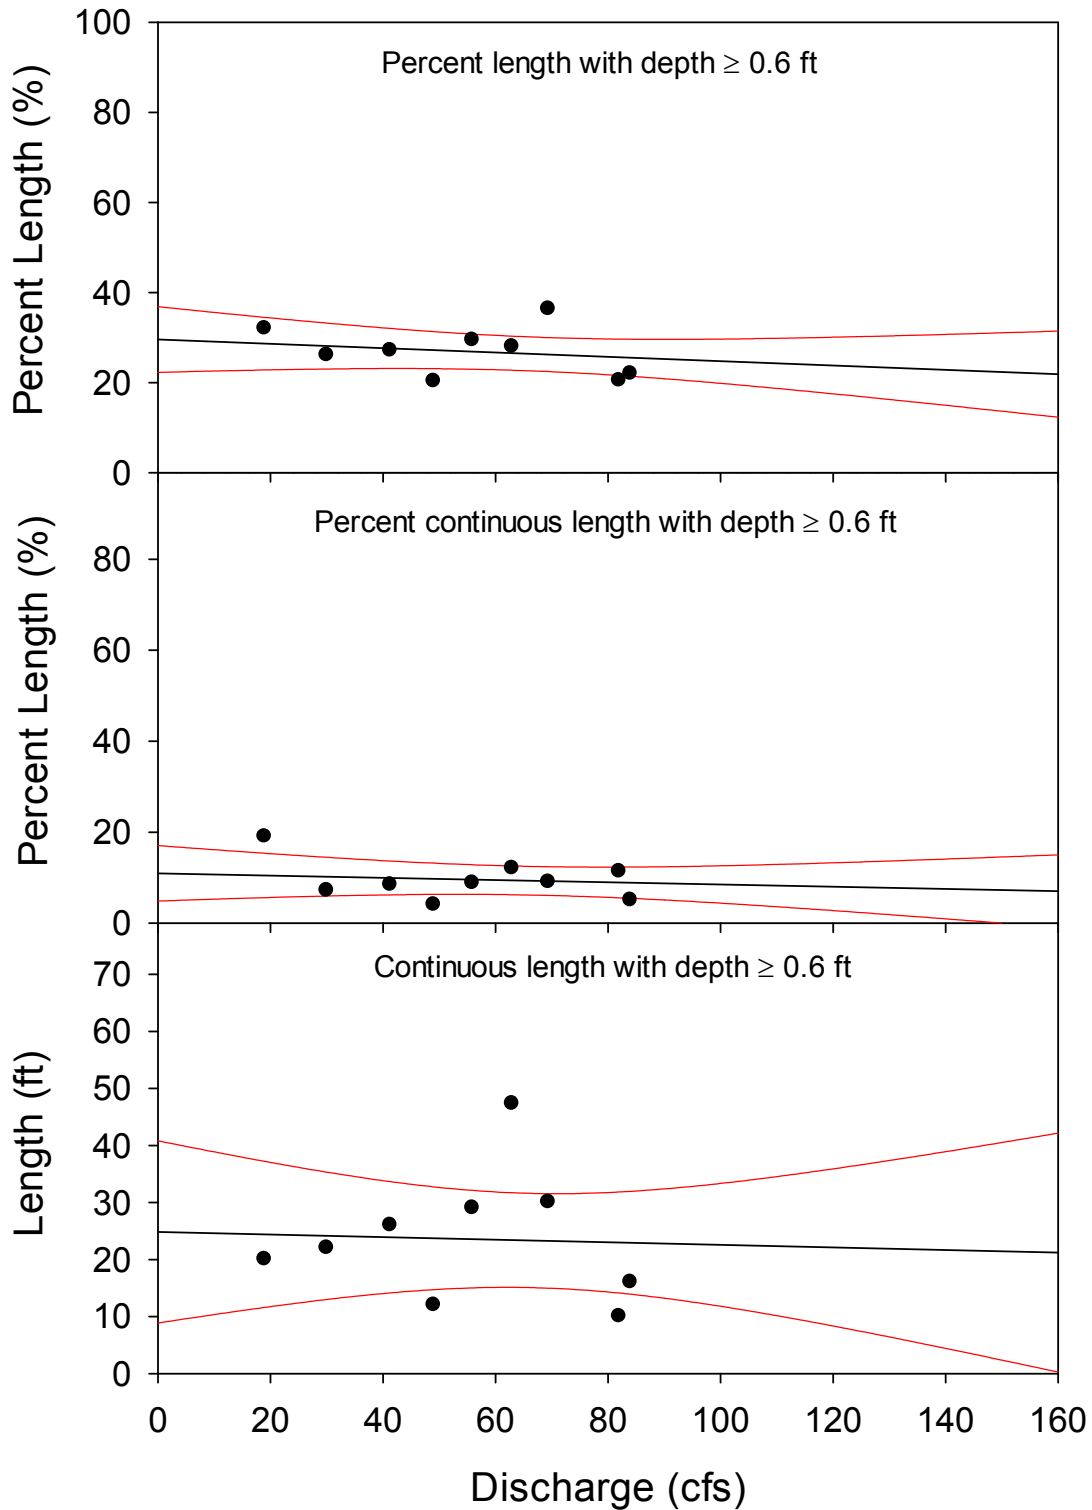


Appendix 6. Linear regression (and 95% CI) between Robles discharge and water depth at Site 3-2 near Casitas Springs.

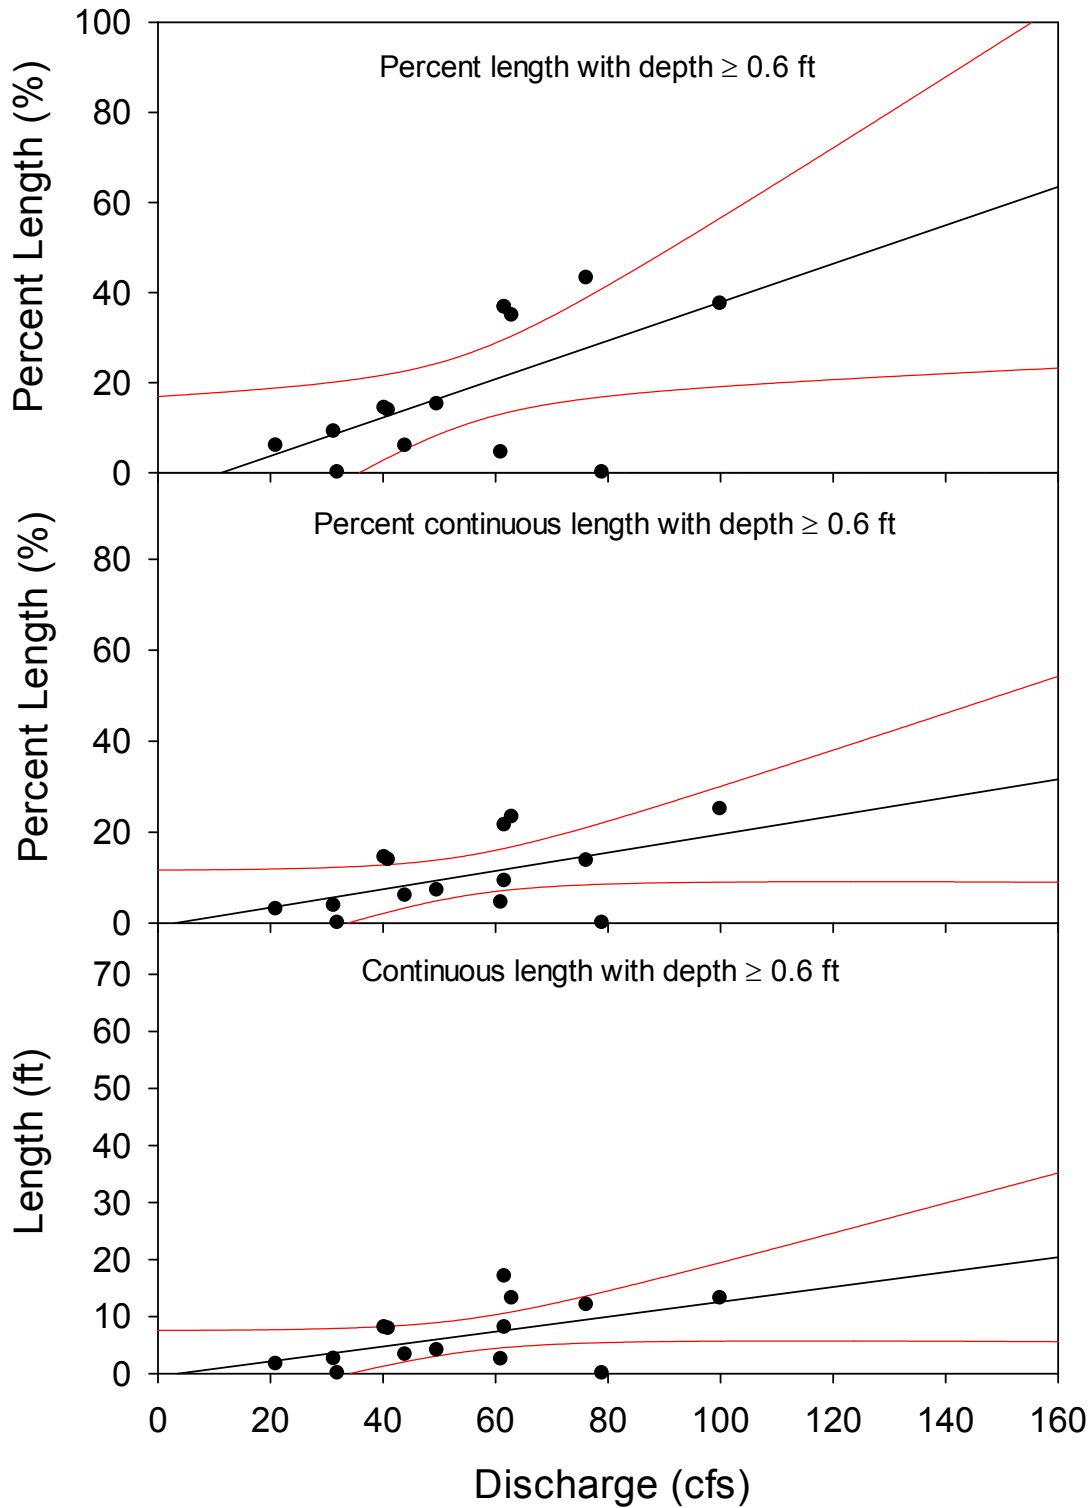


Appendix 7. Linear regression (and 95% CI) between Robles discharge and water depth at Site 4 upstream of San Antonio Creek confluence.

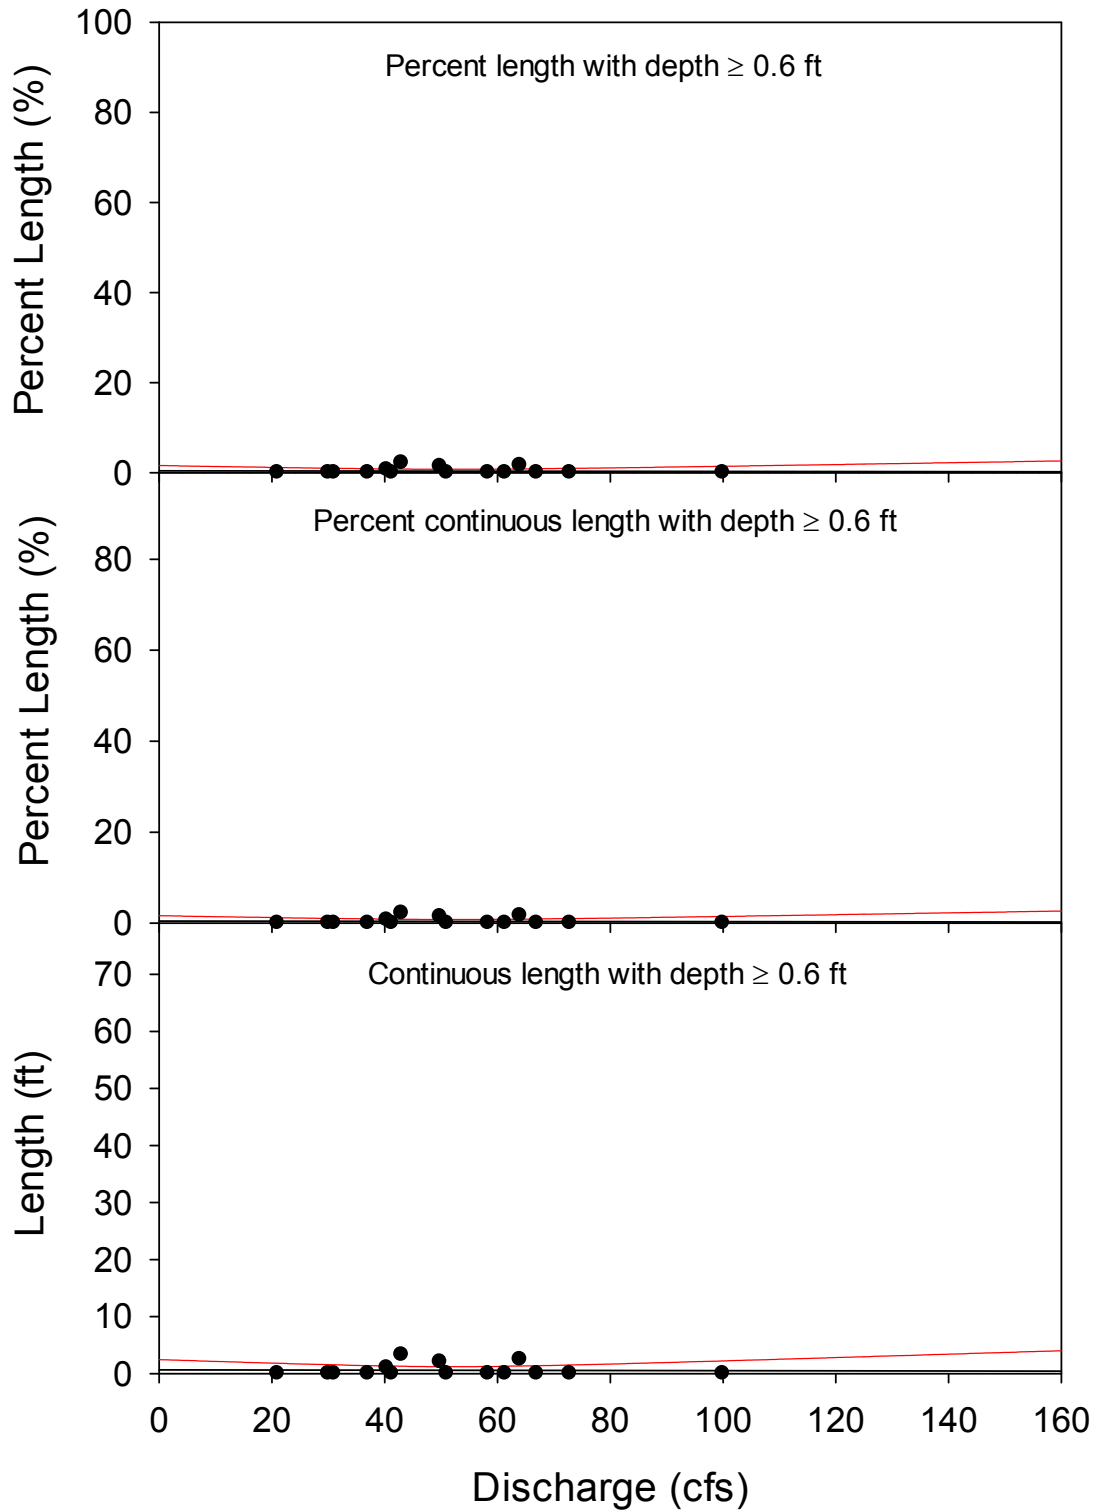


Appendix 8. Linear regression (and 95% CI) between Robles discharge and water depth at Site 5-1 downstream of Santa Ana Bridge.

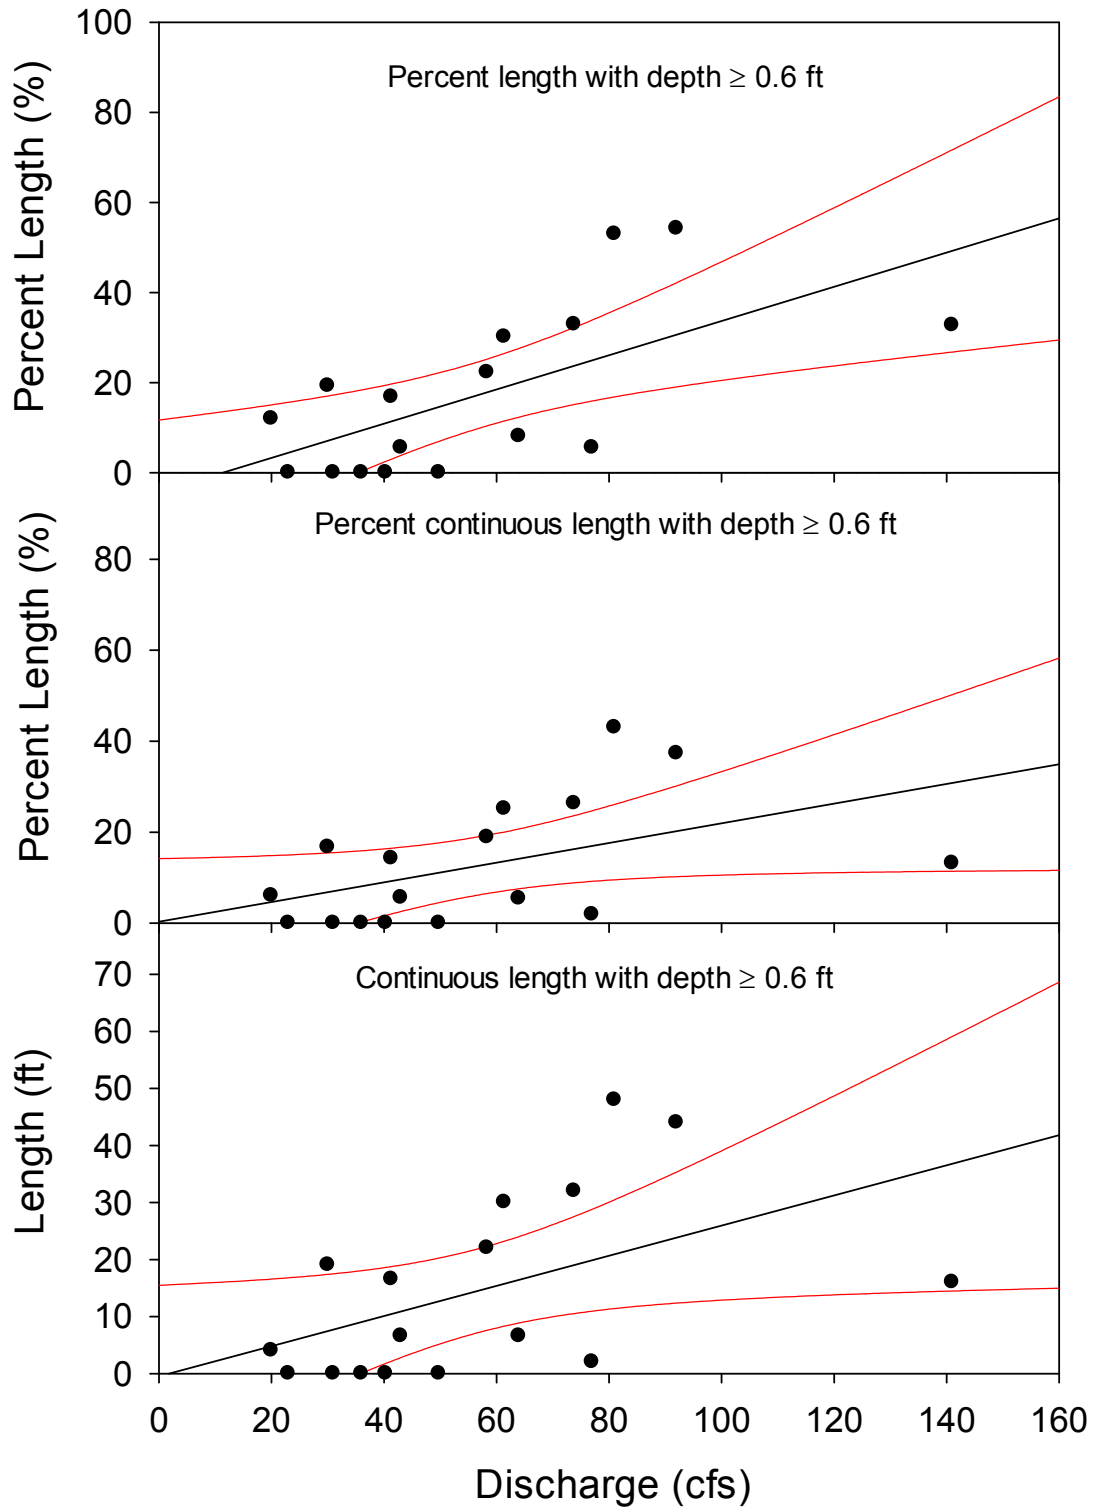


Appendix 9. Linear regression (and 95% CI) between Robles discharge and water depth at Site 5-2 downstream of Santa Ana Bridge.

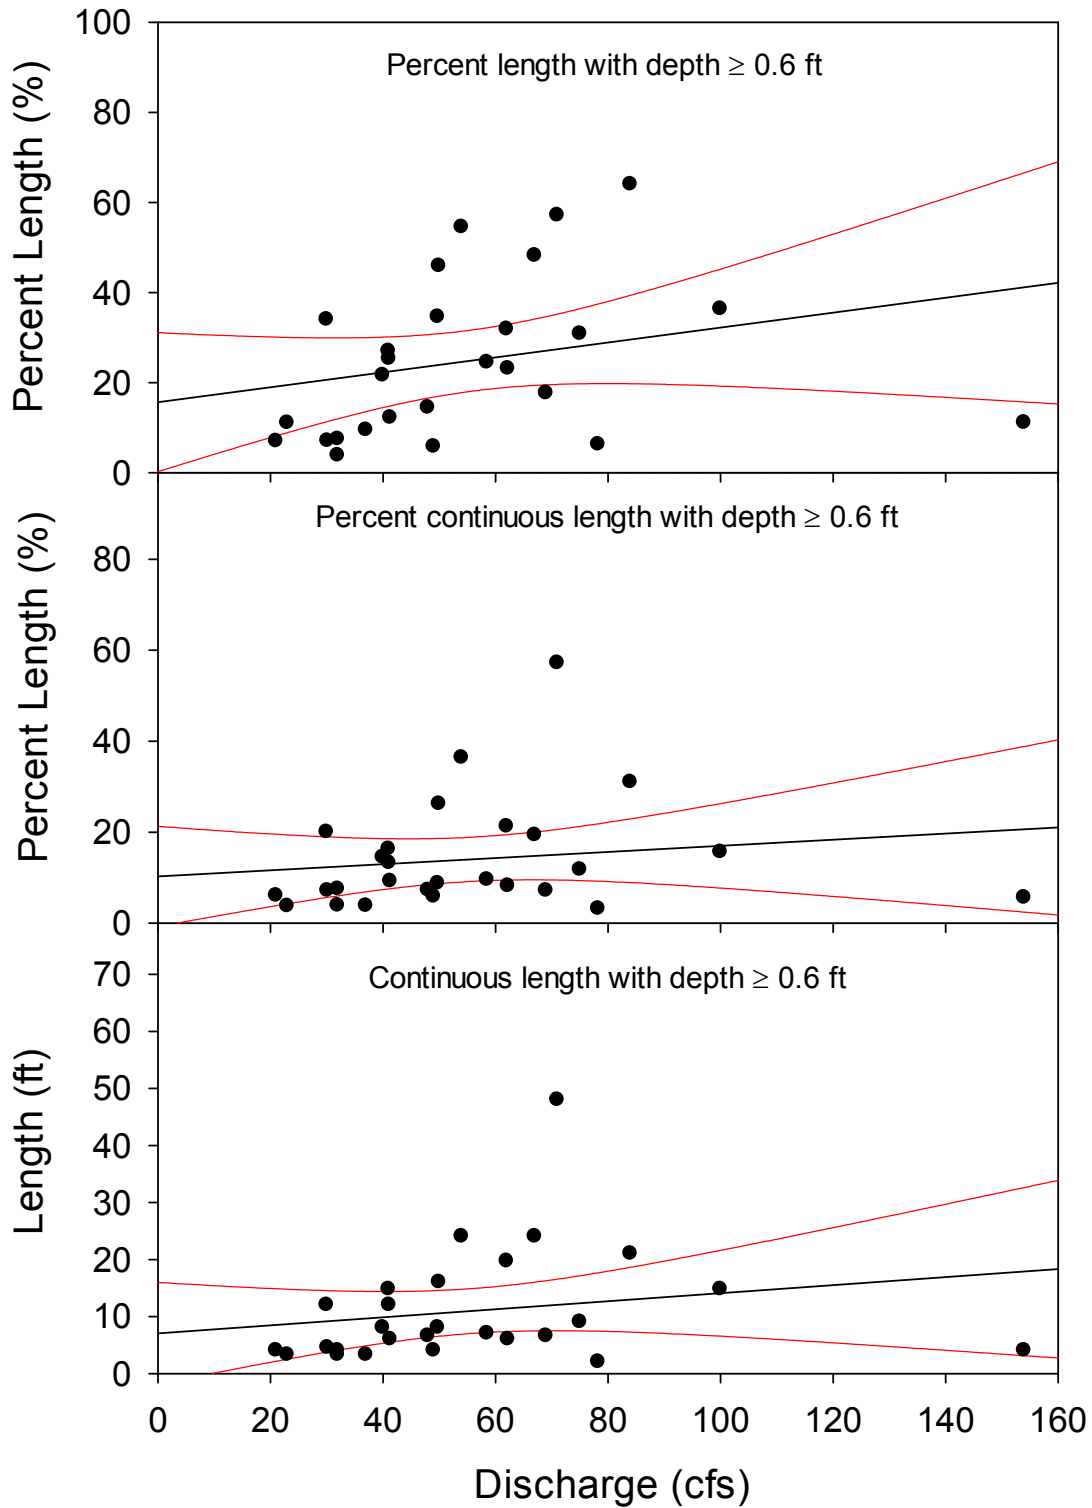


Appendix 10. Linear regression (and 95% CI) between Robles discharge and water depth at Site 6 upstream of Santa Ana bridge.

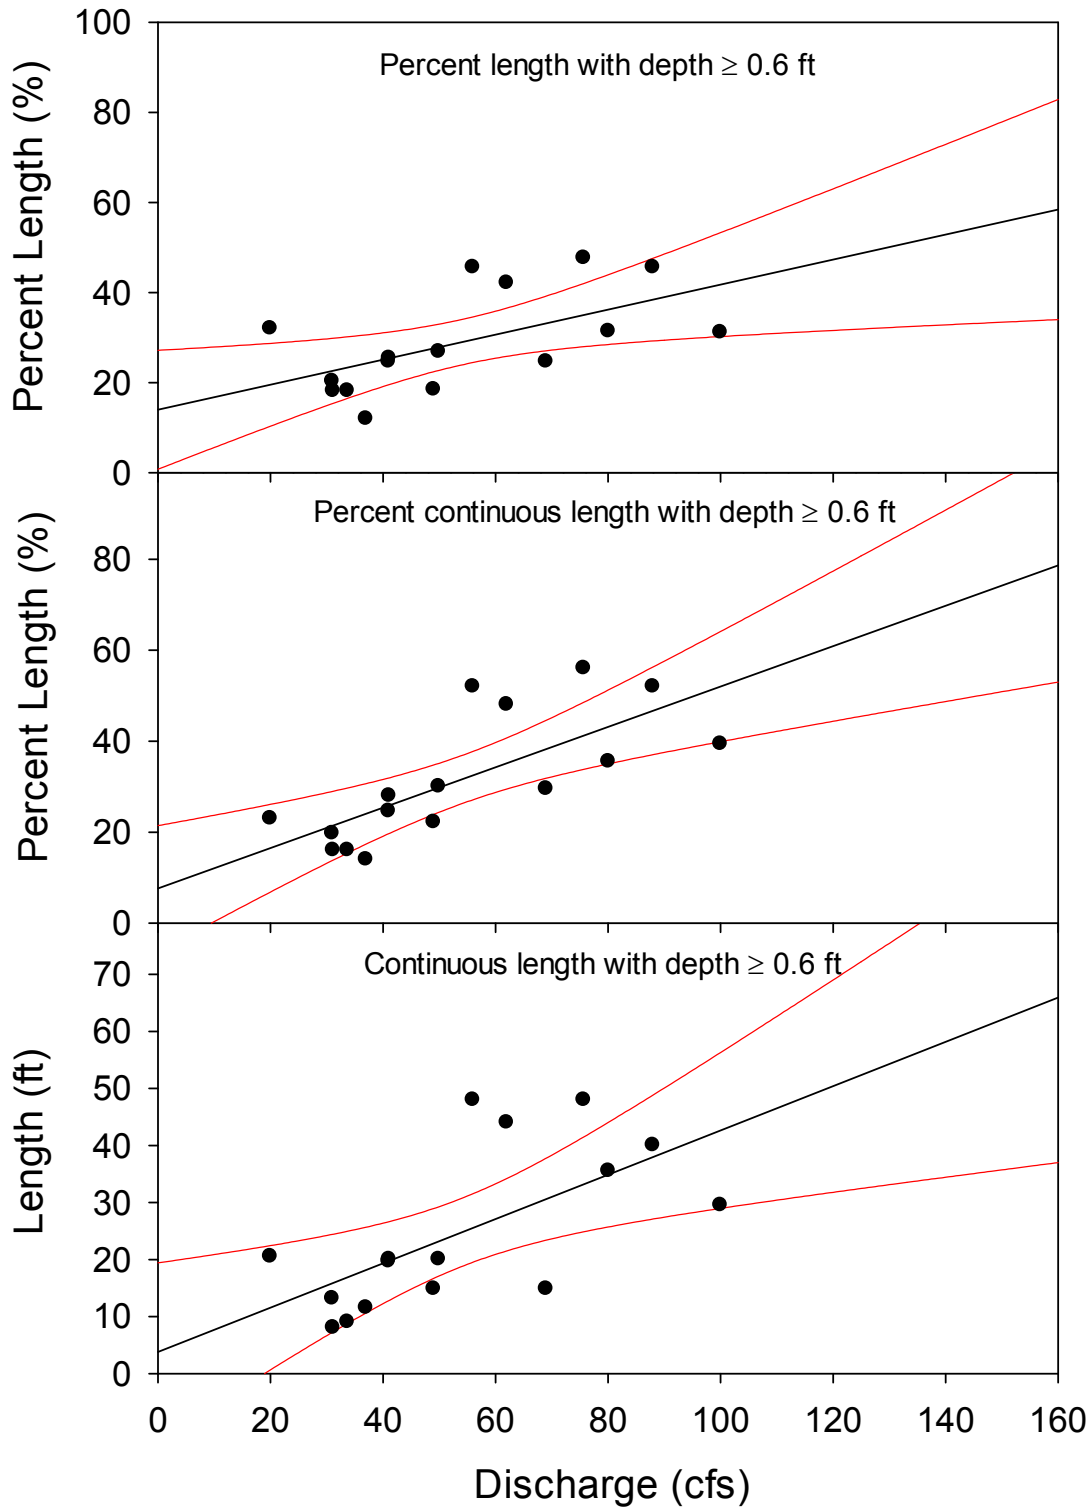


Appendix 11. Linear regression (and 95% CI) between Robles discharge and water depth at Site 7 upstream of Hwy 150 bridge.

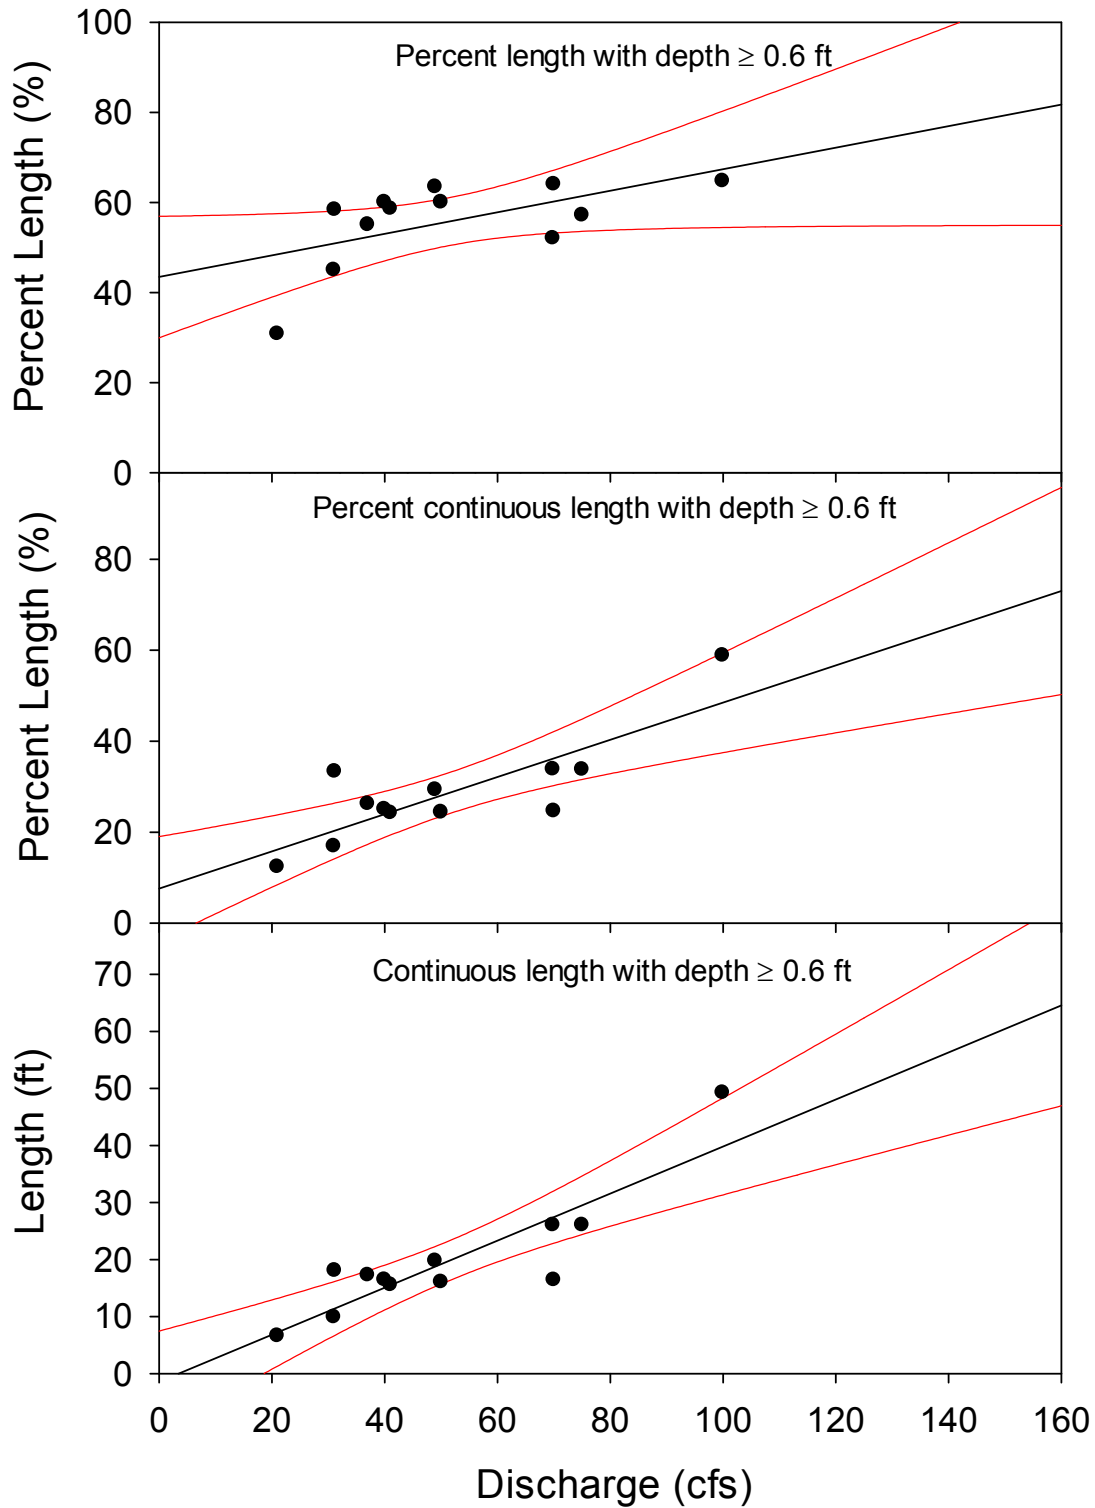

Appendix 12. Linear regression (and 95% CI) between Robles discharge and water depth at Site 8 downstream of Robles Fish Facility.

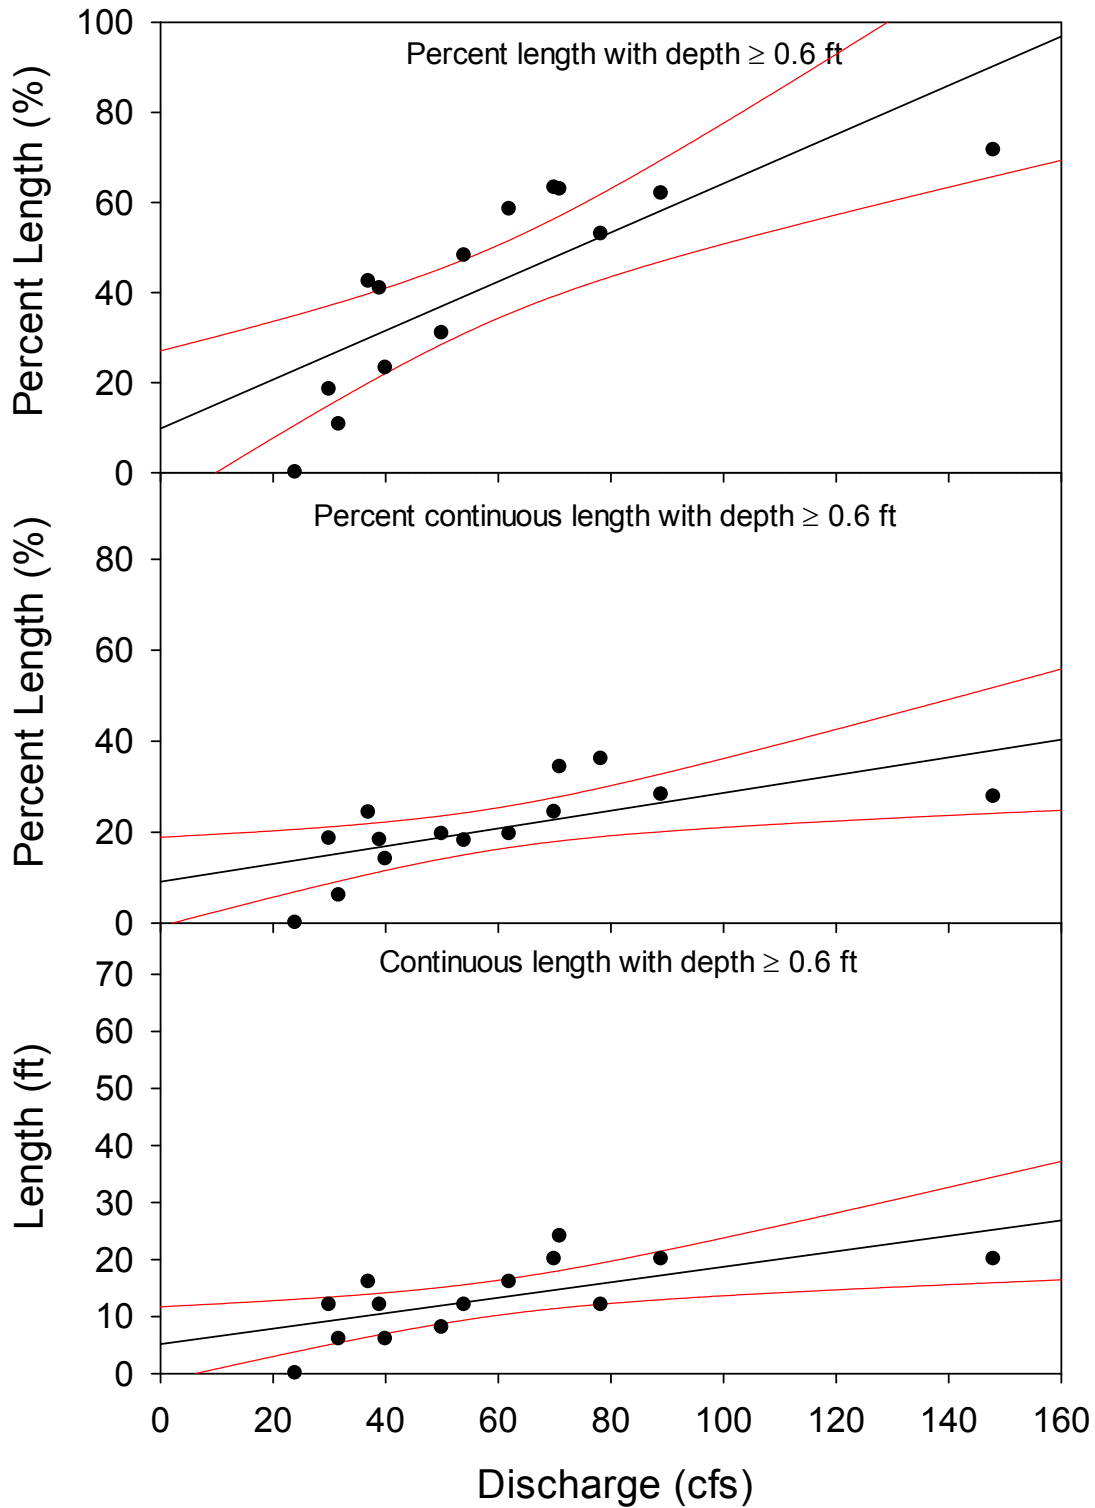

Appendix 13. Linear regression (and 95% CI) between Robles discharge and water depth at Site 9 upstream of Hwy 150 bridge.

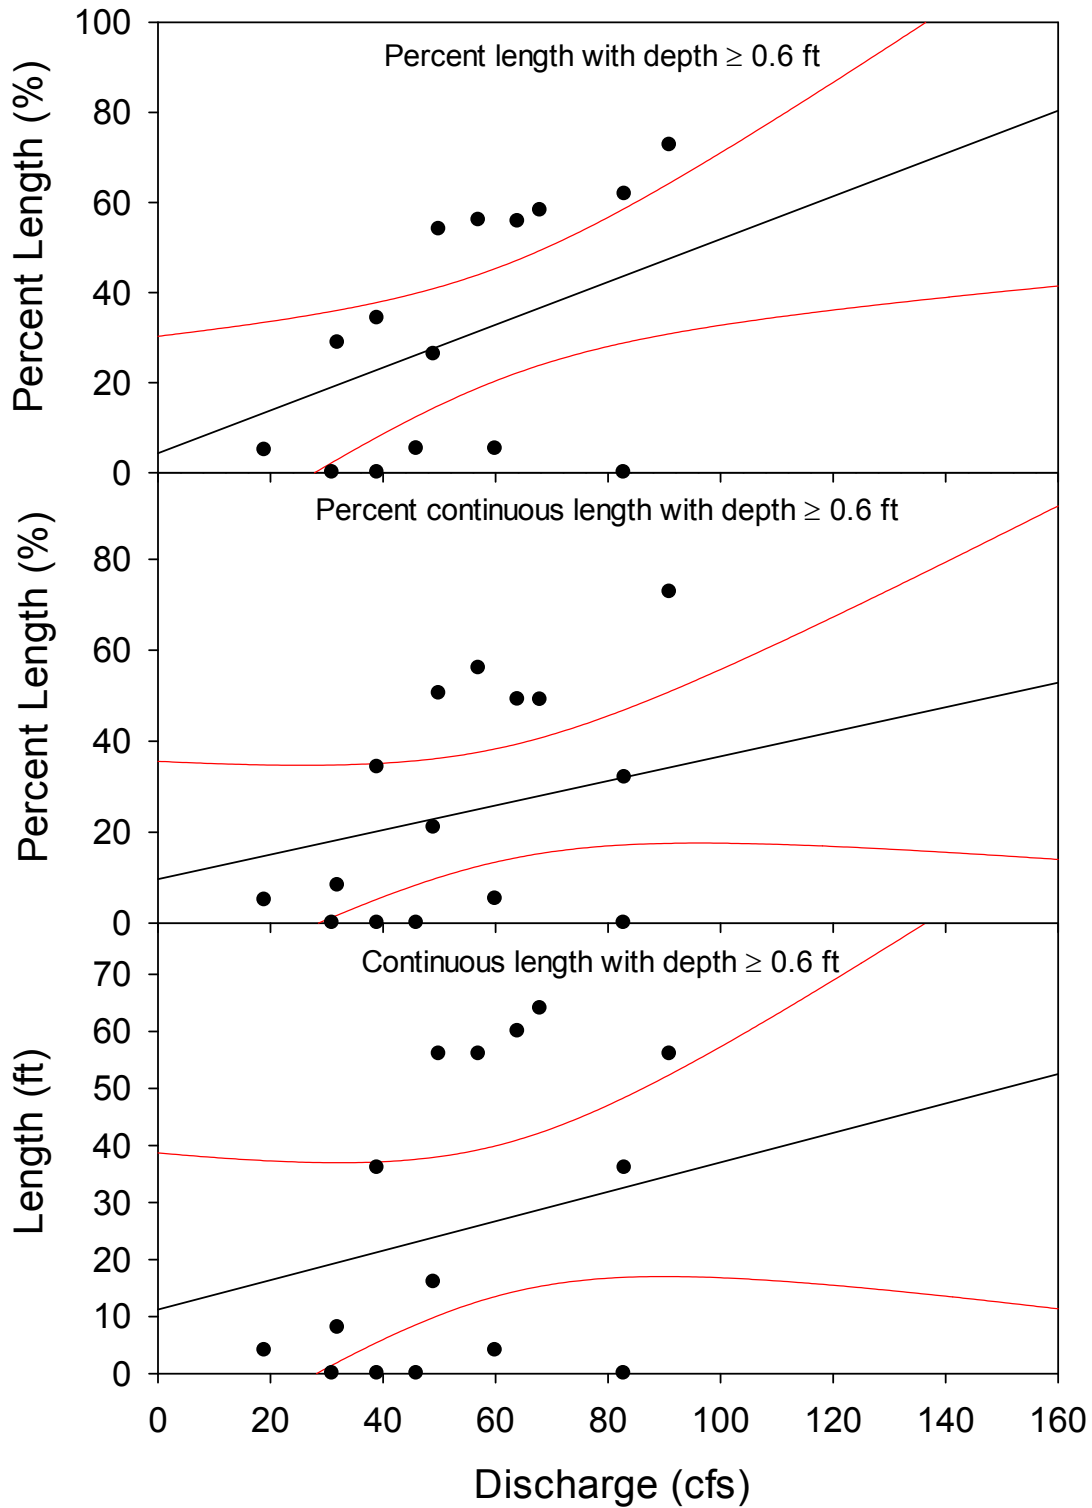

Appendix 14. Linear regression (and 95% CI) between Robles discharge and water depth at Site 10 downstream of Casitas Springs.


Appendix 15. Regression statistics of five passage criteria correlating Robles discharge and water depth at potential impediment sites. Calculated discharge (cfs) required from the Robles Fish Facility to meet five adult passage criteria and model results for BO minimum fish migration flow rate of 50 cfs. Sites ordered from upstream to downstream.

Site	rkm	Habitat type	n surveys	Regression Model	p-value	R ²	Adj. R ²	Calculated discharge to meet passage criteria (cfs)					Model Result	
								25%	10%	5 ft	8 ft	10 ft		50 cfs
8	22	CB	12	% length	0.052	0.33	0.26	-77						55%
				% cont lgth	0.001	0.66	0.63		6					28%
				ft cont lgth	0.000	0.77	0.75			16	22	28		20 ft
7	20	RB	16	% length	0.019	0.33	0.28	40						28%
				% cont lgth	0.001	0.54	0.50		5					30%
				ft cont lgth	0.008	0.41	0.37			3	11	16		23 ft
9	19	RB	14	% length	0.001	0.63	0.60	28						37%
				% cont lgth	0.013	0.41	0.36		5					19%
				ft cont lgth	0.011	0.43	0.38			-1	21	36		12 ft
6	17	CB	27	% length	0.183	0.07	0.03	56						24%
				% cont lgth	0.444	0.02	-0.02		-4					44%
				ft cont lgth	0.325	0.04	0.00			-29	14	42		11 ft
5-1	15	RI	15	% length	0.910	0.00	-0.08	-24451						0%
				% cont lgth	0.910	0.00	-0.08		-9551					0%
				ft cont lgth	0.918	0.00	-0.08			-2168	-3668	-4668		1 ft
5-2	15	RI	17	% length	0.006	0.41	0.37	77						15%
				% cont lgth	0.051	0.23	0.18		45					11%
				ft cont lgth	0.040	0.25	0.20			21	32	40		13 ft
4	14	RI	14	% length	0.029	0.34	0.29	70						17%
				% cont lgth	0.059	0.27	0.21		53					10%
				ft cont lgth	0.061	0.26	0.20			42	65	80		6 ft
3-2	12	RB	10	% length	0.272	0.15	0.04	96						27%
				% cont lgth	0.492	0.06	-0.06		38					10%
				ft cont lgth	0.806	0.01	-0.12			862	732	645		24 ft
3-1	11	RB	7	% length	0.753	0.02	-0.17	-91						19%
				% cont lgth	0.806	0.01	-0.18		290					7%
				ft cont lgth	0.731	0.03	-0.17			-194	-27	84		9 ft
10	11	RI	16	% length	0.016	0.35	0.30	43						28%
				% cont lgth	0.142	0.15	0.09		1					23%
				ft cont lgth	0.182	0.12	0.06			-24	-13	-5		24 ft
2	7	CB	5	% length	0.146	0.56	0.41	72						33%
				% cont lgth	0.113	0.62	0.50		67					13%
				ft cont lgth	0.199	0.47	0.30			117	112	109		46 ft

Appendix 16. Ventura River sandbar monitoring data from July 2017 through June 2018.

Date	Sandbar Breached (Y/N)	Time (24h)	Tide Height (ft)	Tidal State	High Tide		Low Tide		Mean Daily Discharge at Foster ^a (cfs)	Mean Daily Discharge at Robles (cfs)	Notes
					Time (24h)	Height (ft)	Time (24h)	Height (ft)			
07/07/2017	Y	11:31	3.28	ebb	10:08	3.63	14:51	2.22	6.77	0.0	Open, west bank
07/21/2017	Y	12:00	2.74	ebb	9:16	4.05	14:16	1.75	5.80	0.0	Open, west bank
08/18/2017	Y	11:40	2.97	slack	9:03	4.39	14:16	1.72	5.85	0.0	Open, west bank
08/29/2017	Y	12:22	3.32	flood	5:21	3.07	9:31	2.80	3.55	0.0	Open, west bank
09/15/2017	Y	12:59	2.39	slack	7:25	4.14	12:32	2.36	2.11	0.0	Open, west bank
09/29/2017	Y	12:03	3.00	ebb	17:48	4.48	1:04	0.79	2.19	0.0	Open, west bank
10/13/2017	N	10:44	2.77	slack	6:16	4.19	11:27	2.70	1.28	0.0	Closed
10/27/2017	N	12:01	3.60	slack	15:13	4.01	10:05	3.45	0.13	0.0	Closed
11/09/2017	N	14:45	4.30	slack	2:55	4.35	8:24	2.56	0.24	0.0	Closed
12/11/2017	N	10:52	1.65	slack	4:50	4.97	11:20	1.61	7.39	0.0	Closed
12/29/2017	N	10:47	1.20	slack	5:51	5.84	13:03	-0.12	0.15	0.0	Closed
01/01/2018	N	11:10	3.57	slack	8:00	7.01	15:18	-1.73	0.16	0.0	Closed
01/09/2018	Y	12:42	1.89	flood	4:02	4.75	10:56	1.48	1380.00	877	Open, west bank
01/18/2018	Y	10:15	5.44	slack	9:25	5.62	3:59	2.08	6.16	11.0	Open, west bank
02/01/2018	Y	13:00	2.40	slack	22:45	4.57	16:27	-1.52	3.26	8.0	Open, west bank
02/15/2018	Y	10:04	5.05	slack	12:55	4.05	3:16	1.44	1.72	8.0	Open, west bank
03/01/2018	Y	10:45	4.50	ebb	9:16	6.02	3:18	0.53	0.86	8.0	Open, west bank
03/19/2018	Y	9:45	4.50	ebb	23:35	4.99	6:05	0.33	4.77	13.0	Open, west bank
03/28/2018	Y	14:00	-0.70	ebb	8:39	5.58	14:40	-0.86	38.90	31.0	Open, west bank
04/13/2018	Y	10:45	3.50	ebb	9:11	4.75	3:16	0.50	13.10	18.0	Open, west bank
04/27/2018	Y	11:15	2.80	ebb	8:32	4.74	14:44	0.08	3.13	17.0	Open, west bank
05/11/2018	Y	13:45	0.59	ebb	7:24	3.98	13:37	0.59	2.04	16	Open, west bank
05/25/2018	Y	9:45	3.06	ebb	7:35	4.02	13:31	0.68	0.86	13.0	Open, west bank
06/08/2018	N	9:45	1.76	ebb	5:47	3.40	11:58	1.04	1.06	7.0	Closed
06/22/2018	N	12:49	1.27	slack	7:33	3.51	12:08	1.17	0.57	6.0	Closed

^aUSGS gauging station number 11118500, downstream of Foster Park.

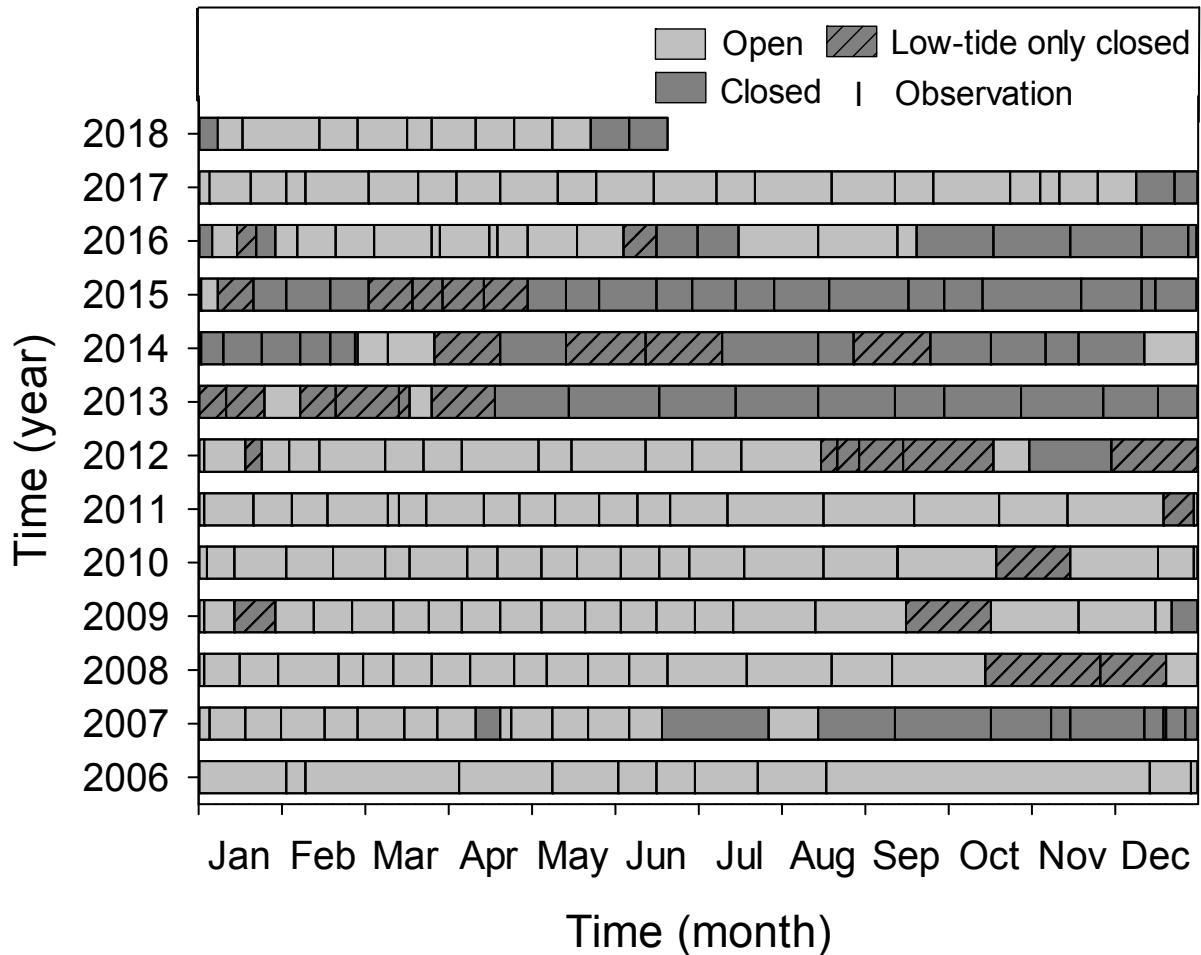

Appendix 17. Sandbar status at the mouth of the Ventura River from 2006 through July of 2018. Each observation is indicated by vertical lines and the sandbar status was assumed to remain unchanged until the next observation.

Appendix 18. Weekly fish attraction counts at the Robles Fish Facility during 2018.

Date	Method	Direction	Length (m)	Temp (°C)	Turbidity (NTU)	Robles Discharge (CFS)	Species ^a	Count
01/12/2018	Bank	Downstream	200	13	25	16	NFO	0
01/12/2018	Bank	Upstream	140	13	25	16	NFO	0
01/22/2018	Bank	Downstream	200	10	6	11	NFO	0
01/22/2018	Bank	Upstream	140	10	6	11	NFO	0
02/01/2018	Bank	Downstream	200	13	5	8	NFO	0
02/01/2018	Bank	Upstream	140	13	5	8	NFO	0
02/06/2018	Bank	Downstream	200	15	5	8	NFO	0
02/06/2018	Bank	Upstream	140	15	5	8	NFO	0
02/13/2018	Bank	Downstream	200	13	4	8	NFO	0
02/13/2018	Bank	Upstream	140	13	4	8	NFO	0
02/27/2018	Bank	Downstream	200	11	37	8	NFO	0
02/27/2018	Bank	Upstream	140	11	37	8	NFO	0
03/05/2018	Bank	Downstream	200	11	93	11	NFO	0
03/05/2018	Bank	Upstream	140	11	93	11	NFO	0
03/13/2018	Bank	Downstream	200	16	846	12	NFO	0
03/13/2018	Bank	Upstream	140	16	846	12	NFO	0
03/24/2018	Bank	Downstream	200	13	1054	77	NFO	0
03/24/2018	Bank	Upstream	140	13	1054	77	NFO	0
04/02/2018	Bank	Downstream	200	15	416	24	NFO	0
04/02/2018	Bank	Upstream	140	15	416	24	NFO	0
04/12/2018	Bank	Downstream	200	17	379	21	NFO	0
04/12/2018	Bank	Upstream	140	17	379	21	NFO	0
04/26/2018	Bank	Downstream	200	19	145	14	NFO	0
04/26/2018	Bank	Upstream	140	19	145	14	NFO	0
05/02/2018	Bank	Downstream	200	16	265	21	NFO	0
05/02/2018	Bank	Upstream	140	16	265	21	NFO	0
05/10/2018	Bank	Downstream	200	21	18	13	NFO	0
05/10/2018	Bank	Upstream	140	21	18	13	NFO	0
05/21/2018	Bank	Downstream	200	17	8	12	NFO	0
05/21/2018	Bank	Upstream	140	17	8	12	NFO	0
05/31/2018	Snorkel	Downstream	200	20	7	10	NFO	0
05/31/2018	Snorkel	Upstream	140	20	7	10	NFO	0
06/04/2018	Bank	Downstream	200	23	7	8	NFO	0
06/04/2018	Bank	Upstream	140	23	7	8	NFO	0
06/20/2018	Bank	Downstream	200	23	3	4	NFO	0
06/20/2018	Bank	Upstream	140	23	3	4	NFO	0
06/28/2018	Snorkel	Downstream	200	24	2	3	NFO	0
06/28/2018	Snorkel	Upstream	140	24	2	3	NFO	0
		Upstream	2,660 m				Upstream	0
		Downstream	3,940 m				Downstream	0
		Total	7,600 m				Total	0

^aOMY = *O. mykiss* and NFO = no fish observed.

^bPartial survey due to dry habitat unit.

Appendix 19. Post-storm fish attraction counts of *O. mykiss* at the Robles Fish Facility for 2018 Storm Events.

Date	Time	Method	Location	Temp (°C) ^a	Turbidity (NTU) ^a	Robles Discharge (CFS) ^a	Species ^b	Count
03/23/2018	9:00	Bank	Entrance Pool	13.3	2952	236	NFO	0
03/24/2018	15:11	Bank	Entrance Pool	13.4	1054	77	NFO	0
03/25/2018	9:30	Bank	Entrance Pool	13.3	759	51	NFO	0
03/26/2018	9:45	Bank	Entrance Pool	12.9	567	40	NFO	0
03/27/2018	16:15	Bank	Entrance Pool	13.1	835	35	NFO	0
03/28/2018	10:35	Bank	Entrance Pool	14.6	750	31	NFO	0
03/29/2018	11:00	Bank	Entrance Pool	15.6	541	29	NFO	0
03/30/2018	11:15	Bank	Entrance Pool	16.7	547	27	NFO	0
03/31/2018	9:45	Bank	Entrance Pool	17.3	530	26	NFO	0
04/01/2018	9:30	Bank	Entrance Pool	16.7	465	24	NFO	0
04/02/2018	9:30	Bank	Entrance Pool	15.4	417	24	NFO	0
04/03/2018	9:30	Bank	Entrance Pool	16.4	395	23	NFO	0
04/04/2018	9:45	Bank	Entrance Pool	16.9	353	22	NFO	0
04/05/2018	10:00	Bank	Entrance Pool	17.3	304	22	NFO	0

^aEnvironmental conditions at time of survey.

^bOMY = *O. mykiss* and NFO = no fish observed.

Appendix 20. Monthly flow summary for Robles Fish Facility, reporting year 2017-2018.

**Ventura River Flow Assessment
Water Year 2017 -2018**

	(1)	(2)	(1) + (2)	B.O. Required Flow Release (cfs)	(3)	(4)	(5)	(4) + (5)
	Source Stream Mean Daily Flows				Robles Facility Mean Daily Flows			
Jul-17	Matilija Ck D/S Dam (cfs)	North Fork Matilija Ck.* (cfs)	Sum of Creek Flows (cfs)		Fishway Ladder (cfs)	VRNMO Weir (cfs)	Diversion Canal (cfs)	Total Inflow (cfs)
1	5	1.0	6	20	0	0	0	0
2	5	1.0	6	20	0	0	0	0
3	5	1.0	6	20	0	0	0	0
4	4	0.9	5	20	0	0	0	0
5	4	0.9	5	20	0	0	0	0
6	3	0.9	4	20	0	0	0	0
7	3	0.9	4	20	0	0	0	0
8	3	0.9	4	20	0	0	0	0
9	3	0.9	4	20	0	0	0	0
10	3	0.8	3	20	0	0	0	0
11	3	0.8	3	20	0	0	0	0
12	2	0.8	3	20	0	0	0	0
13	2	0.8	3	20	0	0	0	0
14	2	0.8	3	20	0	0	0	0
15	2	0.7	2	20	0	0	0	0
16	2	0.7	2	20	0	0	0	0
17	2	0.7	2	20	0	0	0	0
18	2	0.7	2	20	0	0	0	0
19	2	0.7	2	20	0	0	0	0
20	2	0.7	2	20	0	0	0	0
21	1	0.6	2	20	0	0	0	0
22	1	0.6	2	20	0	0	0	0
23	2	0.6	2	20	0	0	0	0
24	2	0.6	2	20	0	0	0	0
25	2	0.6	3	20	0	0	0	0
26	3	0.6	3	20	0	0	0	0
27	3	0.5	4	20	0	0	0	0
28	3	0.5	4	20	0	0	0	0
29	3	0.5	4	20	0	0	0	0
30	4	0.5	4	20	0	0	0	0
31	3	0.5	4	20	0	0	0	0
Totals	85	23	108	620	0	0	0	0

*Flow data from North Fork Matilija Creek are preliminary and subject to change (VCWPD).

**Ventura River Flow Assessment
Water Year 2017 -2018**

	(1)	(2)	(1) + (2)	B.O. Required Flow Release (cfs)	(3)	(4)	(5)	(4) + (5)
	Source Stream Mean Daily Flows				Robles Facility Mean Daily Flows			
Aug-17	Matilija Ck D/S Dam (cfs)	North Fork Matilija Ck.* (cfs)	Sum of Creek Flows (cfs)		Fishway Ladder (cfs)	VRNMO Weir (cfs)	Diversion Canal (cfs)	Total Inflow (cfs)
1	3	0.5	3	20	0	0	0	0
2	2	0.4	3	20	0	0	0	0
3	2	0.4	3	20	0	0	0	0
4	3	0.4	3	20	0	0	0	0
5	3	0.4	3	20	0	0	0	0
6	2	0.4	3	20	0	0	0	0
7	2	0.4	3	20	0	0	0	0
8	2	0.4	3	20	0	0	0	0
9	2	0.4	3	20	0	0	0	0
10	2	0.4	3	20	0	0	0	0
11	2	0.4	3	20	0	0	0	0
12	2	0.4	2	20	0	0	0	0
13	2	0.4	2	20	0	0	0	0
14	2	0.4	3	20	0	0	0	0
15	2	0.4	3	20	0	0	0	0
16	3	0.4	3	20	0	0	0	0
17	2	0.3	3	20	0	0	0	0
18	2	0.3	3	20	0	0	0	0
19	2	0.3	3	20	0	0	0	0
20	2	0.3	3	20	0	0	0	0
21	2	0.3	3	20	0	0	0	0
22	2	0.3	3	20	0	0	0	0
23	2	0.3	3	20	0	0	0	0
24	3	0.3	3	20	0	0	0	0
25	3	0.3	3	20	0	0	0	0
26	3	0.3	3	20	0	0	0	0
27	3	0.3	3	20	0	0	0	0
28	3	0.3	3	20	0	0	0	0
29	3	0.3	4	20	0	0	0	0
30	3	0.3	3	20	0	0	0	0
31	3	0.3	3	20	0	0	0	0
Totals	76	11	87	620	0	0	0	0

*Flow data from North Fork Matilija Creek are preliminary and subject to change (VCWPD).

**Ventura River Flow Assessment
Water Year 2017 -2018**

	(1)	(2)	(1) + (2)	B.O. Required Flow Release (cfs)	(3)	(4)	(5)	(4) + (5)
	Source Stream Mean Daily Flows				Robles Facility Mean Daily Flows			
Sep-17	Matilija Ck D/S Dam (cfs)	North Fork Matilija Ck.* (cfs)	Sum of Creek Flows (cfs)		Fishway Ladder (cfs)	VRNMO Weir (cfs)	Diversion Canal (cfs)	Total Inflow (cfs)
1	2	0.3	2	20	0	0	0	0
2	2	0.3	3	20	0	0	0	0
3	2	0.3	3	20	0	0	0	0
4	3	0.3	3	20	0	0	0	0
5	3	0.3	3	20	0	0	0	0
6	3	0.3	3	20	0	0	0	0
7	3	0.3	3	20	0	0	0	0
8	2	0.3	3	20	0	0	0	0
9	2	0.3	3	20	0	0	0	0
10	3	0.3	3	20	0	0	0	0
11	3	0.3	3	20	0	0	0	0
12	3	0.3	3	20	0	0	0	0
13	3	0.3	3	20	0	0	0	0
14	3	0.3	3	20	0	0	0	0
15	3	0.3	3	20	0	0	0	0
16	3	0.3	3	20	0	0	0	0
17	3	0.3	3	20	0	0	0	0
18	3	0.3	3	20	0	0	0	0
19	3	0.3	3	20	0	0	0	0
20	3	0.3	3	20	0	0	0	0
21	2	0.3	3	20	0	0	0	0
22	2	0.3	3	20	0	0	0	0
23	2	0.3	3	20	0	0	0	0
24	3	0.3	3	20	0	0	0	0
25	3	0.3	3	20	0	0	0	0
26	2	0.3	3	20	0	0	0	0
27	2	0.3	3	20	0	0	0	0
28	2	0.3	3	20	0	0	0	0
29	2	0.3	2	20	0	0	0	0
30	2	0.3	2	20	0	0	0	0
Totals	76	10	86	600	0	0	0	0

*Flow data from North Fork Matilija Creek are preliminary and subject to change (VCWPD).

**Ventura River Flow Assessment
Water Year 2017 -2018**

	(1)	(2)	(1) + (2)	B.O. Required Flow Release (cfs)	(3)	(4)	(5)	(4) + (5)
	Source Stream Mean Daily Flows				Robles Facility Mean Daily Flows			
Oct-17	Matilija Ck D/S Dam* (cfs)	North Fork Matilija Ck.* (cfs)	Sum of Creek Flows (cfs)		Fishway Ladder (cfs)	VRNMO Weir (cfs)	Diversion Canal (cfs)	Total Inflow (cfs)
1	0.9	2.5	3	20	0	0	0	0
2	1	0.4	1	20	0	0	0	0
3	1	0.4	1	20	0	0	0	0
4	1	0.4	1	20	0	0	0	0
5	1	0.4	1	20	0	0	0	0
6	0.9	0.4	1	20	0	0	0	0
7	0.9	0.4	1	20	0	0	0	0
8	1	0.4	1	20	0	0	0	0
9	1	0.4	1	20	0	0	0	0
10	0.9	0.4	1	20	0	0	0	0
11	0.9	0.4	1	20	0	0	0	0
12	1	0.4	1	20	0	0	0	0
13	0.9	0.4	1	20	0	0	0	0
14	0.9	0.4	1	20	0	0	0	0
15	0.9	0.4	1	20	0	0	0	0
16	0.8	0.4	1	20	0	0	0	0
17	0.8	0.4	1	20	0	0	0	0
18	0.9	0.4	1	20	0	0	0	0
19	1	0.4	1	20	0	0	0	0
20	1	0.4	1	20	0	0	0	0
21	0.9	0.4	1	20	0	0	0	0
22	0.8	0.4	1	20	0	0	0	0
23	0.8	0.4	1	20	0	0	0	0
24	0.8	0.4	1	20	0	0	0	0
25	0.8	0.4	1	20	0	0	0	0
26	0.8	0.4	1	20	0	0	0	0
27	0.8	0.4	1	20	0	0	0	0
28	0.8	0.4	1	20	0	0	0	0
29	0.9	0.4	1	20	0	0	0	0
30	1	0.4	1	20	0	0	0	0
31	1	0.4	2	20	0	0	0	0
Totals	29	14	42	620	0	0	0	0

*Flow data from North Fork Matilija Creek are preliminary and subject to change (VCWPD).

**Ventura River Flow Assessment
Water Year 2017 -2018**

	(1)	(2)	(1) + (2)	B.O. Required Flow Release (cfs)	(3)	(4)	(5)	(4) + (5)
	Source Stream Mean Daily Flows				Robles Facility Mean Daily Flows			
Nov-17	Matilija Ck D/S Dam* (cfs)	North Fork Matilija Ck.* (cfs)	Sum of Creek Flows (cfs)		Fishway Ladder (cfs)	VRNMO Weir (cfs)	Diversion Canal (cfs)	Total Inflow (cfs)
1	1	0.4	2	20	0	0	0	0
2	1	0.4	2	20	0	0	0	0
3	1	0.4	2	20	0	0	0	0
4	1	0.4	2	20	0	0	0	0
5	1	0.4	2	20	0	0	0	0
6	1	0.4	2	20	0	0	0	0
7	1	0.4	2	20	0	0	0	0
8	1	0.4	2	20	0	0	0	0
9	1	0.4	2	20	0	0	0	0
10	1	0.4	2	20	0	0	0	0
11	1	0.4	2	20	0	0	0	0
12	1	0.4	2	20	0	0	0	0
13	1	0.4	2	20	0	0	0	0
14	1	0.4	2	20	0	0	0	0
15	1	0.4	2	20	0	0	0	0
16	1	0.4	2	20	0	0	0	0
17	1	0.4	2	20	0	0	0	0
18	1	0.4	2	20	0	0	0	0
19	1	0.4	2	20	0	0	0	0
20	1	0.4	2	20	0	0	0	0
21	1	0.5	2	20	0	0	0	0
22	1	0.5	2	20	0	0	0	0
23	1	0.5	2	20	0	0	0	0
24	1	0.5	2	20	0	0	0	0
25	1	0.5	2	20	0	0	0	0
26	1	0.5	2	20	0	0	0	0
27	2	0.5	2	20	0	0	0	0
28	2	0.5	2	20	0	0	0	0
29	1	0.5	2	20	0	0	0	0
30	1	0.5	2	20	0	0	0	0
Totals	40	13	53	600	0	0	0	0

*Flow data from North Fork Matilija Creek are preliminary and subject to change (VCWPD).

**Ventura River Flow Assessment
Water Year 2017 -2018**

	(1)	(2)	(1) + (2)	B.O. Required Flow Release (cfs)	(3)	(4)	(5)	(4) + (5)
	Source Stream Mean Daily Flows				Robles Facility Mean Daily Flows			
Dec-17	Matilija Ck D/S Dam* (cfs)	North Fork Matilija Ck.* (cfs)	Sum of Creek Flows (cfs)		Fishway Ladder (cfs)	VRNMO Weir (cfs)	Diversion Canal (cfs)	Total Inflow (cfs)
1	1	0.5	2	20	0	0	0	0
2	1	0.5	2	20	0	0	0	0
3	2	0.5	2	20	0	0	0	0
4	2	0.5	2	20	0	0	0	0
5	1	0.5	2	20	0	0	0	0
6	1	0.5	2	20	0	0	0	0
7	1	0.5	2	20	0	0	0	0
8	1	0.5	2	20	0	0	0	0
9	1	0.5	2	20	0	0	0	0
10	1	0.5	2	20	0	0	0	0
11	1	0.5	2	20	0	0	0	0
12	1	0.5	2	20	0	0	0	0
13	1	0.5	2	20	0	0	0	0
14	1	0.5	2	20	0	0	0	0
15	2	0.5	2	20	0	0	0	0
16	2	0.5	2	20	0	0	0	0
17	2	0.5	2	20	0	0	0	0
18	2	0.5	2	20	0	0	0	0
19	2	0.5	2	20	0	0	0	0
20	2	0.5	2	20	0	0	0	0
21	2	0.5	2	20	0	0	0	0
22	2	0.5	2	20	0	0	0	0
23	2	0.5	3	20	0	0	0	0
24	2	0.5	3	20	0	0	0	0
25	2	0.5	3	20	0	0	0	0
26	2	0.5	3	20	0	0	0	0
27	2	0.5	3	20	0	0	0	0
28	3	0.5	3	20	0	0	0	0
29	3	0.5	3	20	0	0	0	0
30	3	0.5	3	20	0	0	0	0
31	3	0.5	3	20	0	0	0	0
Totals	55	14	69	620	0	0	0	0

*Flow data from North Fork Matilija Creek are preliminary and subject to change (VCWPD).

**Ventura River Flow Assessment
Water Year 2017 -2018**

	(1)	(2)	(1) + (2)	B.O. Required Flow Release (cfs)	(3)	(4)	(5)	(4) + (5)
	Source Stream Mean Daily Flows				Robles Facility Mean Daily Flows			
Jan-18	Matilija Ck D/S Dam* (cfs)	North Fork Matilija Ck.* (cfs)	Sum of Creek Flows (cfs)		Fishway Ladder (cfs)	VRNMO Weir (cfs)	Diversion Canal (cfs)	Total Inflow (cfs)
1	3	0.5	3	20	0	0	0	0
2	3	0.5	3	20	0	0	0	0
3	3	0.5	3	20	0	0	0	0
4	3	0.5	3	20	0	0	0	0
5	3	0.5	4	20	0	0	0	0
6	3	0.5	4	20	0	0	0	0
7	3	0.5	4	20	0	0	0	0
8	5	1	6	20	0	0.1	0	0
9	445	56	501	20	1	877	0	877
10	50	9	59	50	21	32	0	32
11	41	4	45	50	19	19	0	19
12	36	2	38	50	14	16	0	16
13	34	2	36	50	12	15	0	15
14	31	1	32	50	11	13	0	13
15	29	1	30	50	11	13	0	13
16	27	1	28	50	10	13	0	13
17	26	1	27	50	9	12	0	12
18	24	1	25	50	9	11	0	11
19	22	1	23	50	9	11	0	11
20	20	1	21	40	8	11	0	11
21	18	1	19	30	8	11	0	11
22	17	1	18	30	8	11	0	11
23	16	1	17	30	8	10	0	10
24	15	1	16	30	8	10	0	10
25	15	1	16	30	7	10	0	10
26	13	1	14	30	7	10	0	10
27	11	1	12	30	7	10	0	10
28	10	1	11	30	6	9	0	9
29	7	1	9	30	6	8	0	8
30	4	1	5	30	6	9	0	9
31	4	1	5	30	6	8	0	8
Totals	941	96	1038	1050	212	1148	0	1148

*Flow data from North Fork Matilija Creek are preliminary and subject to change (VCWPD).

- Fishway flow meter malfunction. Discharge estimated.
- Period of flow over cut-off wall. Inflow estimated. Spill exceeded reliable accuracy of rating table.
- Peak flow met BO definition of potential migration event.
- Represents change on date dictated by storm flow augmentation ramp-down schedule.

**Ventura River Flow Assessment
Water Year 2017 -2018**

	(1)	(2)	(1) + (2)	B.O. Required Flow Release (cfs)	(3)	(4)	(5)	(4) + (5)
	Source Stream Mean Daily Flows				Robles Facility Mean Daily Flows			
Feb-18	Matilija Ck D/S Dam* (cfs)	North Fork Matilija Ck.* (cfs)	Sum of Creek Flows (cfs)		Fishway Ladder (cfs)	VRNMO Weir (cfs)	Diversion Canal (cfs)	Total Inflow (cfs)
1	3	1	4	30	6	8	0	8
2	3	1	5	30	6	8	0	8
3	3	1	5	30	5	8	0	8
4	3	1	5	30	5	8	0	8
5	3	1	5	30	5	8	0	8
6	3	1	5	30	5	8	0	8
7	3	1	5	30	5	8	0	8
8	3	1	5	30	5	8	0	8
9	3	1	5	30	5	8	0	8
10	3	1	4	30	5	8	0	8
11	3	1	4	30	5	8	0	8
12	3	1	4	30	5	8	0	8
13	3	1	4	30	5	8	0	8
14	3	1	4	30	6	9	0	9
15	3	1	4	30	6	8	0	8
16	3	1	4	30	5	6	0	6
17	3	1	4	30	5	7	0	7
18	3	1	4	30	5	7	0	7
19	3	2	4	30	5	6	0	6
20	3	2	4	30	5	6	0	6
21	3	2	4	30	5	7	0	7
22	3	2	4	30	5	7	0	7
23	2	2	4	30	5	7	0	7
24	2	2	4	30	5	7	0	7
25	2	2	4	30	5	7	0	7
26	2	2	4	30	5	7	0	7
27	2	2	4	30	6	8	0	8
28	2	2	4	30	6	7	0	7
Totals	81	38	119	840	148	210	0	210

*Flow data from North Fork Matilija Creek are preliminary and subject to change (VCWPD).

**Ventura River Flow Assessment
Water Year 2017 -2018**

	(1)	(2)	(1) + (2)	B.O. Required Flow Release (cfs)	(3)	(4)	(5)	(4) + (5)
	Source Stream Mean Daily Flows				Robles Facility Mean Daily Flows			
Mar-18	Matilija Ck D/S Dam* (cfs)	North Fork Matilija Ck.* (cfs)	Sum of Creek Flows (cfs)		Fishway Ladder (cfs)	VRNMO Weir (cfs)	Diversion Canal (cfs)	Total Inflow (cfs)
1	2	2	4	30	3	8	0	8
2	22	13	35	30	12	45	4	49
3	10	3	13	30	18	20	0	20
4	6	2	8	30	11	14	0	14
5	5	2	6	30	8	11	0	11
6	4	1	5	30	7	10	0	10
7	4	1	5	30	7	10	0	10
8	4	1	5	30	7	10	0	10
9	4	1	5	30	6	9	0	9
10	4	2	6	30	8	11	0	11
11	8	2	10	30	18	19	0	19
12	4	1	5	30	10	13	0	13
13	4	2	6	30	10	12	0	12
14	9	7	16	30	24	25	0	25
15	8	4	13	30	22	22	0	22
16	6	3	9	30	15	16	0	16
17	6	3	9	30	15	17	0	17
18	5	3	8	30	13	15	0	15
19	5	3	8	30	11	14	0	14
20	5	3	8	30	11	14	0	14
21	40	39	79	30	28	27	131	158
22	130	210	340	50	29	804	82	887
23	134	85	219	82	41	236	98	334
24	58	27	85	74	46	77	7	84
25	36	15	51	68	42	51	0	51
26	28	11	39	62	44	40	0	40
27	23	12	35	56	39	35	0	35
28	20	12	32	50	34	31	0	31
29	17	12	29	50	32	29	0	29
30	15	12	27	50	29	27	0	27
31	14	12	26	50	27	26	0	26
Totals	638	506	1144	1222	625	1698	322	2020

*Flow data from Matilija Creek and North Fork Malija Creek are preliminary and subject to change (VCWPD).

- Fishway flow meter malfunction. Discharge estimated.
- Peak flow met BO definition of potential migration event.
- Periods of spill exceeded reliable accuracy of rating table.
- Represents change on date dictated by storm flow augmentation ramp-down schedule.

**Ventura River Flow Assessment
Water Year 2017 -2018**

	(1)	(2)	(1) + (2)	B.O. Required Flow Release (cfs)	(3)	(4)	(5)	(4) + (5)
	Source Stream Mean Daily Flows				Robles Facility Mean Daily Flows			
Apr-18	Matilija Ck D/S Dam* (cfs)	North Fork Matilija Ck.* (cfs)	Sum of Creek Flows (cfs)		Fishway Ladder (cfs)	VRNMO Weir (cfs)	Diversion Canal (cfs)	Total Inflow (cfs)
1	13	12	25	50	25	24	0	24
2	13	12	25	40	24	24	0	24
3	13	12	25	30	23	23	0	23
4	12	11	23	30	22	22	0	22
5	10	11	21	30	21	22	0	22
6	9	11	21	30	21	21	0	21
7	9	11	20	30	20	21	0	21
8	9	11	20	30	19	20	0	20
9	8	11	19	30	18	19	0	19
10	8	11	19	30	18	19	0	19
11	9	11	19	30	17	19	0	19
12	10	11	21	30	19	21	0	21
13	8	11	19	30	16	17	0	17
14	8	10	18	30	15	16	0	16
15	8	10	19	30	16	16	0	16
16	8	10	19	30	15	16	0	16
17	8	10	18	30	14	15	0	15
18	8	10	18	30	14	16	0	16
19	8	10	18	30	14	16	0	16
20	8	10	18	30	14	16	0	16
21	8	10	17	30	13	15	0	15
22	7	10	17	30	13	15	0	15
23	7	10	17	30	12	15	0	15
24	7	9	17	30	12	15	0	15
25	8	9	17	30	11	15	0	15
26	7	9	17	30	11	14	0	14
27	7	9	17	30	11	14	0	14
28	7	9	16	30	10	14	0	14
29	7	9	16	30	10	14	0	14
30	7	9	16	30	10	15	0	15
Totals	261	309	570	930	476	530	0	530

*Flow data from Matilija Creek and North Fork Malija Creek are preliminary and subject to change (VCWPD).
 Represents change on date dictated by storm flow augmentation ramp-down schedule.

**Ventura River Flow Assessment
Water Year 2017 -2018**


	(1)	(2)	(1) + (2)	B.O. Required Flow Release (cfs)	(3)	(4)	(5)	(4) + (5)
	Source Stream Mean Daily Flows				Robles Facility Mean Daily Flows			
May-18	Matilija Ck D/S Dam* (cfs)	North Fork Matilija Ck.* (cfs)	Sum of Creek Flows (cfs)		Fishway Ladder (cfs)	VRNMO Weir (cfs)	Diversion Canal (cfs)	Total Inflow (cfs)
1	7	9	16	30	11	17	0	17
2	7	9	16	30	15	21	0	21
3	7	9	16	30	12	18	0	18
4	7	8	15	30	11	17	0	17
5	7	8	15	30	12	17	0	17
6	7	8	15	30	9	14	0	14
7	7	8	15	30	9	15	0	15
8	7	8	15	30	9	15	0	15
9	7	8	15	30	9	14	0	14
10	6	8	14	30	8	13	0	13
11	6	8	14	30	8	13	0	13
12	6	8	14	30	10	14	0	14
13	6	8	14	30	10	14	0	14
14	6	7	14	30	9	14	0	14
15	6	7	14	30	8	13	0	13
16	6	7	13	30	8	12	0	12
17	6	7	13	30	8	12	0	12
18	6	7	13	30	8	12	0	12
19	6	7	13	30	10	15	0	15
20	6	7	13	30	10	13	0	13
21	6	7	13	30	8	12	0	12
22	6	7	12	30	8	13	0	13
23	6	7	12	30	8	12	0	12
24	6	7	12	30	7	12	0	12
25	6	6	12	30	7	11	0	11
26	5	6	12	30	7	10	0	10
27	5	6	12	30	7	10	0	10
28	5	6	11	30	9	13	0	13
29	5	6	11	30	8	11	0	11
30	5	6	11	30	7	10	0	10
31	5	6	11	30	7	10	0	10
Totals	189	226	415	930	275	417	0	417

*Flow data from Matilija Creek and North Fork Malija Creek are preliminary and subject to change (VCWPD).


**Ventura River Flow Assessment
Water Year 2017 -2018**

	(1)	(2)	(1) + (2)	B.O. Required Flow Release (cfs)	(3)	(4)	(5)	(4) + (5)
	Source Stream Mean Daily Flows				Robles Facility Mean Daily Flows			
Jun-18	Matilija Ck D/S Dam* (cfs)	North Fork Matilija Ck.* (cfs)	Sum of Creek Flows (cfs)		Fishway Ladder (cfs)	VRNMO Weir (cfs)	Diversion Canal (cfs)	Total Inflow (cfs)
1	5	6	11	30	6	9	0	9
2	5	6	11	30	5	8	0	8
3	5	6	10	30	5	8	0	8
4	5	5	10	30	5	8	0	8
5	5	5	10	30	5	6	0	6
6	5	5	10	30	6	5	0	5
7	5	5	10	30	5	5	0	5
8	5	5	10	30	5	5	0	5
9	5	5	9	30	5	4	0	4
10	4	5	9	30	4	4	0	4
11	4	5	9	30	4	3	0	3
12	4	5	9	30	5	6	0	6
13	4	5	9	30	5	5	0	5
14	4	4	9	30	4	4	0	4
15	4	4	8	30	4	4	0	4
16	4	4	8	30	4	4	0	4
17	4	4	8	30	4	5	0	5
18	4	4	8	30	5	5	0	5
19	4	4	8	30	4	5	0	5
20	4	4	8	30	4	4	0	4
21	4	4	8	30	3	4	0	4
22	4	4	7	30	3	4	0	4
23	4	4	7	30	3	4	0	4
24	4	3	7	30	3	4	0	4
25	3	3	7	30	3	4	0	4
26	3	3	7	30	3	4	0	4
27	3	3	7	30	3	4	0	4
28	3	3	6	30	3	3	0	3
29	3	3	6	30	3	4	0	4
30	3	3	6	30	3	4	0	4
Totals	123	129	252	900	126	146	0	146

*Flow data from Matilija Creek and North Fork Malija Creek are preliminary and subject to change (VCWPD).

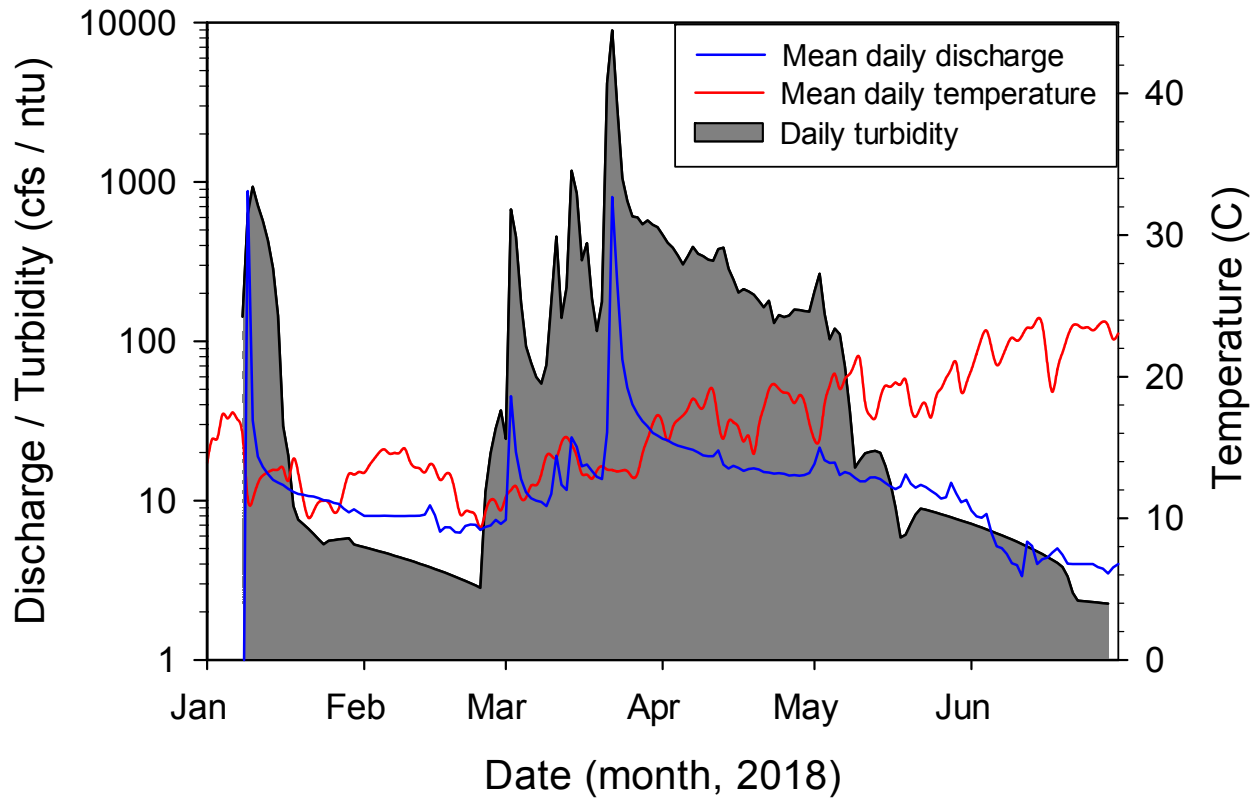

Appendix 21. Mean daily discharge, water temperature, and turbidity at the Robles Fish Facility during the 2017 fish passage season.

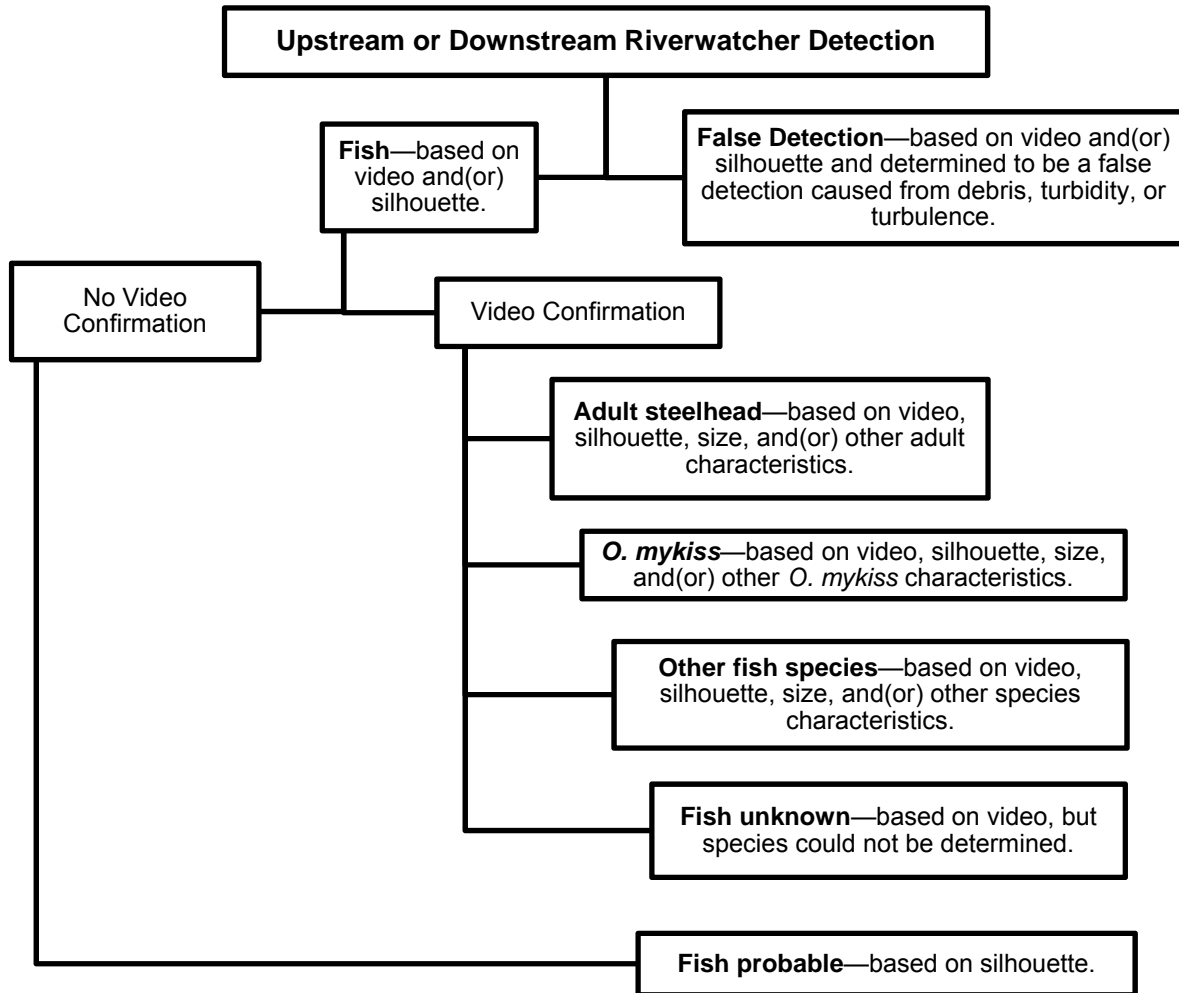


Appendix 22. Riverwatcher detection classification flow chart that outlines the pathways for upstream and downstream detections.

Appendix 23. Summary of Riverwatcher detections classified as fish probable and *O. mykiss* for the 2018 fish passage season.

	Upstream	Downstream
<i>O. mykiss</i>	0	0
Fish, non <i>O. mykiss</i>	0	0
Fish, unknown	0	0
Fish, probable	0	0
False detections	546	740
Total	740	546
Mean date - <i>O. mykiss</i>	n/a	n/a
Mean date - fish, non <i>O. mykiss</i>	n/a	n/a
Mean date - fish, unknown	n/a	n/a
Mean date - fish, probable	n/a	n/a
Mean time - <i>O. mykiss</i> (24h)	n/a	n/a
Mean time - fish, non <i>O. mykiss</i> (24h)	n/a	n/a
Mean time - fish, unknown (24h)	n/a	n/a
Mean time - fish, probable (24h)	n/a	n/a
Mean length - <i>O. mykiss</i> (cm)	n/a	n/a
Mean length - fish, non <i>O. mykiss</i> (cm)	n/a	n/a
Mean length - fish, unknown (cm)	n/a	n/a
Mean length - fish, probable (cm)	n/a	n/a
Mean daily temperature - <i>O. mykiss</i> (°C)	n/a	n/a
Mean daily temperature - fish, non <i>O. mykiss</i> (°C)	n/a	n/a
Mean daily temperature - fish, unknown (°C)	n/a	n/a
Mean daily temperature - fish, probable (°C)	n/a	n/a
Mean daily turbidity - <i>O. mykiss</i> (NTU)	n/a	n/a
Mean daily turbidity - fish, non <i>O. mykiss</i> (NTU)	n/a	n/a
Mean daily turbidity - fish, unknown (NTU)	n/a	n/a
Mean daily turbidity - fish, probable (NTU)	n/a	n/a
Mean daily turbidity - false detections (NTU)	65	58
Mean daily discharge - <i>O. mykiss</i> (cfs)	n/a	n/a
Mean daily discharge - fish, non <i>O. mykiss</i> (cfs)	n/a	n/a
Mean daily discharge - fish, unknown (cfs)	n/a	n/a
Mean daily discharge - fish, probable (cfs)	n/a	n/a
Mean daily discharge - false detections (cfs)	12	13

Appendix 24. *O. mykiss* relative abundance survey index sites in the Ventura Basin.


Site No.	Location	River km	Site	Lat.	Long.	Length (m)	Width (m)
1	Ventura River	0.9	Main Street pool	34.28126	-119.30887	25.1	10.0
		0.9	Main Street riffle	34.28164	-119.30893	34.0	8.0
2	Ventura River	9.4	Foster Park pool 1	34.35236	-119.30790	25.0	15.4
		10.0	Foster Park pool 2	34.35508	-119.30988	46.0	16.0
		9.7	Foster Park riffle	34.35308	-119.30877	45.0	11.0
3	Ventura River	13.0	San Antonio conf. pool 1	34.38042	-119.30752	33.0	22.0
		13.0	San Antonio conf. riffle	34.38011	-119.30755	42.0	14.0
		12.9	San Antonio conf. pool 2	34.37969	-119.30781	50.0	10.0
4	Ventura River	18.8	Hwy 150 pool 1	34.42643	-119.30220	43.3	14.0
		18.8	150 pool 2	34.42689	-119.30123	49.5	9.0
		18.7	Hwy 150 riffle	34.42576	-119.30258	43.6	11.0
5	Ventura River	22.1	Land Cons. pool 1	34.45342	-119.29314	50.1	19.1
		22.2	Land Cons. pool 2	34.45448	-119.29293	48.6	15.1
		22.1	Land Cons. Riffle	34.45411	-119.29315	44.6	18.8
6	Ventura River	23.2	Robles weir pools	34.46306	-119.29058	58.7	19.0
		23.3	Robles glide	34.46368	-119.29065	78.3	17.3
		23.4	Robles entrance pool	34.46446	-119.29058	39.8	21.8
		23.4	Fish ladder entrance box	34.46460	-119.29062	15.0	3.0
		23.5	Robles screenbay	34.46451	-119.29133	42.2	13.5
		23.5	Robles forebay	34.46503	-119.29053	33.0	17.2
7	San Antonio Cr.	0.2	Lower San Antonio pool 1	34.38088	-119.30542	16.0	6.0
		0.2	Lower San Antonio riffle	34.38098	-119.30711	20.2	3.5
		0.4	Lower San Antonio pool 2	34.38103	-119.30657	40.0	6.0
8	San Antonio Cr.	9.4	Upper San Antonio riffle	34.43268	-119.25090	25.0	5.0
		9.5	Upper San Antonio pool	34.43241	-119.25095	19.8	5.5
9	NF Matilija Cr.	0.1	Lower NF pool 1	34.48508	-119.30105	7.3	13.3
		0.1	Lower NF pool 2	34.48533	-119.30138	7.9	10.9
		0.2	Lower NF riffle	34.48523	-119.30198	17.8	8.0
10	NF Matilija Cr.	6.6	Upper NF pool	34.50956	-119.27520	29.0	9.0
		6.6	Upper NF riffle	34.50933	-119.27528	33.1	7.5
11	Matilija Cr.	0.3	Lower Matilija pool	34.48282	-119.30170	21.1	24.7
		0.3	Lower Matilija riffle	34.48302	-119.30154	15.9	8.0
12	Matilija Cr.	2.1	Upper Matilija pool	34.49190	-119.31599	89.4	13.7
		2.1	Upper Matilija riffle	34.49233	-119.31704	51.0	9.0
14	San Antonio Cr.	4.3	Fraser St. pool	34.40276	-119.28169	12.8	13.8
		4.4	Fraser St. riffle	34.40291	-119.28157	30.8	5.9
15	Ventura River	8.5	Bedrock pool	34.34539	-119.29931	50.0	17.0
		8.5	Bedrock pool riffle	34.34569	-119.29958	37.0	6.0

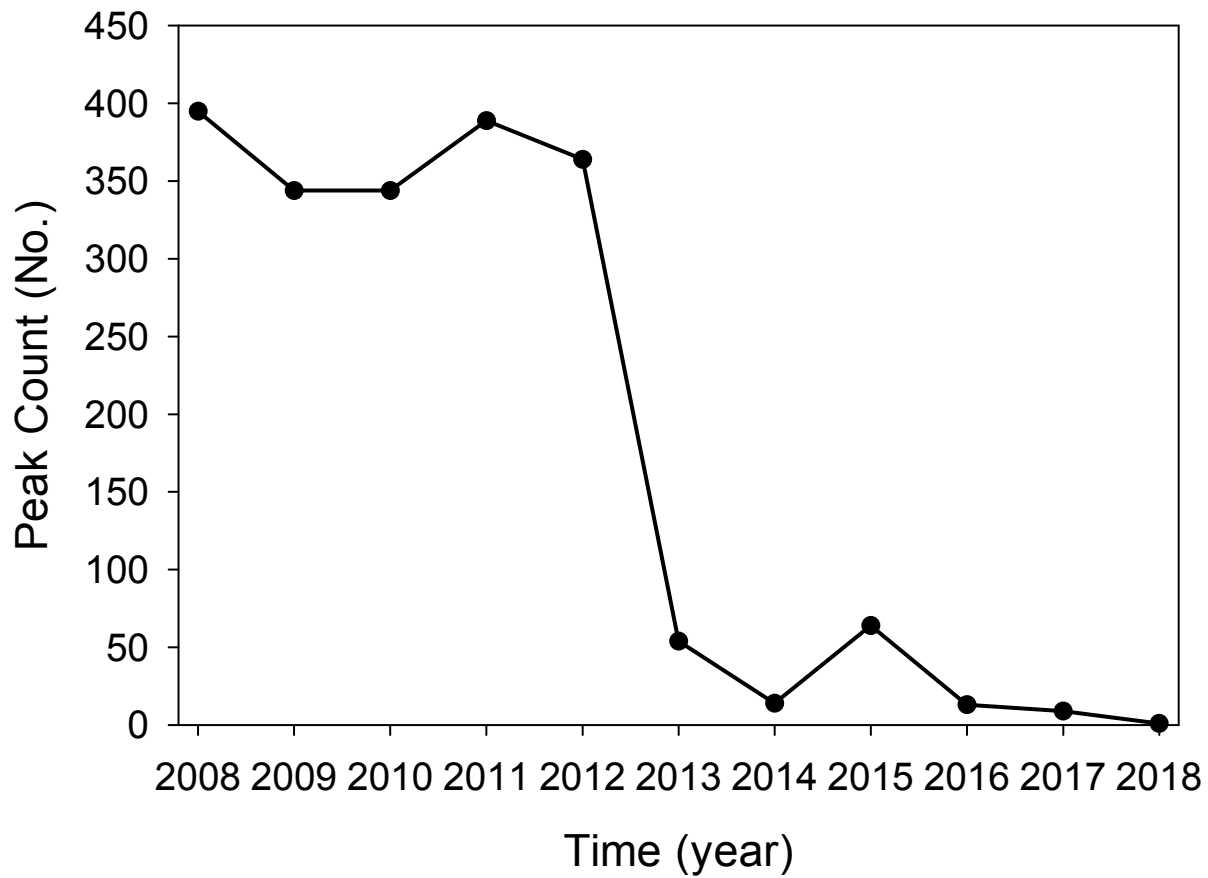


Appendix 25. Peak snorkel counts of *O. mykiss* during the period 2008-2018 at survey index sites in the Ventura Basin.

Appendix 26. *O. mykiss* spawning index sites in the Ventura Basin.

Site No.	Unit	Location	River km	Description	Lat.	Long.	Length (m)	Width (m)	Spawning Area (m ²)
24	1	Ventura River	0.8	Main St. Bridge	34.28085	-119.30862	220.0	10.0	2,200
2	1	Ventura River	7.9	Near Treatment Plant	34.34030	-119.29782	90.0	18.0	1,620
	2		8.1	Near Treatment Plant	34.34208	-119.29849	39.0	20.0	780
4	1	Ventura River	15.5	Near Santa Ana Blvd bridge	34.39950	-119.30853	26.7	8.0	214
5	1	Ventura River	18.7	Upstream of Hwy 150	34.42641	-119.30227	18.0	10.0	180
6	1	Ventura River	22.1	Land Conservancy pool tailout	34.45334	-119.29309	18.1	19.5	353
	2		22.2	Land Conservancy pool tailout	34.45445	-119.29298	16.3	14.7	240
7	1	Ventura River	23.3	Robles-1st weir pool	34.46334	-119.29061	15.4	23.9	368
	2		23.4	Robles tailout of entrance pool	34.46436	-119.29045	18.2	21.9	399
8	2	Ventura River	24.3	Upstream of Robles	34.46504	-119.29032	6.2	15.4	95
	3		23.4	Upstream of Robles forebay	34.46504	-119.29032	80.0	6.0	480
12	1	NF Matilija Cr.	0.7	Lower NF Matilija Cr.	34.48825	-119.30525	41.0	9.0	369
13	1	NF Matilija Cr.	6.6	Downstream of Wheeler Gorge	34.50911	-119.27501	23.0	8.0	184
	2		6.6	Downstream of Wheeler Gorge	34.50960	-119.27528	22.3	8.0	178
14	1	Matilija Cr.	1.9	Lake Matilija delta	34.49000	-119.31446	26.2	14.6	383
	2		2.1	Upstream of Lake Matilija	34.49198	-119.31645	15.0	10.0	150
	3		2.2	Upstream of Lake Matilija	34.49209	-119.31661	315	9.0	2,835
15	1	Matilija Cr.	8.4	End of Matilija Road	34.50456	-119.37449	20.0	19.0	380
17	1	Ventura River	9.3	DS of Foster to US reach	34.35069	-119.30463	1750	11.0	19,250
18	1	Ventura River	12.3	Casitas Springs	34.37354	-119.30877	60	12.0	960
	2		12.7	Casitas Springs	34.37712	-119.30721	230	9.0	2070
19	1	San Antonio Cr.	0.0	Mouth to end of Old Cr. Rd. reach	34.38030	-119.30738	2160	8.0	17,280
20	1	San Antonio Cr.	4.2	DS to US of Frasier St.	34.40197	-119.28237	180	8.0	1,440
21	1	San Antonio Cr.	7.8	Camp Comfort reach	34.42493	-119.26110	690	5.0	3,450
22	1	San Antonio Cr.	9.5	Upper San Antonio Cr. reach	34.43269	-119.25087	640	5.0	3,200
23	1	NF Matilija Cr.	0.1	Lower NF Matilija Cr.	34.48520	-119.30118	120	6.0	720
25	1	NF Matilija Cr.	4.1	Near Wheeler's Springs Reach	34.50826	-119.28955	300	4.5	1,350
26	1	NF Matilija Cr.	1.0	Downstream of NF gage bridge	34.49049	-119.30586	302	4.3	1,299
27	1	Matilija Cr.	5.7	Upstream Matilija hot springs	34.50030	-119.34993	105	8.0	840
Total =									63,266

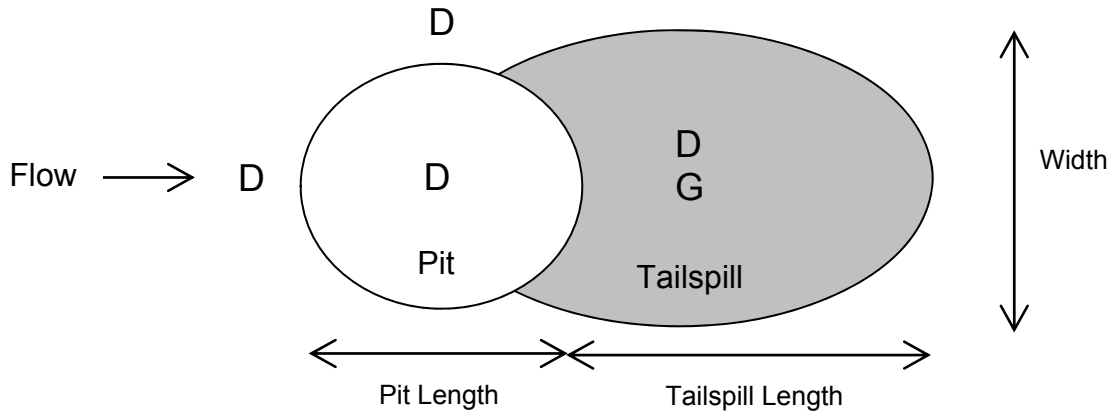

Appendix 27. Diagram of *O. mykiss* redds measurements. (D) = locations of depth measurements and (G) = location of gravel substrate sampling.

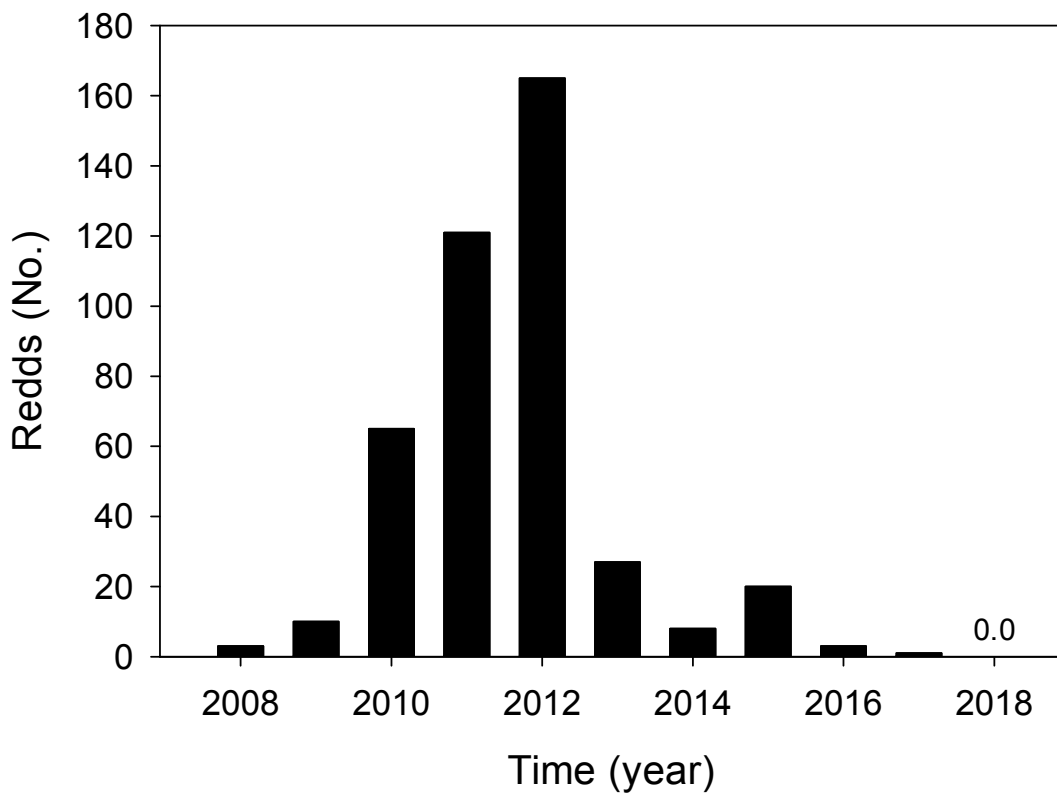


Appendix 28. Total number of *O. mykiss* redds counted at index spawning sites from 2008 through 2018 spawning years.

Appendix 29. Water quality monitoring sites and sampling summary.


Site Number	Site Description	Site Location ^a	Sampling Method ^b	Sampling Type ^c	Frequency
1	Estuary	V 0.3 km	Multiparameter	Grab profile	Monthly
2	Main St. Bridge	V 1.0 km	Temperature Multiparameter	Continuous Grab	30 min Monthly
3	Foster Park	V 9.7 km	Temperature Multiparameter	Continuous Grab	30 min Monthly
4	Santa Ana Blvd Bridge	V 15.5 km	Temperature Multiparameter	Continuous Grab	30 min Monthly
5	Hwy 150 Bridge	V 18.7 km	Temperature Multiparameter	Continuous Grab	30 min Monthly
6	Robles Dam	V 23.5 km	Temperature Multiparameter Turbidity Weather	Continuous Grab Continuous Continuous	30 min Monthly Hourly 30 min
7	North Fork Matilija	N 1.3 km	Temperature Multiparameter	Continuous Grab	30 min Monthly
8	Below Matilija Dam	M 1.0 km	Temperature Multiparameter	Continuous Grab	30 min Monthly
9	Above Matilija Dam	M 2.1 km	Temperature Multiparameter	Continuous Grab	30 min Monthly
10	Middle Matilija	M 8.5 km	Temperature Multiparameter	Continuous Grab	30 min Monthly
11	Lower San Antonio	S 0.3 km	Temperature Multiparameter	Continuous Grab	30 min Monthly
12	Middle San Antonio	S 9.5 km	Temperature Multiparameter	Continuous Grab	30 min Monthly
13	Lower Coyote	C 0.4 km	Temperature Multiparameter	Continuous Grab	30 min Monthly
14	Fraser St.	S 4.4 km	Temperature	Continuous	30 min

^aSite location is identified by the river system and kilometers from its confluence. C = Coyote Creek, M = Matilija Creek, N = North Fork Matilija Creek, S = San Antonio Creek, V = Ventura River.


^bTemperature data were collected using programmable loggers. Multiparameter water quality probe was used to collect water quality data including: temperature, dissolved oxygen, conductivity, salinity, pH, turbidity (separate meter). Turbidity data was collected using a programmable logger.

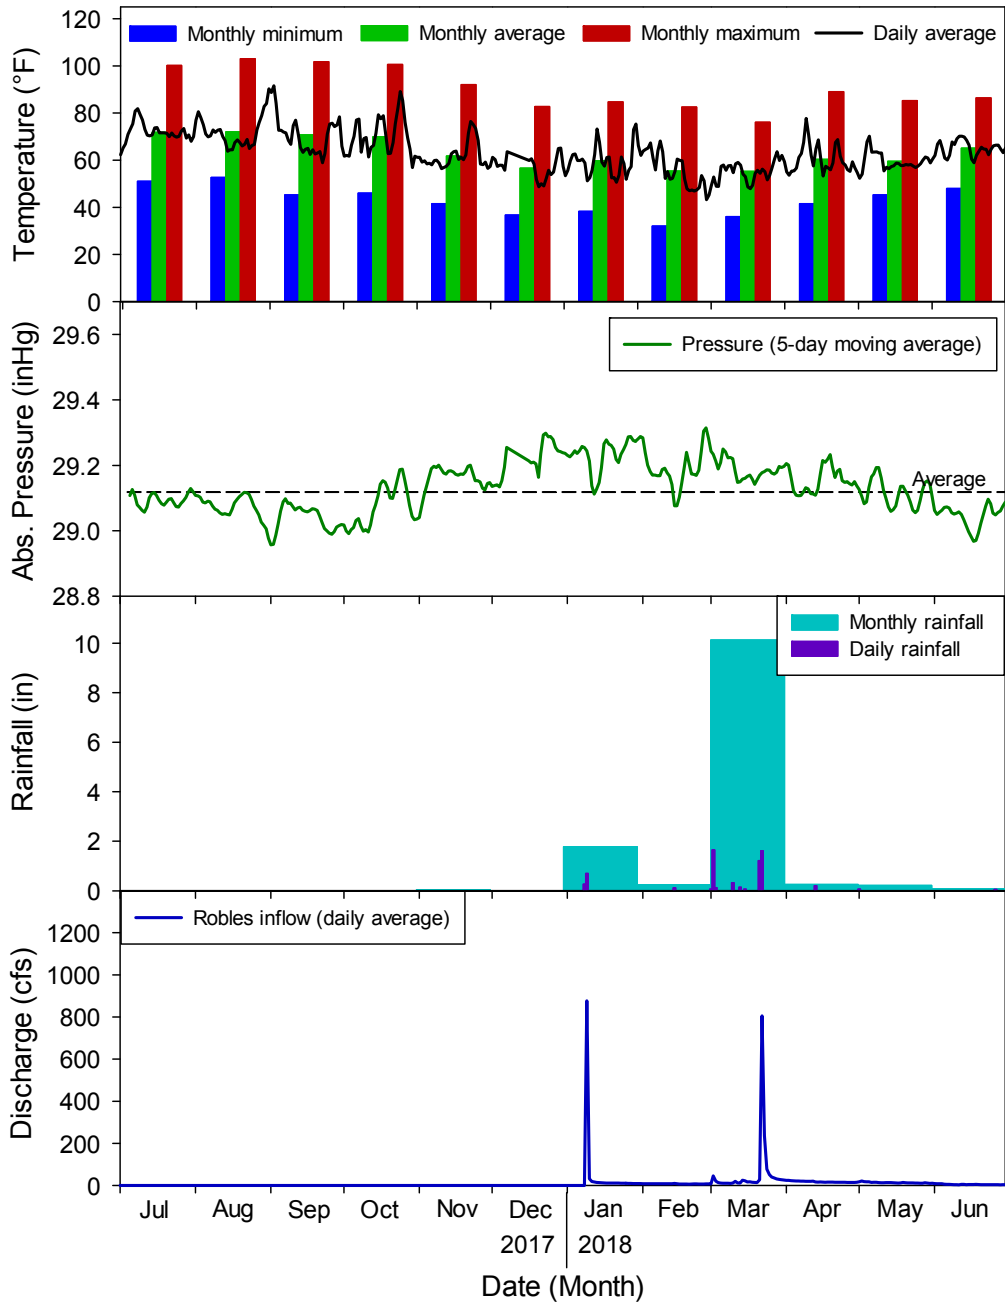

Appendix 30. Summary of weather and discharge data from the Robles Fish Facility for the reporting period.

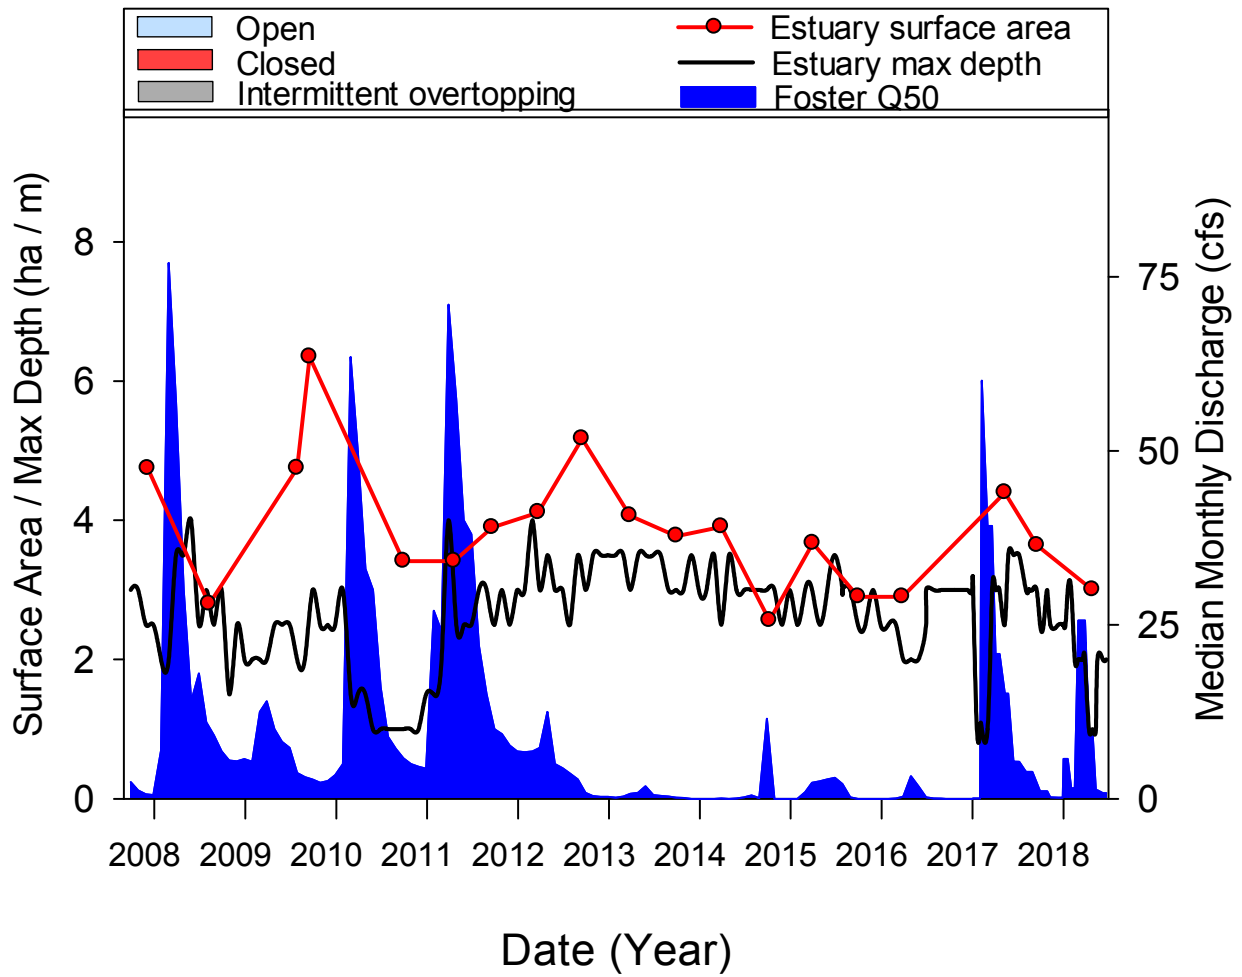

Appendix 31. Ventura River estuary/lagoon water depth, surface area, sandbar status, and discharge at Foster Park from 2008 to 2018.

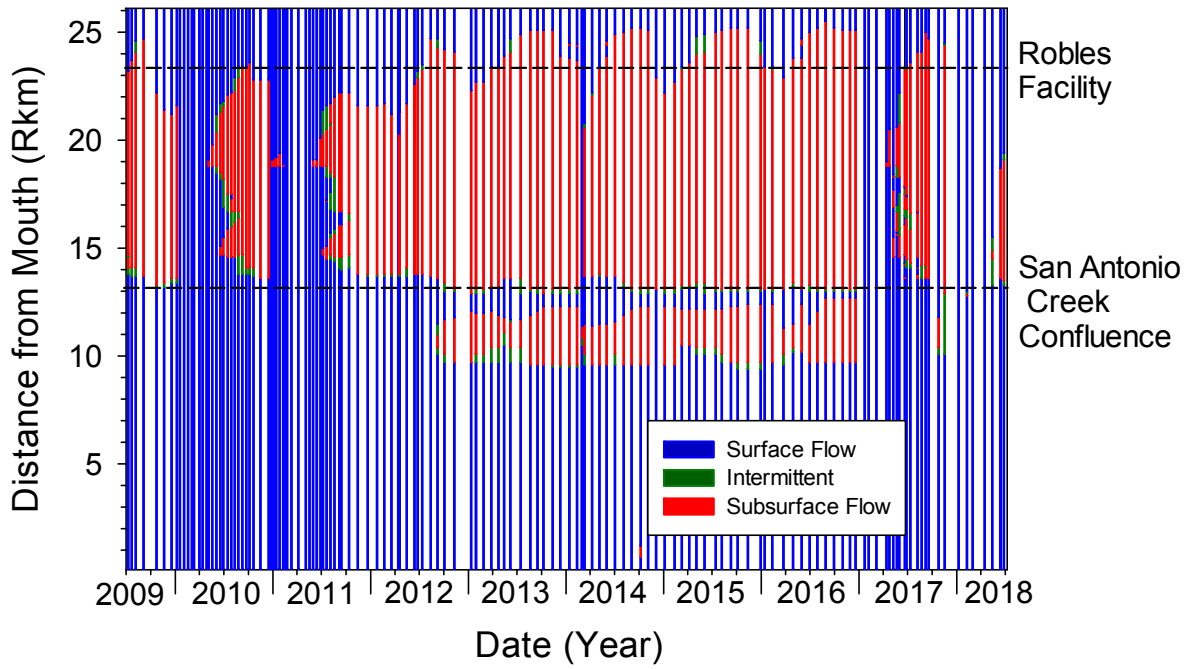


Appendix 32. Ventura River channel surface flow monitoring from 2008 to 2018.

Appendix 33. Photographic monitoring sites within the Ventura River basin.

Site Number	Site Description	Site Location ^a	Photo Direction	Frequency
1	Train bridge in estuary, east bank	V 0.3 km	Downstream	Biannual
2	Train bridge in estuary, west bank	V 0.3 km	Upstream Downstream	Biannual
3	Main Street Bridge	V 1.0 km	Upstream Downstream	Biannual
4	Shell Road Bridge	V 5.2 km	Upstream Downstream	Biannual
5	Casitas Vista Road Bridge (Foster Park)	V 9.7 km	Upstream Downstream	Biannual
6	Santa Ana Boulevard Bridge	V 15.5 km	Upstream Downstream	Biannual
7	Highway 150 Bridge	V 18.7 km	Upstream Downstream	Biannual
8	Robles Fish Passage Facility	V 23.5 km	Downstream	Biannual
9	Camino Cielo Road Bridge	V 25.7 km	Upstream Downstream	Biannual
10	Highway 33 Bridge at NF Matilija USGS Gauging Station	N 1.3 km	Upstream Downstream	Biannual
11	End of North Matilija Road	M 8.5 km	Upstream Downstream	Biannual
12	Highway 33 Bridge near Old Creek Road	S 0.3 km	Upstream Downstream	Biannual
13	Creek Road near Creek Lane	S 9.5 km	Upstream Downstream	Biannual
14	Santa Ana Road Bridge	C 0.4 km	Upstream Downstream	Biannual

^aSite location is identified by the river or tributary system and kilometers from its confluence.
C = Coyote Creek, M = Matilija Creek, N = North Fork Matilija Creek, S = San Antonio Creek, V = Ventura River.

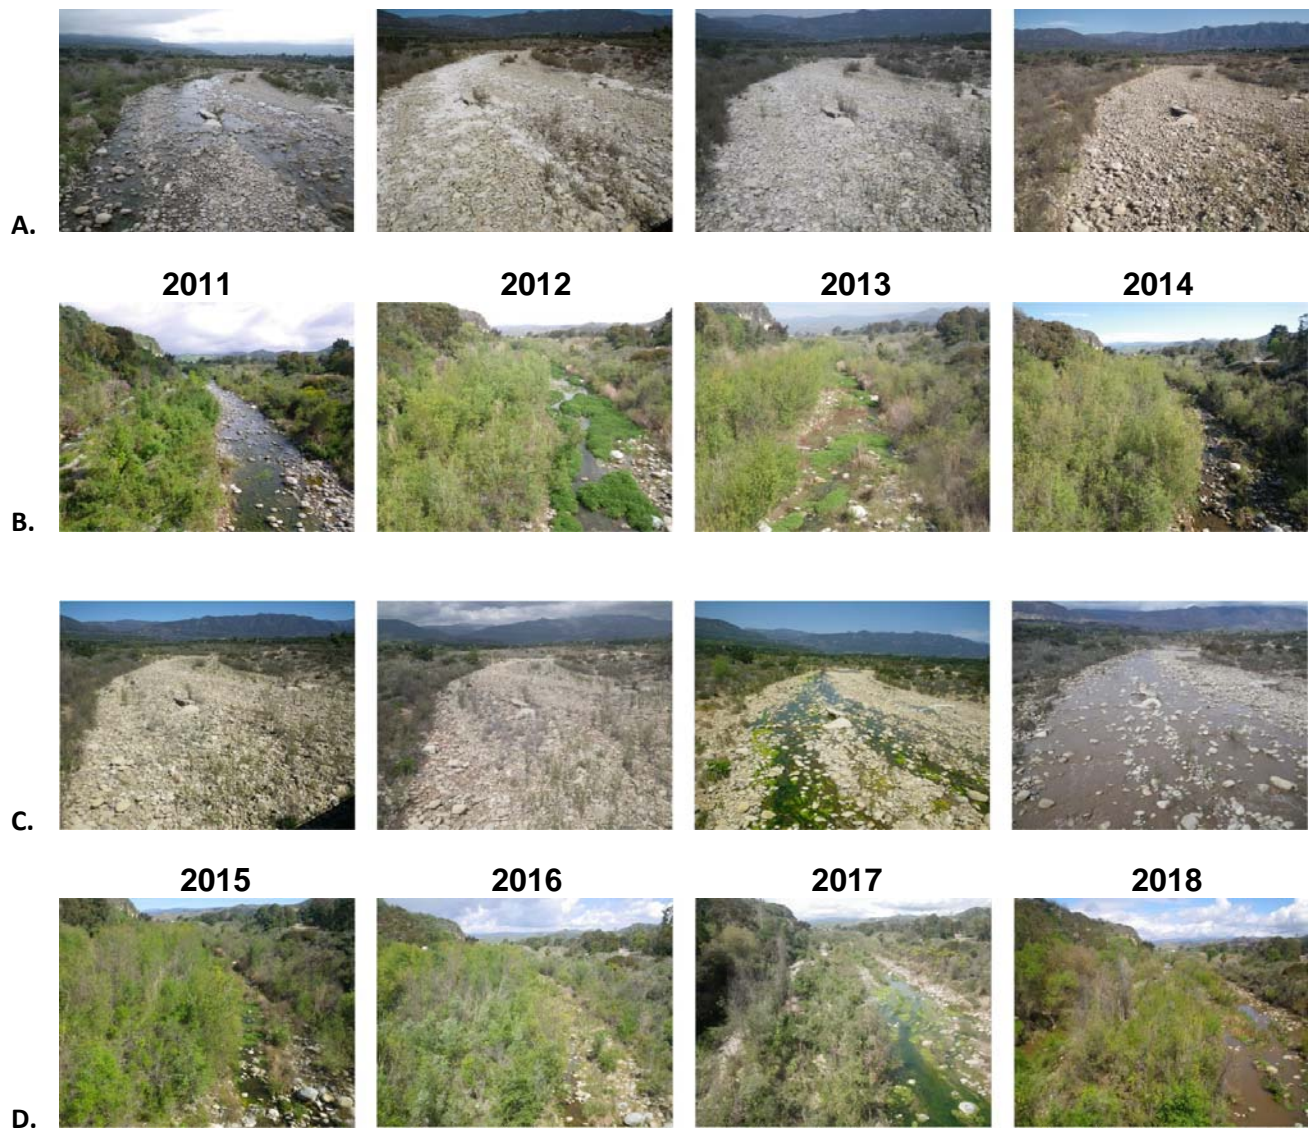

Appendix 34. Multiple year photo comparison of ephemeral and perennial reaches of the Ventura River. Photo series row A and row C are looking upstream from Hwy 150 bridge. Photo series row B and row D are looking upstream from the bridge near the Shell Rd exit off Hwy 33.